



Advanced Message Queuing Protocol (AMQP) JMS Mapping Version 1.0

Working Draft 4

24 February 2014

Specification URIs

This version:

<http://docs.oasis-open.org/amqp-bindmap/jms/v1.0/wd04/amqp-bindmap-jms-v1.0-wd04.xml> (Authoritative)

<http://docs.oasis-open.org/amqp-bindmap/jms/v1.0/wd04/amqp-bindmap-jms-v1.0-wd04.html>

<http://docs.oasis-open.org/amqp-bindmap/jms/v1.0/wd04/amqp-bindmap-jms-v1.0-wd04.pdf>

Previous version:

N/A

Latest version:

<http://docs.oasis-open.org/amqp-bindmap/jms/v1.0/amqp-bindmap-jms-v1.0.html>

<http://docs.oasis-open.org/amqp-bindmap/jms/v1.0/amqp-bindmap-jms-v1.0.pdf>

<http://docs.oasis-open.org/amqp-bindmap/jms/v1.0/amqp-bindmap-jms-v1.0.xml> (Authoritative)

Technical Committee:

OASIS Advanced Message Queuing Protocol (AMQP) Bindings and Mappings (AMQP-BINDMAP) TC

Chairs:

Steve Huston (shuston@riverace.com), Individual

Editors:

Robert Gemmell (robert.gemmell@jpmchase.com), JPMorgan Chase & Co.

Robert Godfrey (robert.godfrey@jpmorgan.com), JPMorgan Chase & Co.

Abstract:

TODO

Status:

This document was last revised or approved by the membership of OASIS on the above date. The level of approval is also listed above. Check the “Latest version” location noted above for possible later revisions of this document.

Technical Committee members should send comments on this specification to the Technical Committee’s email list. Others should send comments to the Technical Committee by using the “Send A Comment” button on the Technical Committee’s web page at <http://www.oasis-open.org/committees/amqp-bindmap/>.

For information on whether any patents have been disclosed that may be essential to implementing this specification, and any offers of patent licensing terms, please refer to the Intellectual Property Rights section of the Technical Committee web page (<http://www.oasis-open.org/committees/amqp-bindmap/ipr.php>).

Citation format:

When referencing this specification the following citation format should be used:

[amqp-bindmap-jms-v1.0]

Advanced Message Queuing Protocol (AMQP) JMS Mapping Version 1.0. 24 February 2014. OASIS Working Draft 4.

<http://docs.oasis-open.org/amqp-bindmap/jms/v1.0/wd04/amqp-bindmap-jms-v1.0-wd04.pdf>.

Notices:

Copyright © OASIS Open 2013. All Rights Reserved.

All capitalized terms in the following text have the meanings assigned to them in the OASIS Intellectual Property Rights Policy (the "OASIS IPR Policy"). The full Policy may be found at the OASIS website.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published, and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this section are included on all such copies and derivative works. However, this document itself may not be modified in any way, including by removing the copyright notice or references to OASIS, except as needed for the purpose of developing any document or deliverable produced by an OASIS Technical Committee (in which case the rules applicable to copyrights, as set forth in the OASIS IPR Policy, must be followed) or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by OASIS or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and OASIS DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY OWNERSHIP RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

OASIS requests that any OASIS Party or any other party that believes it has patent claims that would necessarily be infringed by implementations of this OASIS Committee Specification or OASIS Standard, to notify OASIS TC Administrator and provide an indication of its willingness to grant patent licenses to such patent claims in a manner consistent with the IPR Mode of the OASIS Technical Committee that produced this specification.

OASIS invites any party to contact the OASIS TC Administrator if it is aware of a claim of ownership of any patent claims that would necessarily be infringed by implementations of this specification by a patent holder that is not willing to provide a license to such patent claims in a manner consistent with the IPR Mode of the OASIS Technical Committee that produced this specification. OASIS may include such claims on its website, but disclaims any obligation to do so.

OASIS takes no position regarding the validity or scope of any intellectual property or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; neither does it represent that it has made any effort to identify any such rights. Information on OASIS' procedures with respect to rights in any document or deliverable produced by an OASIS Technical Committee can be found on the OASIS website. Copies of claims of rights made available for publication and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this OASIS Committee Specification or OASIS Standard, can be obtained from the OASIS TC Administrator. OASIS makes no representation that any information or list of intellectual property rights will at any time be complete, or that any claims in such list are, in fact, Essential Claims.

The name "OASIS" is a trademark of OASIS, the owner and developer of this specification, and should be used only to refer to the organization and its official outputs. OASIS welcomes reference to, and implementation and use of, specifications, while reserving the right to enforce its marks against misleading uses. Please see <http://www.oasis-open.org/policies-guidelines/trademark> for above guidance.

Contents

1	References	4
2	Mapping JMS Types to AMQP	5
3	Mapping AMQP Types to Java	6
4	Messages	7
4.1	Message Structure	7
4.2	Mapping JMS Messages To AMQP	7
4.2.1	JMS Headers	8
4.2.2	JMS-defined 'JMSX' Properties	13
4.2.3	JMS Properties	14
4.2.4	Message Body Types	15
4.3	Mapping AMQP Messages To Java	18
4.3.1	Header Section	18
4.3.2	Properties Section	19
4.3.3	Application Properties Section	21
4.3.4	Delivery Annotations Section	22
4.3.5	Message Annotations Section	22
4.3.6	Footer Section	22
4.3.7	Body Sections	22
5	JMS Vendor Properties	24
6	Destinations	25
7	Message Producers	26
7.1	Sending Messages	26
8	Delivery Count Handling	27
9	Supplementary Definitions	28

1 References

TODO (presentation): move refs to wherever they are meant to go, ensure they are structured correctly, etc.

[AMQPMSGFORMAT]

AMQP Message Format <http://docs.oasis-open.org/amqp/core/v1.0/os/amqp-core-messaging-v1.0-os.html#section-message-format>

[UNICODE63]

The Unicode Consortium. The Unicode Standard, Version 6.3.0, (Mountain View, CA: The Unicode Consortium, 2013. ISBN 978-1-936213-08-5)

<http://www.unicode.org/versions/Unicode6.3.0/>

2 Mapping JMS Types to AMQP

TODO (content): define mapping from JMS types to AMQP types.

3 Mapping AMQP Types to Java

TODO (content): define mapping from AMQP types to Java types.

4 Messages

4.1 Message Structure

Both JMS and AMQP define Message structure in terms of “Header”, “Properties” and the message “Body”. Unfortunately the definitions of these terms are not consistent. For JMS the Headers refer to a defined set of attributes which are a mix of “immutable” and “mutable” (i.e. some which are invariant over the lifetime of the message, and some which are updated as the message travels from sender to eventual receiver). In contrast JMS Properties are (mostly) application defined message attributes set by the sender and invariant over the message lifetime from sender to receiver. A number of JMS-defined ‘JMSX’ Properties also exist which live in the same namespace as the application properties.

The AMQP Message is defined as a sequence of “Sections” [AMQPMSGFORMAT].

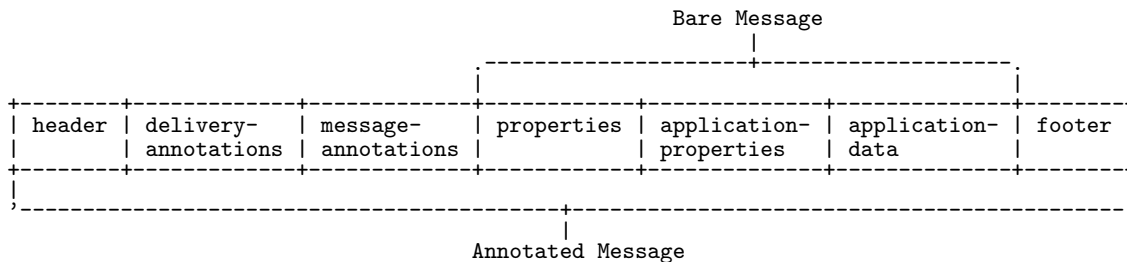


Figure 4.1: AMQP Message Structure

The AMQP header section defines a set of attributes which apply to the message (or rather this particular transfer of the message). These attributes are “mutable” throughout the passage of the message through the AMQP network. The properties section defines “immutable” properties of the message.

4.2 Mapping JMS Messages To AMQP

In overview we can say that a JMS Message has the following logical layout:




Figure 4.2: JMS Message

In overview we can say that a JMS Message maps to an AMQP message as follows: The JMS Headers and some JMS-defined ‘JMSX’ Properties will be stored within the header and properties sections, with occasional aid of additional message-annotations. JMS Properties set by applications will be stored in the application-properties section, including some JMS-defined ‘JMSX’ Properties. If no such properties are set, the application-properties section MAY be omitted. The Message body will be stored in application-data section(s) with type dependent on the particular JMS Message type in use.

TODO (content): do we enable setting (and thus describe here) delivery-annotations or footer details?

4.2.1 JMS Headers

The following section describes how each of the defined JMS Headers can be mapped to an AMQP Message.

Header Name	Description
JMSMessageID	<p>The JMSMessageID is defined as a Java String identifier for the Message which is set by the implementation during publication. AMQP uses the <code>message-id</code> field of <code>properties</code> for the same purpose, which is defined as being of type providing <i>message-id</i>, that is <code>message-id-ulong</code>, <code>message-id-uuid</code>, <code>message-id-binary</code> Or <code>message-id-string</code>.</p> <p>Sending JMS clients SHOULD use the <code>message-id-string</code> type for the <code>message-id</code> field of <code>properties</code> by default.</p> <p>JMSMessageID String values are REQUIRED to have a prefix of <i>"ID:"</i>. A single instance of this prefix MUST be removed from the value prior to setting the <code>message-id</code> field of <code>properties</code> on producing JMS clients, and MUST be added by receiving JMS clients (i.e. this prefix MUST be synthesized by the client library).</p> <p>See 4.2.1.1 JMSMessageID And JMSCorrelationID Handling for REQUIRED detail relating to supporting usage of the various AMQP types possible for the <code>message-id</code> field of <code>properties</code>.</p>
JMSTimestamp	<p>The JMSTimestamp header is defined as a Java long representing the time at which the message was handed off to the provider to send, in milliseconds since the Unix Epoch. That is, the value is set at the originating client and not changed thereafter. AMQP uses the <code>creation-time</code> field of <code>properties</code> for the same purpose.</p>

<p>JMSCorrelationID</p>	<p>The JMSCorrelationID header is defined as a Java String or byte [] used to link one message with another.</p> <p>AMQP uses the correlation-id field of properties for the same purpose, which is defined as being of type providing <i>message-id</i>, that is message-id-ulong, message-id-uuid, message-id-binary or message-id-string.</p> <p>To signal to receiving JMS clients in an interoperable way that the correlation-id field of properties represents an application-specific String and not a JMSMessageID String, a boolean message annotation with symbol key of “<i>x-opt-app-correlation-id</i>” is used. When setting JMSCorrelationID to a JMSMessageID (i.e. a String with prefix “<i>ID:</i>”), the annotation MUST be omitted or set to <i>false</i>. When setting JMSCorrelationID to an application-specific String value, the annotation MUST be set to <i>true</i>.</p> <p>JMSMessageID String values are required to have a prefix of “<i>ID:</i>”. When using these as the value for JMSCorrelationID, a single instance of this prefix MUST be removed before using the remainder to set the correlation-id field of properties in the producing JMS client and MUST be added by receiving JMS clients (i.e. this prefix MUST be synthesized by the client library).</p> <p>See 4.2.1.1 JMSMessageID And JMSCorrelationID Handling for REQUIRED detail relating to supporting usage of the various AMQP types possible for the correlation-id field of properties. Application-specific JMSCorrelationID values MUST be sent using the message-id-string type.</p>
<p>JMSReplyTo</p>	<p>The JMSReplyTo header is equivalent to the reply-to field of properties.</p> <p>JMSReplyTo is defined as being of the JMS Destination type, while the reply-to field of properties requires an address-string. See 6. Destinations for REQUIRED detail as to how conversion between these types is achieved.</p>

<p>JMSDestination</p>	<p>The JMSDestination header is equivalent to the <code>to</code> field of <code>properties</code>.</p> <p>Note that producers MUST set the <code>to</code> field of <code>properties</code> explicitly (intermediaries cannot derive it from address of the target of the link on which the message was sent).</p> <p>JMSDestination is defined as being of the JMS Destination type, while the <code>to</code> field of <code>properties</code> requires an <code>address-string</code>. See 6. Destinations for REQUIRED detail as to how conversion between these types is be achieved.</p>
<p>JMSDeliveryMode</p>	<p>The JMSDeliveryMode header is defined as a Java <code>int</code> with two possible values: <code>NON_PERSISTENT</code> and <code>PERSISTENT</code>.</p> <p>The JMSDeliveryMode header relates to two different aspects of sending a JMS Message as an AMQP message. Firstly, its value is equivalent to the <code>durable</code> field of header. For <code>PERSISTENT</code> messages, the <code>durable</code> field of header MUST be set to <code>true</code>. For <code>NON_PERSISTENT</code> messages, the <code>durable</code> field of header MUST be either set to <code>false</code> or omitted.</p> <p>Additionally, the JMSDeliveryMode value relates to the reliability guarantees of the AMQP message transfer, specifically the point at which sent messages are considered settled. For <code>PERSISTENT</code> messages the sender MUST NOT consider the message settled until the point that the sender has received notification of the disposition at the receiver. For <code>NON_PERSISTENT</code> messages on a non-transacted session an implementer MAY choose to send messages considering them settled as soon as they are sent (i.e. with the <code>settled</code> flag set to <code>true</code> on their original transfer).</p>
<p>JMSRedelivered</p>	<p>This header is set by the client provider on receipt of the message, based on handling of the <code>delivery-count</code> field of header.</p> <p>See 8. Delivery Count Handling for more details on handling of the <code>delivery-count</code> value.</p>

JMSType	<p>The JMSType field has no equivalent in AMQP. It is a Java String identifier defined with respect to a notional message definition repository in which message type definitions are contained. This definition would perhaps map closest to the descriptor used on a message whose body consisted of a single instance of an AMQP described type, however as such AMQP types carry their own descriptor it does not need to appear in the message headers.</p> <p>In order to carry the JMSType value on a message in an interoperable way, a message annotation with symbol key of “<i>x-opt-jms-type</i>” MUST be used, containing a string representing the JMSType value. If JMSType is not set, the annotation MUST be omitted.</p>
JMSExpiration	<p>The JMSExpiration header is defined as a Java long representing the time at which the message expires, in milliseconds since the Unix Epoch. A value for JMSExpiration is set by the provider when sending the message. That is, the value is set at the originating client and not changed thereafter.</p> <p>If a non-zero <i>time-to-live</i> value is specified when sending the message, JMSExpiration contains the computed expiry time. If no <i>time-to-live</i> value (or a value of zero) is supplied when sending the message, then JMSExpiration has the value zero.</p> <p>AMQP uses the <i>absolute-expiry-time</i> field of <i>properties</i> for the purpose of setting an expiration time. When a non-zero value <i>time-to-live</i> is supplied, the computed expiration time MUST be set in the <i>absolute-expiry-time</i> field of <i>properties</i>. When no <i>time-to-live</i> value (or a value of zero) is supplied and JMSExpiration thus has the value zero, the <i>absolute-expiry-time</i> field of <i>properties</i> MUST be omitted rather than set to zero.</p> <p>See 7.1 Sending Messages for additional REQUIRED detail relating to message expiration.</p>
JMSPriority	<p>The JMSPriority is equivalent to the <i>priority</i> field of header. JMSPriority is specified as being a Java int despite the valid values only being 0-9. AMQP allows the priority to be any valid ubyte value.</p> <p>When messages are being sent with a priority of DEFAULT_PRIORITY, the <i>priority</i> field of header SHOULD be omitted.</p>

<p>JMSDeliveryTime</p> <p>*New in JMS 2.0</p>	<p>The JMSDeliveryTime header has no equivalent in AMQP. It is defined as a Java long representing the earliest time at which the message it to be made available for delivery to a consumer, in milliseconds since the Unix Epoch. The value is set at the producing client by adding any provided <i>delivery delay</i> value to the time at which the message is sent.</p> <p>In order to carry the JMSDeliveryTime value on a message in an interoperable way, a message annotation with symbol key of “<i>x-opt-delivery-time</i>” and type timestamp MUST be used if a non-zero <i>delivery delay</i> is specified. If no delivery-delay is specified then the annotation SHOULD be omitted, and receiving JMS clients MUST then synthesize the value via use of the JMSTimestamp header instead.</p> <p style="background-color: orange; border-radius: 10px; padding: 2px; display: inline-block;">TODO (): define filter to enforce this on the broker?</p> <p style="background-color: orange; border-radius: 10px; padding: 2px; display: inline-block;">TODO (): define connection-capability for feature?</p>
---	--

4.2.1.1 JMSMessageID And JMSCorrelationID Handling

As indicated in 4.2.1 JMS Headers and 4.3.2 Properties Section, AMQP allows for messages to use a variety of types for the *message-id* and *correlation-id* fields of the *properties* section, specifically *message-id-ulong*, *message-id-uuid*, *message-id-binary* or *message-id-string*. JMS utilises the String type for both JMSMessageID and JMSCorrelationID. Due to this difference in possible types, it is necessary to support controlling and preserving the type information for the underlying fields of the AMQP message when setting and accessing the JMSMessageID and JMSCorrelationID headers of the JMS Message, both for basic interoperability and because it is common to retrieve a message id and then use it as a correlation id value.

To that end, implementing JMS clients MUST support the behaviour described herein for encoding/decoding all JMSMessageID values, and any JMSCorrelationID values which represent a JMSMessageID rather than an application-specific value, in order to influence values sent and received using the underlying *message-id* and *correlation-id* fields of the AMQP *properties* section.

After the client removes, or before it adds, the synthesized “ID.” prefix of such values, the following mapping is defined between the associated AMQP types and a String representation thereof:

AMQP type	String Representation
<i>message-id-binary</i>	“AMQP_BINARY:<hex representation of bytes>”
<i>message-id-uuid</i>	“AMQP_UUID:<string representation of uuid>”
<i>message-id-ulong</i>	“AMQP_ULONG:<string representation of ulong>”
<i>message-id-string</i>	“<original string>”
<i>message-id-string</i>	“AMQP_STRING:<original string>”

The AMQP_STRING encoding prefix exists only to escape *message-id-string* values that represent a JMSMessageID (for either JMSMessageID or JMSCorrelationID) and would happen to continue with one of the encoding prefixes above (including AMQP_STRING itself). It MUST NOT be used otherwise by the client library.

For the AMQP_BINARY encoding prefix, the client MUST return upper-case hex characters when the *getJMSMessageId* and *getJMSCorrelationID* methods of *Message* are used, but MUST accept both upper-case and lower-case values via the *setJMSMessageID(String id)* and *setJMSCorrelationID(String id)* methods.

When *JMSCorrelationID* is set using the *setJMSCorrelationID(String id)* method, any value that begins with the "ID:" prefix of a *JMSMessageID* and attempts to identify itself as an encoded *message-id-binary*, *message-id-uuid*, or *message-id-ulong* but which can't be converted into the indicated format MUST cause an appropriate *JMSException* to be thrown. For example, "ID:AMQP_ULONG:foo" can't be converted to a *message-id-ulong* and so MUST cause an exception.

If implemented, the *getJMSCorrelationIDAsBytes()* method of the *Message* MUST throw an exception if the type of the *correlation-id* field of properties is not *message-id-binary*.

The following table provides examples of various attempts to set *JMSCorrelationID*, and the associated output including whether the "x-opt-app-correlation-id" is set true to indicate an application-specific value. The mapping for the *getJMSCorrelationID* method is essentially the reverse of this process.

Method call	AMQP type	AMQP value	Annotation
<i>setJMSCorrelationID</i> ("ID:foo")	<i>message-id-string</i>	"foo"	X
<i>setJMSCorrelationID</i> ("ID:42")	<i>message-id-string</i>	"42"	X
<i>setJMSCorrelationID</i> ("ID:AMQP_STRING:AMQP_ULONG:42")	<i>message-id-string</i>	"AMQP_ULONG:42"	X
<i>setJMSCorrelationID</i> ("ID:AMQP_STRING:AMQP_STRING:foo")	<i>message-id-string</i>	"AMQP_STRING:foo"	X
<i>setJMSCorrelationID</i> ("app-spec")	<i>message-id-string</i>	"app-spec"	true
<i>setJMSCorrelationID</i> ("AMQP_ULONG:42")	<i>message-id-string</i>	"AMQP_ULONG:42"	true
<i>setJMSCorrelationID</i> ("AMQP_ULONG:foo")	<i>message-id-string</i>	"AMQP_ULONG:foo"	true
<i>setJMSCorrelationID</i> ("ID:AMQP_ULONG:42")	<i>message-id-ulong</i>	42	X
<i>setJMSCorrelationID</i> ("ID:AMQP_UUID:" + <uuid>)	<i>message-id-uuid</i>	<uuid>	X
<i>setJMSCorrelationID</i> ("ID:AMQP_BINARY:0123ABCD")	<i>message-id-binary</i>	0x0123ABCD	X
<i>setJMSCorrelationIDAsBytes</i> (0x0123ABCD)	<i>message-id-binary</i>	0x0123ABCD	X

The behaviour for *setJMSCorrelationID* and *getJMSCorrelationID* methods is similar, with the key distinction that all *JMSMessageID* values are prefixed "ID:" and there are no corresponding 'AsBytes' alternative methods.

4.2.2 JMS-defined 'JMSX' Properties

The following section describes how each of the JMS-defined 'JMSX' Properties can be mapped to an AMQP Message.

Property Name	Description
---------------	-------------

JMSXUserID	<p>The JMSXUserID property is equivalent to the <code>user-id</code> field of <code>properties</code>. The JMSXUserID is specified as <code>String</code>, while the <code>user-id</code> field of <code>properties</code> is specified as type <code>binary</code>.</p> <p>To maintain end-to-end fidelity for this property, implementations SHOULD convert between AMQP <code>binary</code> and Java <code>String</code> by using the UTF-8 Unicode [UNICODE63] character encoding.</p>
JMSXAppID	<p>The JMSXAppID property is defined as a Java <code>String</code> representing the identity of the application sending the message. If this property is supported by the client library, it MUST be stored in the <code>application-properties</code> section of the AMQP message.</p>
JMSXDeliveryCount *Mandatory since JMS 2.0	<p>This property is set by the client provider on receipt of the message, based on handling of the <code>delivery-count</code> field of header.</p> <p>See 8. Delivery Count Handling for more details on handling of the <code>delivery-count</code> value.</p>
JMSXGroupID	<p>The JMSXGroupID property is equivalent to the <code>group-id</code> field of <code>properties</code>.</p>
JMSXGroupSeq	<p>The JMSXGroupSeq property is used for the equivalent purpose of the <code>group-sequence</code> field of <code>properties</code>.</p> <p>As JMSXGroupSeq is an <code>int</code> and the <code>group-sequence</code> field of <code>properties</code> is an <code>uint</code>, JMSXGroupSeq values in the range -2^{31} to -1 inclusive MUST be mapped to values in the range 2^{31} to $2^{32}-1$ inclusive for the <code>group-sequence</code> field of <code>properties</code>.</p>
JMSXProducerTXID	<p>No standard mapping is provided for JMSXProducerTXID nor is a relation of its semantics to AMQP provided.</p>
JMSXConsumerTXID	<p>No standard mapping is provided for JMSXConsumerTXID nor is a relation of its semantics to AMQP provided. Should the semantics of this property be defined with respect to AMQP it would not affect the on-the-wire encoding as this property is defined to be set by the JMS on receipt of the message at the client.</p>
JMSXRcvTimestamp	<p>This value is (if supported) set by the client provider on receipt of the message, it is not transported on the wire and therefore does not need to be mapped to AMQP.</p>
JMSXState	<p>There is no direct mapping of the JMSXState property to AMQP. It is advised that implementers do not attempt to provide any sort of implementation of this property.</p>

4.2.3 JMS Properties

JMS Properties set by applications will be stored in the `application-properties` section, including some JMS-defined 'JMSX' Properties. If no such properties are set, the `application-properties` section MAY be omitted.

The JMS Specification defines a number of restrictions on the allowable keys and values for JMS Properties. A JMS property key is of type `String` and, in addition to other naming restrictions, are forbidden to be null or the empty `String`. Keys in the `application-properties` section **MUST** be of type `string`, thus precluding null values, but impose no other restriction. The value of a JMS property may only be of the types given in 2. Mapping JMS Types to AMQP

(excluding `char`, which is not allowed in this context). There are no such restrictions on the values within the `application-properties` section.

4.2.4 Message Body Types


JMS defines a number of standard Message body types. These different forms of body each need to be encoded in a defined manner such that Messages which are communicated from one provider to another may be reassembled into the correct message type with full fidelity. Moreover this definition allows for non-JMS producers to create messages of a form where their interpretation by a JMS client can be predicted.

Different Message body formats can be expressed through the use of different types of *application-data* sections within the encoded AMQP message, different values within those sections, and by using fields in the message *properties* section to indicate the nature of the body content.

4.2.4.1 BytesMessage

A `BytesMessage` is encoded using zero or more body sections of type `data`. When data sections are included, the `content-type` field of *properties* **SHOULD** contain the `symbol` value "*application/octet-stream*". The data section **MAY** be omitted when the content is zero-length, in which case the `content-type` field of *properties* **MUST** contain the `symbol` value "*application/octet-stream*".

The `getBodyLength()` method on `BytesMessage` **MUST** return the combined length of the data sections, or 0 if none are present.

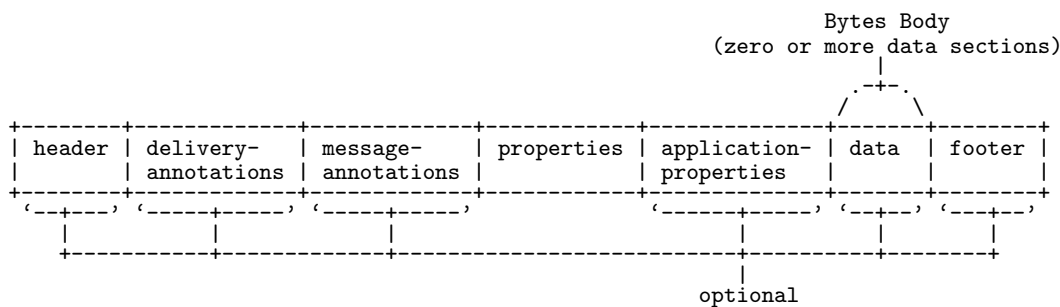


- `content-type` field of *properties* section **SHOULD** be "*application/octet-stream*" if data included.
- `content-type` field of *properties* section **MUST** be "*application/octet-stream*" if data is omitted.

Figure 4.3: AMQP Message Structure of a BytesMessage

TODO (intent): confirm we can omit the data section entirely?

4.2.4.2 TextMessage

A `TextMessage` is encoded as an `amqp-value` section containing a single encoded string or `null`. The `amqp-value` section **MAY** be omitted when the `TextMessage` body is `null`. If the `amqp-value` section is included, the `content-type` field of *properties* **SHOULD NOT** be set. If the `amqp-value` section is omitted, the `content-type` field of *properties* **MUST** contain the `symbol` value "*text/plain*".

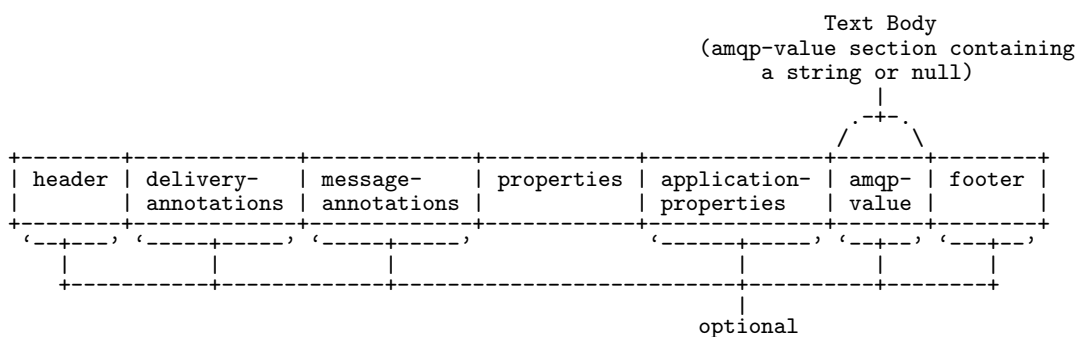

- amqp-value section SHOULD be present and contain a single encoded string or null.
- content-type field of properties section SHOULD NOT be set if amqp-value is included.
- content-type field of properties section MUST contain "text/plain" if amqp-value is omitted.

Figure 4.4: AMQP Message Structure of a TextMessage

TODO (intent): confirm we can omit the data section entirely?

TODO (intent): charset in content-type?

4.2.4.3 MapMessage

A MapMessage body is encoded as a single amqp-value section containing a single map value. As a result, the content-type field of properties SHOULD NOT be set.

Note that this restricts the MapMessage to having at most $2^{31} - 1$ entries, and at most $2^{32} - 1$ octets of encoded map content. Attempting to send a MapMessage which exceeds these limits MUST result in an appropriate JMSEException being thrown.

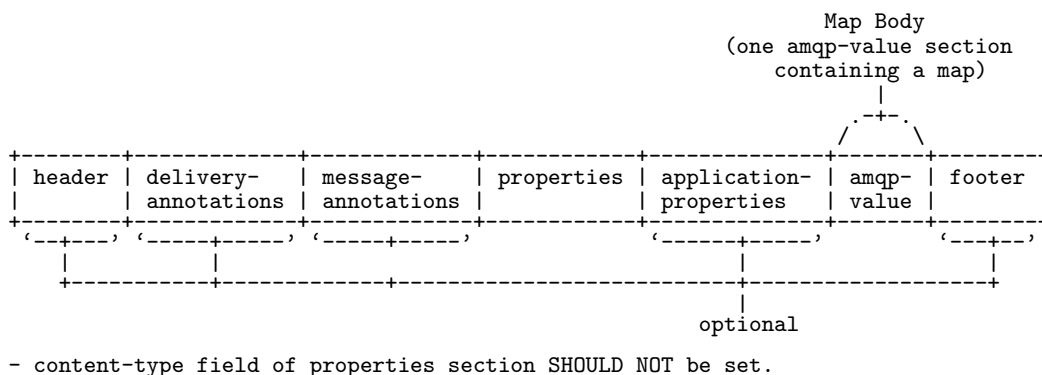


Figure 4.5: AMQP Message Structure of a MapMessage

The JMS Specification defines a number of restrictions on the allowable keys and values for MapMessage entries. A key is of type String and the values can be only of the types given in 2. Mapping JMS Types to AMQP . There are no such restrictions on the keys and values in an AMQP map value.

TODO (intent): sending non-JMS types?

4.2.4.4 StreamMessage

A `StreamMessage` body is encoded as a single `amqp-value` section containing a single `list`. As a result, the `content-type` field of `properties` SHOULD NOT be set.

Note that this restricts the `StreamMessage` to having at most $2^{32} - 1$ elements, and at most $2^{32} - 1$ octets of encoded `list` content. Attempting to send a `StreamMessage` which exceeds these limits MUST result in an appropriate `JMSEException` being thrown.

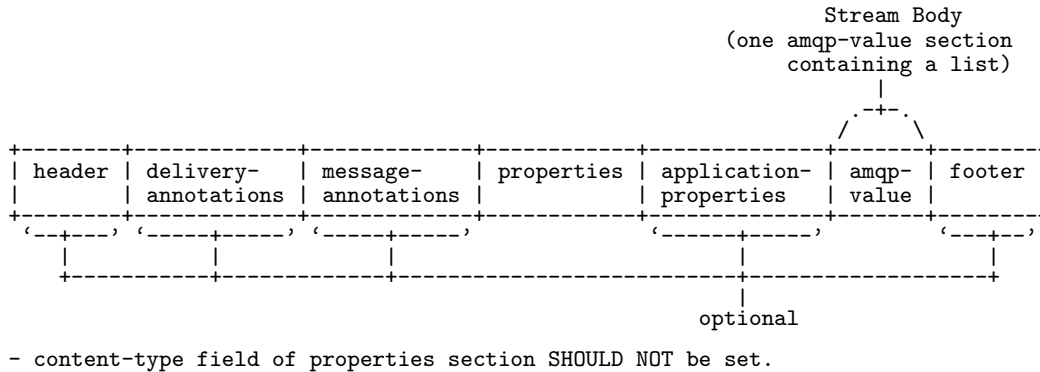


Figure 4.6: AMQP Message Structure of a `StreamMessage`

The JMS Specification restricts the allowable entry values for a `StreamMessage` entries to be only of the types given in 2. Mapping JMS Types to AMQP . There are no such restrictions on the entries in an AMQP `list` value.

TODO (intent): sending non-JMS types?

4.2.4.5 ObjectMessage

An `ObjectMessage` is encoded using zero or more body sections of type data, where the content is either (i) empty, or (ii) a single encoded AMQP binary value containing serialised object data. If multiple data sections are used, e.g. because the serialised object data exceeds the limits of a single binary value, each subsequent data section MUST contain a binary value holding a continuation of the serialised object content in the previous section. The data sections MAY be omitted when the `ObjectMessage` payload is empty or `null`. In all cases, the `content-type` field of `properties` MUST contain the symbol value "`application/x-java-serialized-object`".

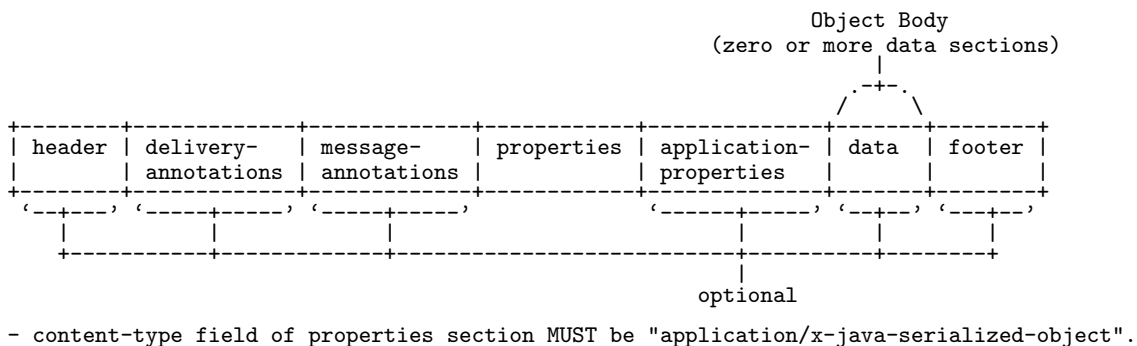


Figure 4.7: AMQP Message Structure of an `ObjectMessage`

TODO (intent): confirm we can omit the data section entirely?

TODO (intent): ability to represent objects (e.g maps) using the AMQP type encodings?

4.3 Mapping AMQP Messages To Java

The previous section defined how a Message as defined by the JMS specification is mapped into AMQP in order to achieve interoperability. In this section the mapping of both these and other arbitrary messages from an AMQP to JMS will be defined.

4.3.1 Header Section

Field Name	Description
durable	When receiving a message, the durable field of header MUST be taken to be equivalent to the JMSDeliveryMode header of the Message. If the durable field of header is set to <i>false</i> or isn't set then the JMSDeliveryMode MUST be taken to be NON_PERSISTENT. When the durable field of header is set to <i>true</i> the JMSDeliveryMode of the Message MUST be taken to be PERSISTENT.
priority	This field is equivalent to the JMSPriority header of the Message. JMSPriority is specified as being of type int despite the valid values only being 0-9. AMQP allows for the priority field of header to be any valid ubyte value. When receiving a message with the priority field of header greater than 9, the JMSPriority MUST be set to 9. If the priority field of header is unset then the JMSPriority MUST be taken to be DEFAULT_PRIORITY (i.e. the value 4).
ttl	<p>This field defines the number of milliseconds for which a given message is considered "live". There is no direct equivalent for the ttl field of header in the JMS specification.</p> <p>If and only if the absolute-expiry-time field of properties is not set, JMSExpiration SHOULD be based on the ttl field of header if set, by summing it with the current time in milliseconds since the Unix Epoch.</p>
first-acquirer	This field does not have a direct equivalent within the JMS specification, although JMSRedelivered is related, and so vendor property <i>JMS_AMQP_FIRST_ACQUIRER</i> SHOULD be used. For further details, see 5. JMS Vendor Properties .

delivery-count	<p>AMQP uses the <code>delivery-count</code> field of header to track previously failed delivery attempts for a message, with the first delivery attempt having a value of zero, and so on.</p> <p><code>JMSXDeliveryCount</code> is defined as a Java <code>int</code> count of delivery attempts, set by the provider on receive, where the first delivery attempt has value 1, the second has value 2 and so on.</p> <p>The value of <code>JMSXDeliveryCount</code> property is thus equal to <i>delivery-count + 1</i>.</p> <p>The <code>JMSRedelivered</code> header MUST be considered to be true if and only if the <code>delivery-count</code> field of header has a value greater than 0.</p> <p>See 8. Delivery Count Handling for more details on handling of this field.</p>
----------------	--

4.3.2 Properties Section

Field Name	Description
message-id	<p>This field is equivalent to the <code>JMSMessageID</code> header of the Message.</p> <p>The <code>JMSMessageID</code> value is a Java <code>String</code> whereas the <code>message-id</code> field of properties is defined as being of type providing <i>message-id</i>, that is <code>message-id-ulong</code>, <code>message-id-uuid</code>, <code>message-id-binary</code> or <code>message-id-string</code>.</p> <p>The JMS client library MUST prefix “<i>ID:</i>” to the value of the <code>message-id</code> field of properties before returning it as the <code>JMSMessageID</code> value.</p> <p>See 4.2.1.1 <code>JMSMessageID</code> And <code>JMSCorrelationID</code> Handling for REQUIRED detail relating to supporting usage of the various AMQP types possible for the <code>message-id</code> field of properties.</p>
user-id	<p>This field is equivalent to the <code>JMSXUserID</code> header.</p> <p><code>JMSXUserID</code> is specified as being of type <code>String</code>, while the <code>user-id</code> field of properties field is specified as type <code>binary</code>. To maintain end-to-end fidelity for this property implementations SHOULD convert between AMQP <code>binary</code> and Java <code>String</code> by using the UTF-8 Unicode [UNICODE63] character encoding.</p>

to	<p>This field is equivalent to the <code>JMSDestination</code> header.</p> <p><code>JMSDestination</code> is defined as being of the <code>JMS Destination</code> type, while the <code>to</code> field of properties requires an <code>address-string</code>. See 6. Destinations for REQUIRED detail regarding how conversion between these types is achieved if the <code>to</code> field of properties was set.</p> <p>If the <code>to</code> field of properties was not set on a received message, the <code>JMSDestination</code> header value SHOULD be derived from the <code>Destination</code> to which the receiving consumer was established.</p>
subject	<p>This field does not have an equivalent within the JMS specification, and so the vendor property <code>JMS_AMQP_SUBJECT</code> SHOULD be used. For further details, see 5. JMS Vendor Properties .</p>
reply-to	<p>This field is equivalent to the <code>JMSReplyTo</code> header.</p> <p><code>JMSReplyTo</code> is defined as being of the <code>JMS Destination</code> type, while the <code>reply-to</code> field of properties requires an <code>address-string</code>. See 6. Destinations for REQUIRED detail regarding how conversion between these types is achieved if the <code>reply-to</code> field of properties was set.</p>
correlation-id	<p>This field is equivalent to the <code>JMSCorrelationID</code> header of the <code>Message</code>.</p> <p>The <code>JMSCorrelationID</code> value is a Java String whereas the <code>correlation-id</code> field of properties is defined as being of type providing <code>message-id</code>, that is <code>message-id-ulong</code>, <code>message-id-uuid</code>, <code>message-id-binary</code> Or <code>message-id-string</code>.</p> <p>Where the <code>correlation-id</code> field of properties for the received message is of type <code>message-id-string</code> and the boolean message annotation with symbol key of "<code>x-opt-app-correlation-id</code>" is either not set or is false, then the <code>correlation-id</code> field of properties MUST be formatted as a <code>JMSMessageID</code>, that is the client library MUST prefix "<code>ID.</code>" to the value before returning it as the <code>JMSCorrelationID</code> value.</p> <p>See 4.2.1.1 <code>JMSMessageID</code> And <code>JMSCorrelationID</code> Handling for REQUIRED detail relating to supporting usage of the various AMQP types possible for the <code>correlation-id</code> field of properties.</p>
content-type	<p>This field does not have an equivalent within the JMS specification, and so the vendor property <code>JMS_AMQP_CONTENT_TYPE</code> SHOULD be used. For further details, see 5. JMS Vendor Properties .</p>

content-encoding	This field does not have an equivalent within the JMS specification, and so the vendor property <i>JMS_AMQP_CONTENT_ENCODING</i> SHOULD be used. For further details, see 5. JMS Vendor Properties .
absolute-expiry-time	This field is equivalent to the JMSExpiration message header. If the absolute-expiry-time field of properties is set, then JMSExpiration MUST have the equivalent Java long value, representing the time at which the message expires, in milliseconds since the Unix Epoch. If the absolute-expiry-time field of properties is not set then JMSExpiration SHOULD be based on the ttl field of header if set, see 4.3.1 Header Section for more details.
creation-time	This field is equivalent to the JMSTimestamp message header. If the creation-time field of properties is not set, then JMSTimestamp MUST have the value zero. If the creation-time field of properties field is set, then JMSTimestamp MUST have the equivalent Java long value, representing the time at which the message was sent/created, in milliseconds since the Unix Epoch.
group-id	This field is equivalent to the JMS-defined JMSXGroupID message property.
group-sequence	This field is used for the equivalent purpose of the JMSXGroupSeq message property. As the group-sequence field of properties is an uint and JMSXGroupSeq is an int, <i>group-sequence</i> values in the range 2^{31} to $2^{32}-1$ inclusive MUST be mapped to JMSXGroupSeq values in the range -2^{31} to -1 inclusive.
reply-to-group-id	This field does not have an equivalent within the JMS specification, and so the vendor property <i>JMS_AMQP_REPLY_TO_GROUP_ID</i> MUST be used. For For further details, see 5. JMS Vendor Properties .

4.3.3 Application Properties Section

The application-properties section contents are equivalent to the JMS Message *Properties*.

TODO (intent): how to handle receiving (and sending?) the following:

- String property names which do not conform with the JMS restrictions on naming
- property values with types not defined in the JMS specification

4.3.4 Delivery Annotations Section

TODO (content):

4.3.5 Message Annotations Section

TODO (content):

4.3.6 Footer Section

TODO (content):

4.3.7 Body Sections

The type and content of the message body received will influence the particular JMS Message type used to represent the AMQP message.

4.3.7.1 No Body

Where no body sections are received and the `content-type` field of `properties` is either not set, or set to the `symbol` value `"application/octet-stream"` the message SHOULD be interpreted as a `BytesMessage` with *zero-length* content.

Where no body sections are received and the `content-type` field of `properties` is set to the `symbol` value `"application/x-java-serialized-object"` the message SHOULD be interpreted as an `ObjectMessage` with *null* content.

Where no body sections are received and the `content-type` field of `properties` is set to the `symbol` value `"text/plain"` the message SHOULD be interpreted as a `TextMessage` with *null* content.

TODO (intent): charset in content-type?

TODO (intent): confirm we can omit the body section entirely?

4.3.7.2 Data

Where one or more data sections are received and the `content-type` field of `properties` is either not set, or set to the `symbol` value `"application/octet-stream"` the message SHOULD be interpreted as a `BytesMessage`.

Where one or more data sections are received and the `content-type` field of `properties` is set to the `symbol` value `"application/x-java-serialized-object"` the message SHOULD be interpreted as an `ObjectMessage`.

Where one data section is received and the `content-type` field of `properties` is set to the `symbol` value `"text/plain"`, the message SHOULD be interpreted as a `TextMessage`. Where the data section is empty, then the return value from the `getText()` method MUST be a Java `String` of length 0.

TODO (intent): Should we cover other specific content types, e.g XML/JSON/Other?

TODO (intent): charset in content-type?

4.3.7.3 Amqp-value

Where an `amqp-value` body section is received that contains a `string` value, the message SHOULD be interpreted as a `TextMessage`.

Where an `amqp-value` body section is received that contains a `null` value, the message SHOULD be interpreted as a `TextMessage` with null content.

Where an `amqp-value` body section is received that contains a `map` value, the message SHOULD be interpreted as a `MapMessage`.

Where an `amqp-value` body section is received that contains a `list` value, the message SHOULD be interpreted as a `StreamMessage`.

Where an `amqp-value` body section is received that contains a `binary` value, the message SHOULD be interpreted as a `BytesMessage`.

4.3.7.4 Todo

TODO (intent): how to handle receiving the following:

- Any other typical alternative representations of the JMS message types
- multiple body sections which were not described previously (i.e not data)
- bodies containing non-JMS types

TODO (content): discuss scope for receiving AMQP encoded types as a particular variety of `Message` or body type (e.g receive a map as a `java.util.Map` via an `ObjectMessage`, rather than receiving a `MapMessage`). The new JMS 2.0 `getBody()` method both eases and complicates this.

5 JMS Vendor Properties

This document defines the following JMS Vendor Properties.

Property Name	Set By	Description
JMS_AMQP_TTL	Application	<p>Optionally used for controlling the value of the <code>ttl</code> field of <code>header</code> for the outgoing AMQP message independently from the value normally used due to the JMS <i>Time To Live</i> value applied when sending the message. If set, it MUST be a <code>long</code> property with a value in the range zero to $2^{32} - 1$. If the property value is zero then the <code>ttl</code> field of <code>header</code> MUST be omitted rather than set to zero.</p> <p>When setting the <code>ttl</code> field of <code>header</code> by using the JMS_AMQP_TTL property, an entry with this key MUST NOT be included in the application-properties section of the transmitted AMQP message.</p>
JMS_AMQP_FIRST_ACQUIRER	Provider on Receive	Optionally used for accessing the <code>first-acquirer</code> field of <code>header</code> . If set, it MUST be of type <code>boolean</code> .
JMS_AMQP_SUBJECT	Application/ Provider on Receive	Optionally used for setting and/or accessing the <code>subject</code> field of <code>properties</code> . If set, it MUST be of type <code>String</code> .
JMS_AMQP_CONTENT_TYPE	Application/ Provider on Receive	Optionally used for setting and/or accessing the <code>content-type</code> field of <code>properties</code> to distinguish the content type within the message body where necessary. If set, it MUST be of type <code>String</code> .
JMS_AMQP_CONTENT_ENCODING	Application/ Provider on Receive	Optionally used for setting and/or accessing the <code>content-encoding</code> field of <code>properties</code> to distinguish the content encoding within the message body where necessary. If set, it MUST be of type <code>String</code> .
JMS_AMQP_REPLY_TO_GROUP_ID	Application/ Provider on Receive	Optionally used for setting and/or accessing the <code>reply-to-group-id</code> field of <code>properties</code> . If set, it MUST be of type <code>String</code> .

Each implementation MAY, in addition, define its own extension properties but these MUST NOT use AMQP as the “vendor” name, i.e. the additional extension property names MUST NOT begin with “JMS_AMQP”.

TODO (presentation): Decide where this goes, it isn't necessarily a section.

6 Destinations

In order to faithfully re-construct the `Destination` objects used in the `JMSDestination` and `JMSReplyTo` headers of a `Message` following its transmission via AMQP, information regarding the particular type of `Destination` object also has to be transmitted in an interoperable fashion.

This type information is transferred via message annotations with `symbol` keys of “*x-opt-to-type*” and “*x-opt-reply-type*”. The value of these annotation is of type `string` containing a comma-separated *set* of destination type attributes. Possible attributes include “*queue*”, “*topic*”, and “*temporary*”. These are used to define the following possible annotation values:

Destination Type	Annotation value
Queue	“queue”
TemporaryQueue	“queue,temporary”
Topic	“topic”
TemporaryTopic	“topic,temporary”

Producing JMS clients SHOULD set the “*x-opt-to-type*” message annotation on each message sent. Producing JMS clients SHOULD set the “*x-opt-reply-type*” message annotation on each message sent that has a `JMSReplyTo` header value.

When receiving an AMQP message that lacks the message annotations outlined above, additional steps are necessary in order to ensure that the `JMSDestination` and/or `JMSReplyTo` headers can be populated appropriately. If the “*x-opt-to-type*” and/or “*x-opt-reply-type*” message annotations are not present, the `JMSDestination` and/or `JMSReplyTo` values respectively SHOULD be constructed using the same `Destination` type derivative as that used to create the consumer which received the message.

When receiving an AMQP message that lacks the `to` field of `properties`, receiving JMS clients SHOULD synthesize this by returning the `Destination` value supplied when creating the consumer which received the message.

TODO (intent): Change the annotations to use a `ubyte` for efficiency?

TODO (intent): Define that `x-opt-reply-type = x-opt-to-type` unless both are set, so allowing that only one be set?

TODO (presentation): Decide where this goes, it isn't necessarily a section.

7 Message Producers

7.1 Sending Messages

JMS producers (e.g `MessageProducer`) are required to set various headers on a message during the sending operation.

For the `JMSExpiration` header, specific handling was discussed in 4.2.1 JMS Headers. However, beyond setting the `JMSExpiration` header with the computed expiration, producing JMS clients need additionally ensure an appropriate value for the `ttl` field of `header` on outgoing messages.

If the `JMS_AMQP_TTL` vendor property outlined in 5. JMS Vendor Properties has been set on the `Message`, its value SHOULD be used to populate the `ttl` field of `header`.

If the `JMS_AMQP_TTL` vendor property has not been set and a *Time To Live* value of 0 is applicable when sending a `Message`, then producing JMS clients MUST NOT set the `ttl` field of `header`, that is it MUST be omitted rather than set to zero.

If the `JMS_AMQP_TTL` vendor property has not been set, and a non-zero *Time To Live* value of $2^{32}-1$ or less is applicable when sending a `Message`, the `ttl` field of `header` MUST be set accordingly by the provider on the AMQP message. If the applicable *Time To Live* value exceeds $2^{32} - 1$ then the `ttl` field of `header` MUST be omitted instead rather than populated with a value less than specified by the application.

8 Delivery Count Handling

TODO (intent): define handling for delivery-count and its relationship to JMSXDeliveryCount and JMSRedelivered. That is, when to update it based on rollback, recover etc (and how this further depends on the way those methods are actually implemented, i.e locally or by pushing them back to the source). Decide where this goes, it isn't necessarily a section.

9 Supplementary Definitions

Annotation Name	Reference
x-opt-app-correlation-id	For further details, see 4.2.1 JMS Headers and 4.3.2 Properties Section
x-opt-jms-type	For further details, see 4.2.1 JMS Headers
x-opt-delivery-time	For further details, see 4.2.1 JMS Headers
x-opt-to-type	For further details, see 6. Destinations
x-opt-reply-type	For further details, see 6. Destinations

TODO (content): add annotations to registry, back-reference these definitions.

TODO (presentation): Decide where this goes, it isn't necessarily a section.