



# Extensible Resource Identifier (XRI) Resolution Version 2.0

## Working Draft 12

18 February 2008

### Specification URIs:

#### This Version:

<http://docs.oasis-open.org/xri/2.0/specs/cd02/xri-resolution-V2.0-wd-12.html>  
<http://docs.oasis-open.org/xri/2.0/specs/cd02/xri-resolution-V2.0-wd-12.pdf>  
<http://docs.oasis-open.org/xri/2.0/specs/cd02/xri-resolution-V2.0-wd-12.doc>

#### Previous Version:

<http://docs.oasis-open.org/xri/2.0/specs/cd02/xri-resolution-V2.0-cd-02.html>  
<http://docs.oasis-open.org/xri/2.0/specs/cd02/xri-resolution-V2.0-cd-02.pdf>  
<http://docs.oasis-open.org/xri/2.0/specs/cd02/xri-resolution-V2.0-cd-02.doc>

#### Latest Version:

<http://docs.oasis-open.org/xri/2.0/specs/xri-resolution-V2.0.html>  
<http://docs.oasis-open.org/xri/2.0/specs/xri-resolution-V2.0.pdf>  
<http://docs.oasis-open.org/xri/2.0/specs/xri-resolution-V2.0.doc>

#### Technical Committee:

OASIS eXtensible Resource Identifier (XRI) TC

#### Chairs:

Gabe Wachob, AmSoft <[gabe.wachob@amsoft.net](mailto:gabe.wachob@amsoft.net)>  
Drummond Reed, Cordance <[drummond.reed@cordance.net](mailto:drummond.reed@cordance.net)>

#### Editors:

Gabe Wachob, AmSoft <[gabe.wachob@amsoft.net](mailto:gabe.wachob@amsoft.net)>  
Drummond Reed, Cordance <[drummond.reed@cordance.net](mailto:drummond.reed@cordance.net)>  
Les Chasen, NeuStar <[les.chasen@neustar.biz](mailto:les.chasen@neustar.biz)>  
William Tan, NeuStar <[william.tan@neustar.biz](mailto:william.tan@neustar.biz)>  
Steve Churchill, XDI.org <[steven.churchill@xdi.org](mailto:steven.churchill@xdi.org)>

#### Related Work:

This specification replaces or supercedes:

- Extensible Resource Identifier (XRI) Resolution Version 2.0, Committee Draft 01, March 2005
- Extensible Resource Identifier (XRI) Version 1.0, Committee Draft 01, January 2004

This specification is related to:

- Extensible Resource Identifier (XRI) Syntax Version 2.0, Committee Specification, December 2005
- Extensible Resource Identifier (XRI) Metadata Version 2.0, Committee Draft 01, March 2005

#### Declared XML Namespace(s)

xri://\$res

xri://\$xrds  
xri://\$xrd  
xri://\$xrd\*(\$v\*2.0)  
xri://\$res\*auth  
xri://\$res\*auth\*(\$v\*2.0)  
xri://\$res\*proxy  
xri://\$res\*proxy\*(\$v\*2.0)

**Abstract:**

This document defines a simple generic format for resource description (XRDS documents), a protocol for obtaining XRDS documents from HTTP(S) URIs, and generic and trusted protocols for resolving Extensible Resource Identifiers (XRI) using XRDS documents and HTTP(S) URIs. These protocols are intended for use with both HTTP(S) URIs as defined in [RFC2616] and with XRI as defined by *Extensible Resource Identifier (XRI) Syntax Version 2.0* [XRISyntax] or higher. For a dictionary of XRI defined to provide standardized identifier metadata, see *Extensible Resource Identifier (XRI) Metadata Version 2.0* [XRIMetadata]. For a basic introduction to XRI, see the *XRI 2.0 FAQ* [XRIFAQ].

**Status:**

This document was last revised or approved by the XRI Technical Committee on the above date. The level of approval is also listed above. Check the “Latest Version” or “Latest Approved Version” location noted above for possible later revisions of this document.

Technical Committee members should send comments on this specification to the Technical Committee’s email list. Others should send comments to the Technical Committee by using the “Send A Comment” button on the Technical Committee’s web page at <http://www.oasis-open.org/committees/xri>.

For information on whether any patents have been disclosed that may be essential to implementing this specification, and any offers of patent licensing terms, please refer to the Intellectual Property Rights section of the Technical Committee web page (<http://www.oasis-open.org/committees/xri/ipr.php>).

The non-normative errata page for this specification is located at <http://www.oasis-open.org/committees/xri>.

---

## Notices

Copyright © OASIS® 1993–2008. All Rights Reserved.

All capitalized terms in the following text have the meanings assigned to them in the OASIS Intellectual Property Rights Policy (the "OASIS IPR Policy"). The full Policy may be found at the OASIS website.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published, and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this section are included on all such copies and derivative works. However, this document itself may not be modified in any way, including by removing the copyright notice or references to OASIS, except as needed for the purpose of developing any document or deliverable produced by an OASIS Technical Committee (in which case the rules applicable to copyrights, as set forth in the OASIS IPR Policy, must be followed) or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by OASIS or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and OASIS DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY OWNERSHIP RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

OASIS requests that any OASIS Party or any other party that believes it has patent claims that would necessarily be infringed by implementations of this OASIS Committee Specification or OASIS Standard, to notify OASIS TC Administrator and provide an indication of its willingness to grant patent licenses to such patent claims in a manner consistent with the IPR Mode of the OASIS Technical Committee that produced this specification.

OASIS invites any party to contact the OASIS TC Administrator if it is aware of a claim of ownership of any patent claims that would necessarily be infringed by implementations of this specification by a patent holder that is not willing to provide a license to such patent claims in a manner consistent with the IPR Mode of the OASIS Technical Committee that produced this specification. OASIS may include such claims on its website, but disclaims any obligation to do so.

OASIS takes no position regarding the validity or scope of any intellectual property or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; neither does it represent that it has made any effort to identify any such rights. Information on OASIS' procedures with respect to rights in any document or deliverable produced by an OASIS Technical Committee can be found on the OASIS website. Copies of claims of rights made available for publication and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this OASIS Committee Specification or OASIS Standard, can be obtained from the OASIS TC Administrator. OASIS makes no representation that any information or list of intellectual property rights will at any time be complete, or that any claims in such list are, in fact, Essential Claims.

The names "OASIS", "Extensible Resource Identifier", and "XRI" are trademarks of OASIS, the owner and developer of this specification, and should be used only to refer to the organization and its official outputs. OASIS welcomes reference to, and implementation and use of, specifications, while reserving the right to enforce its marks against misleading uses. Please see <http://www.oasis-open.org/who/trademark.php> for above guidance.

---

# Table of Contents

1	Introduction .....	11
1.1	Overview of XRI Resolution Architecture .....	11
1.2	Structure of this Specification .....	14
1.3	Terminology and Notation .....	15
1.4	Examples .....	15
1.5	Normative References .....	15
1.6	Non-Normative References .....	16
2	Conformance .....	17
2.1	Conformance Targets .....	17
2.2	Conformance Claims .....	17
2.3	XRDS Clients .....	17
2.4	XRDS Servers .....	17
2.5	XRI Local Resolvers .....	18
2.5.1	Generic .....	18
2.5.2	HTTPS .....	18
2.5.3	SAML .....	18
2.6	XRI Proxy Resolvers .....	18
2.6.1	Generic .....	18
2.6.2	HTTPS .....	18
2.6.3	SAML .....	18
2.7	XRI Authority Servers .....	19
2.7.1	Generic .....	19
2.7.2	HTTPS .....	19
2.7.3	SAML .....	19
2.8	Extensions .....	19
2.9	Language .....	19
3	Namespaces .....	20
3.1	XRI Namespaces for XRI Resolution .....	20
3.1.1	XRIs Reserved for XRI Resolution .....	20
3.1.2	XRIs Assigned to XRI Resolution Service Types .....	20
3.2	XML Namespaces for XRI Resolution .....	21
3.3	Media Types for XRI Resolution .....	21
4	XRDS Documents .....	23
4.1	XRDS and XRD Namespaces and Schema Locations .....	23
4.2	XRD Elements and Attributes .....	23
4.2.1	Management Elements .....	25
4.2.2	Trust Elements .....	26
4.2.3	Synonym Elements .....	27
4.2.4	Service Endpoint Descriptor Elements .....	27
4.2.5	Service Endpoint Trust Elements .....	29
4.2.6	Service Endpoint Selection Elements .....	29
4.3	XRD Attribute Processing Rules .....	30

4.3.1 ID Attribute .....	30
4.3.2 Version Attribute .....	30
4.3.3 Priority Attribute .....	30
4.4 XRI and IRI Encoding Requirements.....	31
5 XRD Synonym Elements .....	32
5.1 Query Identifiers .....	32
5.1.1 HTTP(S) URI Query Identifiers.....	32
5.1.2 XRI Query Identifiers.....	32
5.2 Synonym Elements .....	33
5.2.1 LocalID.....	33
5.2.2 EquivID .....	33
5.2.3 CanonicalID .....	34
5.2.4 CanonicalEquivID .....	34
5.3 Redirect and Ref Elements .....	35
5.4 XRD Equivalence .....	35
5.5 Synonym Verification.....	36
5.6 Synonym Selection .....	36
6 Discovering an XRDS Document from an HTTP(S) URI.....	37
6.1 Overview .....	37
6.2 HEAD Protocol.....	37
6.3 GET Protocol.....	37
7 XRI Resolution Flow .....	39
8 Inputs and Outputs.....	41
8.1 Inputs .....	41
8.1.1 QXRI (Authority String, Path String, and Query String) .....	43
8.1.2 Resolution Output Format .....	43
8.1.3 Service Type.....	44
8.1.4 Service Media Type .....	45
8.2 Outputs .....	45
8.2.1 XRDS Document.....	47
8.2.2 XRD Element .....	47
8.2.3 URI List.....	48
8.2.4 HTTP(S) Redirect .....	48
9 Generic Authority Resolution Service.....	49
9.1 XRI Authority Resolution .....	49
9.1.1 Service Type and Service Media Type.....	49
9.1.2 Protocol.....	50
9.1.3 Requesting an XRDS Document using HTTP(S) .....	52
9.1.4 Failover Handling.....	53
9.1.5 Community Root Authorities .....	54
9.1.6 Self-Describing XRDS Documents.....	54
9.1.7 Qualified Subsegments .....	55
9.1.8 Cross-References .....	56
9.1.9 Selection of the Next Authority Resolution Service Endpoint .....	56
9.1.10 Construction of the Next Authority URI.....	56

9.1.11	Recurring Authority Resolution .....	57
9.2	IRI Authority Resolution.....	57
9.2.1	Service Type and Media Type .....	57
9.2.2	Protocol.....	58
9.2.3	Optional Use of HTTPS.....	58
10	Trusted Authority Resolution Service .....	59
10.1	HTTPS .....	59
10.1.1	Service Type and Service Media Type .....	59
10.1.2	Protocol.....	59
10.2	SAML .....	59
10.2.1	Service Type and Service Media Type .....	60
10.2.2	Protocol.....	60
10.2.3	Recurring Authority Resolution .....	61
10.2.4	Client Validation of XRDS.....	62
10.2.5	Correlation of ProviderID and KeyInfo Elements .....	63
10.3	HTTPS+SAML .....	63
10.3.1	Service Type and Service Media Type.....	63
10.3.2	Protocol.....	64
11	Proxy Resolution Service .....	65
11.1	Service Type and Media Types .....	65
11.2	HXRIs.....	65
11.3	HXRI Query Parameters .....	66
11.4	HXRI Encoding/Decoding Rules.....	67
11.5	HTTP(S) Accept Headers.....	69
11.6	Null Resolution Output Format .....	69
11.7	Outputs and HTTP(S) Redirects.....	69
11.8	Differences Between Proxy Resolution Servers .....	70
11.9	Combining Authority and Proxy Resolution Servers .....	70
12	Redirect and Ref Processing .....	71
12.1	Cardinality .....	73
12.2	Precedence .....	73
12.3	Redirect Processing .....	74
12.4	Ref Processing.....	75
12.5	Nested XRDS Documents .....	76
12.5.1	Redirect Examples .....	76
12.5.2	Ref Examples.....	79
12.6	Recursion and Backtracking.....	82
13	Service Endpoint Selection .....	83
13.1	Processing Rules .....	83
13.2	Service Endpoint Selection Logic .....	85
13.3	Selection Element Matching Rules.....	86
13.3.1	Selection Element Match Options .....	86
13.3.2	The Match Attribute.....	86
13.3.3	Absent Selection Element Matching Rule .....	87
13.3.4	Empty Selection Element Matching Rule .....	87

13.3.5 Multiple Selection Element Matching Rule .....	87
13.3.6 Type Element Matching Rules .....	87
13.3.7 Path Element Matching Rules .....	88
13.3.8 MediaType Element Matching Rules .....	90
13.4 Service Endpoint Matching Rules .....	90
13.4.1 Service Endpoint Match Options .....	90
13.4.2 Select Attribute Match Rule .....	90
13.4.3 All Positive Match Rule .....	90
13.4.4 Default Match Rule .....	90
13.5 Service Endpoint Selection Rules .....	91
13.5.1 Positive Match Rule .....	91
13.5.2 Default Match Rule .....	91
13.6 Pseudocode .....	91
13.7 Construction of Service Endpoint URIs .....	93
13.7.1 The append Attribute .....	93
13.7.2 The uric Parameter .....	94
14 Synonym Verification .....	95
14.1 Redirect Verification .....	95
14.2 EquivID Verification .....	95
14.3 CanonicalID Verification .....	96
14.3.1 HTTP(S) URI Verification Rules .....	97
14.3.2 XRI Verification Rules .....	97
14.3.3 CanonicalEquivID Verification .....	97
14.3.4 Verification Status Attributes .....	98
14.3.5 Examples .....	99
15 Status Codes and Error Processing .....	104
15.1 Status Elements .....	104
15.2 Status Codes .....	104
15.3 Status Context Strings .....	107
15.4 Returning Errors in Plain Text or HTML .....	107
15.5 Error Handling in Recursing and Proxy Resolution .....	107
16 Use of HTTP(S) .....	108
16.1 HTTP Errors .....	108
16.2 HTTP Headers .....	108
16.2.1 Caching .....	108
16.2.2 Location .....	108
16.2.3 Content-Type .....	108
16.3 Other HTTP Features .....	108
16.4 Caching and Efficiency .....	109
16.4.1 Resolver Caching .....	109
16.4.2 Synonyms .....	109
17 Extensibility and Versioning .....	110
17.1 Extensibility .....	110
17.1.1 Extensibility of XRDS .....	110
17.1.2 Other Points of Extensibility .....	112

17.2	Versioning .....	112
17.2.1	Version Numbering .....	112
17.2.2	Versioning of the XRI Resolution Specification .....	112
17.2.3	Versioning of Protocols .....	113
17.2.4	Versioning of XRDs.....	113
18	Security and Data Protection .....	114
18.1	DNS Spoofing or Poisoning.....	114
18.2	HTTP Security.....	114
18.3	SAML Considerations.....	114
18.4	Limitations of Trusted Resolution .....	114
18.5	Synonym Verification.....	115
18.6	Redirect and Ref Management.....	115
18.7	Community Root Authorities.....	115
18.8	Caching Authorities .....	115
18.9	Recurring and Proxy Resolution .....	115
18.10	Denial-Of-Service Attacks .....	115
A.	Acknowledgments.....	116
B.	RelaxNG Schema for XRDS and XRD.....	117
C.	XML Schema for XRDS and XRD .....	120
D.	Media Type Definition for application/xrds+xml.....	124
E.	Media Type Definition for application/xrd+xml.....	125
F.	Example Local Resolver Interface Definition.....	126
G.	Revision History.....	130



---

## Table of Figures

Figure 1: Four typical scenarios for XRI authority resolution.....	12
Figure 2: Top-level flowchart of XRI resolution phases.....	39
Figure 3: Input processing flowchart.....	42
Figure 4: Output processing flowchart.....	46
Figure 5: Authority resolution flowchart.....	50
Figure 6: XRDS request flowchart.....	52
Figure 7: Redirect and Ref processing flowchart.....	72
Figure 8: Service endpoint (SEP) selection flowchart.....	83
Figure 9: Service endpoint (SEP) selection logic flowchart.....	85

---

## Table of Tables

Table 1: Comparing DNS and XRI resolution architecture.....	11
Table 2: XRIs reserved for XRI resolution. ....	20
Table 3: XRIs assigned to identify XRI resolution service types. ....	20
Table 4: XML namespace prefixes used in this specification.....	21
Table 5: Media types defined or used in this specification. ....	21
Table 6: Parameters for the media types defined in Table 5.....	22
Table 7: The four XRD synonym elements. ....	32
Table 8: Input parameters for XRI resolution. ....	41
Table 9: Subparameters of the QXRI input parameter.....	43
Table 10: Outputs of XRI resolution.....	45
Table 11: Service Type and Service Media Type values for generic authority resolution. ....	49
Table 12: Parsing the first subsegment of an XRI that begins with a global context symbol.....	55
Table 13: Parsing the first subsegment of an XRI that begins with a cross-reference. ....	55
Table 14: Examples of the Next Authority URIs constructed using different types of cross-references. ...	56
Table 15: Service Type and Service Media Type values for HTTPS trusted authority resolution.....	59
Table 16: Service Type and Service Media Type values for SAML trusted authority resolution.....	60
Table 17: Service Type and Service Media Type values for HTTPS+SAML trusted authority resolution..	63
Table 18: Service Type and Service Media Type values for proxy resolution. ....	65
Table 19: Binding of logical XRI resolution parameters to QXRI query parameters.....	66
Table 20: Example of HXRI components prior to transformation to URI-normal form. ....	68
Table 21: Example of HXRI components after transformation to URI-normal form.....	68
Table 22: Example of HXRI components after application of the required encoding rules.....	68
Table 23: Comparison of Redirect and Ref elements. ....	71
Table 24: Match options for selection elements.....	86
Table 25: Enumerated values of the global match attribute and corresponding matching rules.....	86
Table 26: Examples of applying the Path element matching rules.....	89
Table 27: Match options for service endpoints. ....	90
Table 28: Values of the <code>append</code> attribute and the corresponding QXRI component to append.....	93
Table 29: Error codes for XRI resolution.....	106

# 1 Introduction

Extensible Resource Identifier (XRI) provides a uniform syntax for abstract structured identifiers as defined in [XRISyntax]. Because XRIs may be used across a wide variety of communities and applications (as Web addresses, database keys, filenames, object IDs, XML IDs, tags, etc.), no single resolution mechanism may prove appropriate for all XRIs. However, in the interest of promoting interoperability, this specification defines a simple generic resource description format called XRDS (Extensible Resource Descriptor Sequence), a standard protocol for requesting XRDS documents using HTTP(S) URIs, and standard protocol for resolving XRIs using XRDS documents and HTTP(S) URIs. Both generic and trusted versions of the XRI resolution protocol are defined (the latter using HTTPS [RFC2818] and/or signed SAML assertions [SAML]). In addition, an HTTP(S) proxy resolution service is specified both to provide network-based resolution services and for backwards compatibility with existing HTTP(S) infrastructure.

## 1.1 Overview of XRI Resolution Architecture

Resolution is the function of dereferencing an identifier to a set of metadata describing the identified resource. For example, in DNS, a domain name is typically resolved using the UDP protocol into a set of resource records describing a host. If the resolver does not have the answer cached, it will start by querying one of the well-known DNS root nameservers for the fully qualified domain name. Since domain names work from right to left, and the root nameservers know only about top level domains, they will return the NS (name server) records for the top-level domain. The resolver will then repeat the same query to those name servers and “walk down the tree” until the domain name is fully resolved or an error is encountered.


A simple *non-recursing resolver* will rely on a *recursing nameserver* to do this work. For example, it will send a query for the fully qualified domain name `docs.oasis-open.org` to a local nameserver. If the nameserver doesn't have the answer cached, it will resolve the domain name and return the results back to the resolver (and cache the results for subsequent queries).

XRI resolution follows this same architecture except at a higher level of abstraction, i.e., rather than using UDP to resolve a domain name into a text-based resource descriptor, it uses HTTP(S) to resolve an XRI into an XML-based resource descriptor called an *XRDS document*. Table 1 provides a high-level comparison between DNS and XRI resolution architectures.

Resolution Component	DNS Architecture	XRI Architecture
Identifier	domain name	XRI (authority + path + query)
Resource record format	text (resource record)	XML (XRDS document)
Attribute identifier	string	anyURI
Network endpoint identifier	IP address	URI
Synonyms	CNAME	LocalID, EquivID, CanonicalID, CanonicalEquivID
Primary resolution protocol	UDP	HTTP(S)
Trusted resolution options	DNSSEC	HTTPS and/or SAML
Resolution client	resolver	resolver
Resolution server	authoritative nameserver	authority server
Recursing resolution	recursing nameserver	recursing authority server or proxy resolver

Table 1: Comparing DNS and XRI resolution architecture.

31 As Table 1 notes, XRI resolution architecture supports both recursing authority servers and *proxy*  
 32 *resolvers*. A proxy resolver is simply an HTTP(S) interface to a local XRI resolver (one  
 33 implemented using a platform-specific API). Proxy resolvers enable applications—even those that  
 34 only understand HTTP URIs—to easily access the functions of an XRI resolver remotely.  
 35 Figure 1 shows four scenarios of how these components might interact to resolve  
 36 `xri://(tel:+1-201-555-0123)*foo*bar` (unlike DNS, this works from left-to-right).

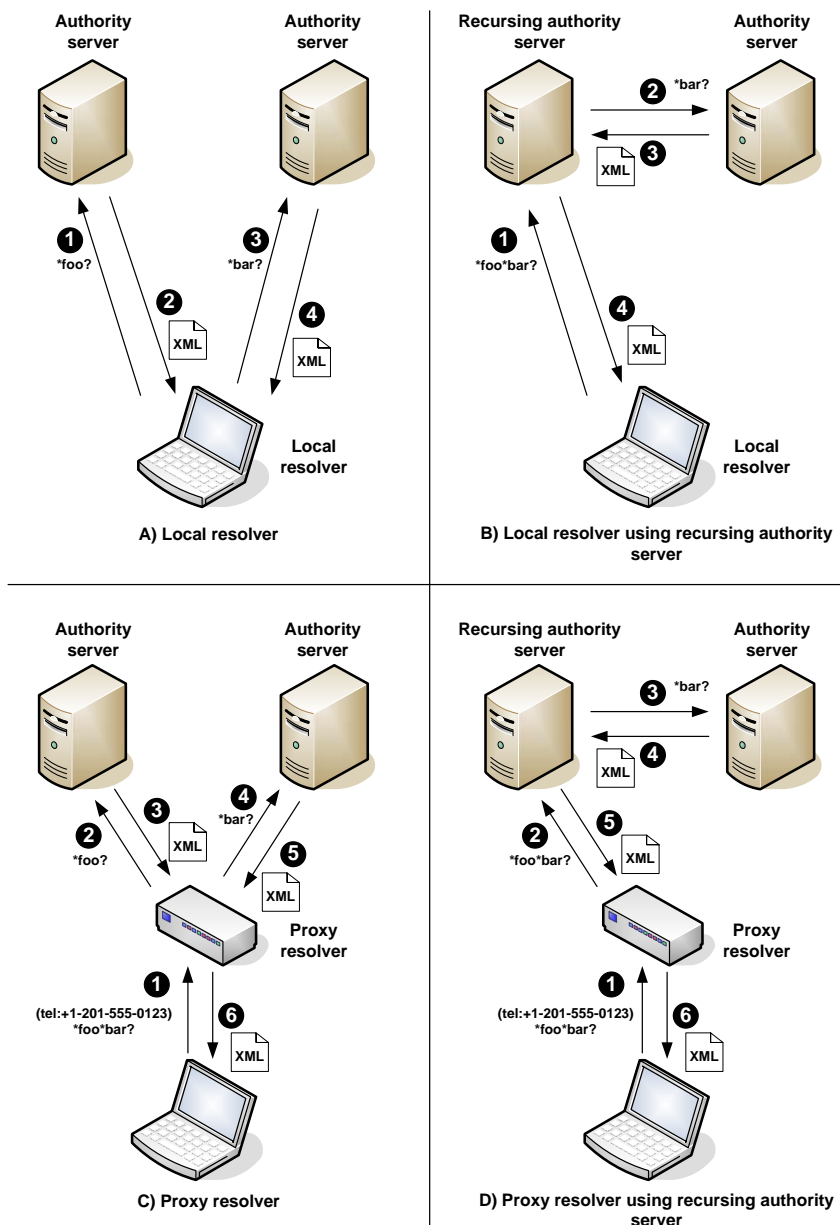

37  
 38 *Figure 1: Four typical scenarios for XRI authority resolution.*

39 Each of these scenarios may involve two phases of XRI resolution:

- 40 • *Phase 1: Authority resolution.* This is the phase required to resolve the authority component  
41 of an XRI into an XRDS document describing the target authority. Authority resolution works  
42 iteratively from left-to-right across each subsegment in the authority component of the XRI. In  
43 XRIs, subsegments are delimited using either a specified set of symbol characters or  
44 parentheses. For example, in the XRI `xri://(tel:+1-201-555-0123)*foo*bar`, the  
45 authority subsegments are `(tel:+1-201-555-0123)` (the community root authority, in this  
46 case a URI expressed as an cross-reference delimited with parentheses), `*foo`, (the first  
47 resolvable subsegment), and `*bar`, (the second resolvable subsegment). Note that a  
48 resolver must be preconfigured (or have its own way of discovering) the community root  
49 authority starting point, so the community root subsegment is not resolved except in one  
50 special case (see section 9.1.6).
- 51 • *Phase 2: Optional service endpoint selection.* Once authority resolution is complete, there is  
52 an optional second phase of XRI resolution to select a specific type of metadata from the final  
53 XRDS document retrieved called a *service endpoint* (SEP). Service endpoints are descriptors  
54 of concrete URIs at which network services are available for the target resource. Additional  
55 XRI resolution parameters as well as the path component of an XRI may be used as service  
56 endpoint selection criteria.

57 It is worth highlighting several other key differences between DNS and XRI resolution:

- 58 • *HTTP.* As a resolution protocol, HTTP not only makes it easy to deploy XRI resolution  
59 services (including proxy resolution services), but also allows them to employ both HTTP  
60 security standards (e.g., HTTPS) and XML-based security standards (e.g., SAML). Although  
61 less efficient than UDP, HTTP(S) is suitable for the higher level of abstraction represented by  
62 XRIs and can take advantage of the full caching capabilities of modern web infrastructure.
- 63 • *XRDS documents.* This simple, extensible XML resource description format makes it easy to  
64 describe the capabilities of any XRI-, IRI-, or URI-identified resource in a manner that can be  
65 consumed by any XML-aware application (or even by non-XRI aware browsers via a proxy  
66 resolver).
- 67 • *Service endpoint descriptors.* DNS can use NAPTR records to do string transformations into  
68 URIs representing network endpoints. XRDS documents have *service endpoint descriptors*—  
69 elements that describe the set of URIs at which a particular type of service is available. Each  
70 service endpoint may present a different type of data or metadata representing or describing  
71 the identified resource. Thus XRI resolution can serve as a lightweight, interoperable  
72 discovery mechanism for resource attributes available via HTTP(S), LDAP, UDDI, SAML,  
73 WS-Trust, or other directory or discovery protocols.
- 74 • *Synonyms.* DNS uses the CNAME attribute to establish equivalence between domain names.  
75 XRDS architecture supports four synonym elements (LocalID, EquivID, CanonicalID, and  
76 CanonicalEquivID) to provide robust support for mapping XRIs, IRIs, or URIs to other XRIs,  
77 IRIs, or URIs that identify the same target resource. This is particularly useful for discovering  
78 and mapping to persistent identifiers as often required by trust infrastructures.
- 79 • *Redirects and Refs.* XRDS architecture also includes two mechanisms for distributed XRDS  
80 document management. The *Redirect* element allows an identifier authority to manage  
81 multiple XRDS documents describing a target resource from different network locations. The  
82 *Ref* element allows one identifier authority to delegate all or part of an XRDS document to a  
83 different identifier authority.

## 84 1.2 Structure of this Specification

85 This specification is structured into the following sections:

- 86 • *Conformance* (section 2) specifies the conformance targets and conformance claims for this  
87 specification.
- 88 • *Namespaces* (section 3) specifies the XRI and XML namespaces and media types used for  
89 the XRI resolution protocol.

90 The next three sections cover XRDS documents and the requirements for XRDS clients and  
91 servers:

- 92 • *XRDS Documents* (section 4) specifies a simple, flexible XML-based container for XRI  
93 resolution metadata, service endpoints, and/or other metadata describing a resource.
- 94 • *XRDS Synonyms* (section 5) specifies usage of the four XRDS synonym elements.
- 95 • *Discovering an XRDS Document from an HTTP(S) URI* (section 6) specifies a protocol for  
96 obtaining an XRDS description of a resource by starting from an HTTP(S) URI identifying the  
97 resource.

98 The remaining sections cover XRI resolution and the requirements for XRI authority servers, local  
99 resolvers, and proxy resolvers:

- 100 • *XRI Resolution Flow* (section 7) provides a top-level flowchart of the XRI resolution function  
101 together with a list of other supporting flowcharts used throughout the specification.
- 102 • *Inputs and Outputs* (section 8) specifies the input parameters, output formats, and associated  
103 processing rules.
- 104 • *Generic Authority Resolution* (section 9) specifies a simple resolution protocol for the  
105 authority component of an XRI using HTTP/HTTPS as a transport.
- 106 • *Trusted Authority Resolution* (section 10) specifies three extensions to generic authority  
107 resolution for creating a chain of trust between the participating identifier authorities using  
108 HTTPS connections, SAML assertions, or both.
- 109 • *Proxy Resolution* (section 11) specifies an HTTP(S) interface for an XRI resolver plus a  
110 format for expressing an XRI as an HTTP(S) URI to provide backwards compatibility with  
111 existing HTTP(S) infrastructure.
- 112 • *Redirect and Ref Processing* (section 12) specifies how a resolver follows a reference from  
113 one XRDS document to another to enable federation of XRDS documents across multiple  
114 network locations (Redirects) or identifier authorities (Refs).
- 115 • *Service Endpoint Selection* (section 13) specifies an optional second phase of resolution for  
116 selecting a set of service endpoints from an XRDS document.
- 117 • *Synonym Verification* (section 14) specifies how a resolver can verify that one XRI, IRI, or  
118 HTTP(S) URI is an authorized synonym for another.
- 119 • *Status Codes and Error Processing* (section 15) specifies status reporting and error handling.
- 120 • *Use of HTTP(S)* (section 16) specifies how the XRDS and XRI resolution protocols leverage  
121 features of the HTTP(S) protocol.
- 122 • *Extensibility and Versioning* (section 17) describes how the XRI resolution protocol can be  
123 easily extended and how new versions will be identified and accommodated.
- 124 • *Security and Data Protection* (section 18) summarizes key security and privacy  
125 considerations for XRI resolution infrastructure.

## 126 1.3 Terminology and Notation

127 The key words “MUST”, “MUST NOT”, “REQUIRED”, “SHALL”, “SHALL NOT”, “SHOULD”,  
128 “SHOULD NOT”, “RECOMMENDED”, “NOT RECOMMENDED”, “MAY”, and “OPTIONAL” in this  
129 document are to be interpreted as described in [RFC2119]. When these words are not capitalized  
130 in this document, they are meant in their natural language sense.

131 This specification uses the Augmented Backus-Naur Form (ABNF) syntax notation defined in  
132 [RFC4234].

133 Other terms used in this document and not defined herein are defined in the glossary in Appendix  
134 C of [XRISyntax].

135 Formatting conventions used in this document:

136 Examples look like this.

137 ABNF productions look like this.

138 In running text, XML elements, attributes, and values look like this.

## 139 1.4 Examples

140 The specification includes short examples as necessary to clarify interpretation. However, to  
141 minimize non-normative material, it does not include extensive examples of XRI resolution  
142 requests and responses. Many such examples are available via open source implementations,  
143 operating XRI registry and resolution services, and public websites about XRI. For a list of such  
144 resources, see the Wikipedia page on XRI [WikipediaXRI].

## 145 1.5 Normative References

- 146 [DNSSEC] D. Eastlake, *Domain Name System Security Extensions*,  
147 <http://www.ietf.org/rfc/rfc2535>, IETF RFC 2535, March 1999.
- 148 [RFC2045] N. Borenstein, N. Freed, *Multipurpose Internet Mail Extensions (MIME)*  
149 *Part One: Format of Internet Message Bodies*,  
150 <http://www.ietf.org/rfc/rfc2045.txt>, IETF RFC 2045, November 1996.
- 151 [RFC2046] N. Borenstein, N. Freed, *Multipurpose Internet Mail Extensions (MIME)*  
152 *Part Two: Media Types*, <http://www.ietf.org/rfc/rfc2046.txt>, IETF RFC  
153 2046, November 1996.
- 154 [RFC2119] S. Bradner, *Key Words for Use in RFCs to Indicate Requirement Levels*,  
155 <http://www.ietf.org/rfc/rfc2119.txt>, IETF RFC 2119, March 1997.
- 156 [RFC2141] R. Moats, *URN Syntax*, <http://www.ietf.org/rfc/rfc2141.txt>, IETF RFC  
157 2141, May 1997.
- 158 [RFC2483] M. Mealling, R. Daniel Jr., *URI Resolution Services Necessary for URN*  
159 *Resolution*, <http://www.ietf.org/rfc/rfc2483.txt>, IETF RFC 2483, January  
160 1999.
- 161 [RFC2616] R. Fielding, J. Gettys, J. Mogul, H. Frystyk, L. Masinter, P. Leach, T.  
162 Berners-Lee, *Hypertext Transfer Protocol -- HTTP/1.1*,  
163 <http://www.ietf.org/rfc/rfc2616.txt>, IETF RFC 2616, June 1999.
- 164 [RFC2818] E. Rescorla, *HTTP over TLS*, <http://www.ietf.org/rfc/rfc2818.txt>, IETF  
165 RFC 2818, May 2000.
- 166 [RFC3023] M. Murata, S. St-Laurent, D. Kohn, *XML Media Types*,  
167 <http://www.ietf.org/rfc/rfc3023.txt>, IETF RFC 3023, January 2001.
- 168 [RFC3986] T. Berners-Lee, R. Fielding, L. Masinter, *Uniform Resource Identifier*  
169 *(URI): Generic Syntax*, <http://www.ietf.org/rfc/rfc3986.txt>, IETF RFC  
170 3986, January 2005.

171	<b>[RFC4234]</b>	D. H. Crocker and P. Overell, <i>Augmented BNF for Syntax Specifications: ABNF</i> , <a href="http://www.ietf.org/rfc/rfc4234.txt">http://www.ietf.org/rfc/rfc4234.txt</a> , IETF RFC 4234, October 2005.
172		
173	<b>[RFC4288]</b>	N. Freed, J. Klensin, <i>Media Type Specifications and Registration Procedures</i> , <a href="http://www.ietf.org/rfc/rfc4288.txt">http://www.ietf.org/rfc/rfc4288.txt</a> , IETF RFC 4288, December 2005.
174		
175		
176	<b>[SAML]</b>	S. Cantor, J. Kemp, R. Philpott, E. Maler, <i>Assertions and Protocols for the OASIS Security Assertion Markup Language (SAML) V2.0</i> , <a href="http://www.oasis-open.org/committees/security">http://www.oasis-open.org/committees/security</a> , March 2005.
177		
178		
179	<b>[Unicode]</b>	The Unicode Consortium. The Unicode Standard, Version 4.1.0, defined by: The Unicode Standard, Version 4.0 (Boston, MA, Addison-Wesley, 2003. ISBN 0-321-18578-1), as amended by Unicode 4.0.1 ( <a href="http://www.unicode.org/versions/Unicode4.0.1">http://www.unicode.org/versions/Unicode4.0.1</a> ) and by Unicode 4.1.0 ( <a href="http://www.unicode.org/versions/Unicode4.1.0">http://www.unicode.org/versions/Unicode4.1.0</a> ), March, 2005.
180		
181		
182		
183		
184	<b>[UUID]</b>	Open Systems Interconnection – <i>Remote Procedure Call</i> , ISO/IEC 11578:1996, <a href="http://www.iso.org/">http://www.iso.org/</a> , August 2001.
185		
186	<b>[XML]</b>	T. Bray, J. Paoli, C. Sperberg-McQueen, E. Maler, F. Yergeau, <i>Extensible Markup Language (XML) 1.0, Third Edition</i> , World Wide Web Consortium, <a href="http://www.w3.org/TR/REC-xml/">http://www.w3.org/TR/REC-xml/</a> , February 2004.
187		
188		
189	<b>[XMLDSig]</b>	D. Eastlake, J. Reagle, D. Solo et al., <i>XML-Signature Syntax and Processing</i> , World Wide Web Consortium, <a href="http://www.w3.org/TR/xmlsig-core/">http://www.w3.org/TR/xmlsig-core/</a> , February, 2002.
190		
191		
192	<b>[XMLID]</b>	J. Marsh, D. Veillard, N. Walsh, <i>xml:id Version 1.0</i> , World Wide Web Consortium, <a href="http://www.w3.org/TR/2005/REC-xml-id-20050909">http://www.w3.org/TR/2005/REC-xml-id-20050909</a> , September 2005.
193		
194		
195	<b>[XMLSchema]</b>	H. Thompson, D. Beech, M. Maloney, N. Mendelsohn, <i>XML Schema Part 1: Structures Second Edition</i> , World Wide Web Consortium, <a href="http://www.w3.org/TR/xmlschema-1/">http://www.w3.org/TR/xmlschema-1/</a> , October 2004.
196		
197		
198	<b>[XMLSchema2]</b>	P. Biron, A. Malhotra, <i>XML Schema Part 2: Datatypes Second Edition</i> , World Wide Web Consortium, <a href="http://www.w3.org/TR/xmlschema-2/">http://www.w3.org/TR/xmlschema-2/</a> , October 2004.
199		
200		
201	<b>[XRIMetadata]</b>	D. Reed, <i>Extensible Resource Identifier (XRI) Metadata V2.0</i> , <a href="http://docs.oasis-open.org/xri/xri/V2.0/xri-metadata-V2.0-cd-01.pdf">http://docs.oasis-open.org/xri/xri/V2.0/xri-metadata-V2.0-cd-01.pdf</a> , March 2005.
202		
203		
204	<b>[XRISyntax]</b>	D. Reed, D. McAlpin, <i>Extensible Resource Identifier (XRI) Syntax V2.0</i> , <a href="http://docs.oasis-open.org/xri/xri/V2.0/xri-syntax-V2.0-cd-01.pdf">http://docs.oasis-open.org/xri/xri/V2.0/xri-syntax-V2.0-cd-01.pdf</a> , March 2005.
205		
206		

## 207 1.6 Non-Normative References

208	<b>[XRIFAQ]</b>	OASIS XRI Technical Committee, <i>XRI 2.0 FAQ</i> , <a href="http://www.oasis-open.org/committees/xri/faq.php">http://www.oasis-open.org/committees/xri/faq.php</a> , Work-In-Progress, March 2006.
209		
210	<b>[XRIReqs]</b>	G. Wachob, D. Reed, M. Le Maitre, D. McAlpin, D. McPherson, <i>Extensible Resource Identifier (XRI) Requirements and Glossary v1.0</i> , <a href="http://www.oasis-open.org/apps/org/workgroup/xri/download.php/2523/xri-requirements-and-glossary-v1.0.doc">http://www.oasis-open.org/apps/org/workgroup/xri/download.php/2523/xri-requirements-and-glossary-v1.0.doc</a> , June 2003.
211		
212		
213		
214		
215	<b>[WikipediaXRI]</b>	Wikipedia entry on XRI (Extensible Resource Identifier), <a href="http://en.wikipedia.org/wiki/XRI">http://en.wikipedia.org/wiki/XRI</a> , Wikipedia Foundation.
216		
217	<b>[Yadis]</b>	J. Miller, <i>Yadis Specification Version 1.0</i> , <a href="http://yadis.org/">http://yadis.org/</a> , March 2006.



---

## 218 2 Conformance

219 This section specifies the conformance targets of this specification and the requirements that  
220 apply to each of them.

### 221 2.1 Conformance Targets

222 The conformance targets of this specification are:

- 223 1. *XRDS clients*, which provide a limited subset of the functionality of XRI resolvers.
- 224 2. *XRDS servers*, which provide a limited subset of the functionality of XRI authority servers.
- 225 3. *XRI local resolvers*, which may implement any combination of the generic, HTTPS, or  
226 SAML resolution protocols.
- 227 4. *XRI proxy resolvers*, which may implement any combination of the generic, HTTPS, or  
228 SAML resolution protocols.
- 229 5. *XRI authority servers*, which may implement any combination of the generic, HTTPS, or  
230 SAML resolution protocols.

231 Note that a single implementation may serve any combination of these functions. For example, an  
232 XRI authority server may also function as an XRDS client and server and an XRI local and proxy  
233 resolver.

### 234 2.2 Conformance Claims

235 A claim of conformance with this specification **MUST** meet the following requirements:

- 236 1. It **MUST** state which conformance targets it implements.
- 237 2. If the conformance target is an XRI local resolver, XRI proxy resolver, or XRI authority  
238 server, it **MUST** state which resolution protocols are supported, i.e., generic, HTTPS,  
239 and/or SAML.

### 240 2.3 XRDS Clients

241 An implementation conforms to this specification as an XRDS client if it meets the following  
242 conditions:

- 243 1. It **MAY** implement parsing of XRDS Documents as specified in section 4.
- 244 2. It **MUST** implement the client requirements of the XRDS request protocol specified in  
245 section 6.

### 246 2.4 XRDS Servers

247 An implementation conforms to this specification as an XRDS server if it meets the following  
248 conditions:

- 249 1. It **MUST** produce valid XRDS Documents as specified in section 4.
- 250 2. It **MUST** implement the server requirements of the XRDS request protocol specified in  
251 section 6.

## 252 **2.5 XRI Local Resolvers**

### 253 **2.5.1 Generic**

254 An implementation conforms to this specification as a generic local resolver if it meets the  
255 following conditions:

- 256 1. It parses XRDS documents as specified in section 4.
- 257 2. It processes resolution inputs and outputs as specified in section 8.
- 258 3. It implements the resolver requirements of the generic resolution protocol specified in  
259 section 9.
- 260 4. It implements the Redirect and Ref processing rules specified in section 12.
- 261 5. It implements the Service Endpoint Selection processing rules specified in section 13.
- 262 6. It implements the Synonym Verification processing rules specified in section 14.
- 263 7. It implements the Status Code and Error Processing rules specified in section 15.
- 264 8. It follows the HTTP(S) usage recommendations specified in section 16.

### 265 **2.5.2 HTTPS**

266 An implementation conforms to this specification as an HTTPS local resolver if it meets all the  
267 requirements of a generic local resolver plus the following conditions:

- 268 1. It implements the resolver requirements of the HTTPS trusted resolution protocol  
269 specified in section 10.1.

### 270 **2.5.3 SAML**

271 An implementation conforms to this specification as a SAML local resolver if it meets all the  
272 requirements of a generic local resolver plus the following conditions:

- 273 1. It implements the resolver requirements of the SAML trusted resolution protocol specified  
274 in section 10.2.
- 275 2. It SHOULD also meet the requirements of an HTTPS local resolver. This is STRONGLY  
276 RECOMMENDED for confidentiality of SAML interactions.

## 277 **2.6 XRI Proxy Resolvers**

### 278 **2.6.1 Generic**

279 An implementation conforms to this specification as a generic proxy resolver if it meets all the  
280 requirements of a generic local resolver plus the following conditions:

- 281 1. It implements the requirements for a proxy resolver specified in section 11.

### 282 **2.6.2 HTTPS**

283 An implementation conforms to this specification as a HTTPS proxy resolver if it meets all the  
284 requirements of a HTTPS local resolver plus the following conditions:

- 285 1. It implements the requirements for a HTTPS proxy resolver specified in section 11.

### 286 **2.6.3 SAML**

287 An implementation conforms to this specification as a SAML proxy resolver if it meets all the  
288 requirements of a SAML local resolver plus the following conditions:

- 289 1. It implements the requirements for a proxy resolver specified in section 11.

- 290 2. It SHOULD also meet the requirements of an HTTPS proxy resolver. This is STRONGLY  
291 RECOMMENDED for confidentiality of SAML interactions.

## 292 **2.7 XRI Authority Servers**

### 293 **2.7.1 Generic**

294 An implementation conforms to this specification as a generic authority server if it meets the  
295 following conditions:

- 296 1. It produces XRDS documents as specified in section 4.
- 297 2. It assigns XRDS synonyms as specified in section 5.
- 298 3. It processes resolution inputs and outputs as specified in section 8.
- 299 4. It implements the server requirements of the generic resolution protocol specified in  
300 section 9.
- 301 5. It implements the Status Code and Error Processing rules specified in section 15.
- 302 6. It follows the HTTP(S) usage recommendations specified in section 16.

### 303 **2.7.2 HTTPS**

304 An implementation conforms to this specification as an HTTPS authority server if it meets all the  
305 requirements of a generic authority server plus the following conditions:

- 306 1. It implements the server requirements of the HTTPS trusted resolution protocol specified  
307 in section 10.1.

### 308 **2.7.3 SAML**

309 An implementation conforms to this specification as an SAML authority server if it meets all the  
310 requirements of a generic authority server plus the following conditions:

- 311 1. It implements the server requirements of the SAML trusted resolution protocol specified  
312 in section 10.2.
- 313 2. It SHOULD also meet the requirements of an HTTPS authority server. This is  
314 STRONGLY RECOMMENDED for confidentiality of SAML interactions.

## 315 **2.8 Extensions**

316 The protocols and XML documents defined in this specification MAY be extended. To maintain  
317 interoperability, extensions MUST use the extensibility architecture specified in section 17.

318 Extensions MUST NOT be implemented in a manner that would cause them to be non-  
319 interoperable with implementations that do not implement the extensions.

## 320 **2.9 Language**

321 This specification's normative language is English. Translation into other languages is  
322 encouraged.

## 323 3 Namespaces

### 324 3.1 XRI Namespaces for XRI Resolution

325 As defined in section 2.2.1.2 of [XRISyntax], the GCS symbol \$ is reserved for specified  
326 identifiers, i.e., those assigned and defined by XRI TC specifications, other OASIS specifications,  
327 or other standards bodies. (See also [XRIMetadata].) This section specifies the \$ namespaces  
328 reserved for XRI resolution.

#### 329 3.1.1 XRIs Reserved for XRI Resolution

330 The XRIs in Table 2 are assigned by this specification for the purposes of XRI resolution and  
331 resource description.

XRI (in URI-Normal Form)	Usage	See Section
xri://\$res	Namespace for XRI resolution service types	3.1.2
xri://\$xrds	Namespace for the generic XRDS (Extensible Resource Descriptor Sequence) schema (not versioned)	3.2
xri://\$xrd	Namespace for the XRD (Extensible Resource Descriptor) schema (versioned)	3.2
xri://\$xrd*(\$v*2.0)	Version 2.0 of above (using an XRI version identifier as defined in [XRIMetadata])	3.2

332 Table 2: XRIs reserved for XRI resolution.

#### 333 3.1.2 XRIs Assigned to XRI Resolution Service Types

334 The XRIs in Table 3 are assigned to the XRI resolution service types defined in this specification.

XRI	Usage	See Section
xri://\$res*auth	Authority resolution service	9
xri://\$res*auth*(\$v*2.0)	Version 2.0 of above	9
xri://\$res*proxy	HTTP(S) proxy resolution service	11
xri://\$res*proxy*(\$v*2.0)	Version 2.0 of above	11

335 Table 3: XRIs assigned to identify XRI resolution service types.

336 Using the standard XRI extensibility mechanisms described in [XRISyntax], the \$res  
337 namespace may be extended by other authorities besides the XRI Technical Committee. See  
338 [XRIMetadata] for more information about extending \$ namespaces.

339 **3.2 XML Namespaces for XRI Resolution**

340 Throughout this document, the following XML namespace prefixes have the meanings defined in  
 341 Table 4 whether or not they are explicitly declared in the example or text.

Prefix	XML Namespace	Reference
xs	http://www.w3.org/2001/XMLSchema	[XMLSchema]
saml	urn:oasis:names:tc:SAML:2.0:assertion	[SAML]
ds	http://www.w3.org/2000/09/xmldsig#	[XMLDSig]
xrds	xri://\$xrds	Section 3.1.1 of this document
xrd	xri://\$xrd*(\$v*2.0)	Section 3.1.1 of this document

342 *Table 4: XML namespace prefixes used in this specification.*

343 **3.3 Media Types for XRI Resolution**

344 Because XRI resolution architecture is based on HTTP, it makes use of standard media types as  
 345 defined by [RFC2046], particularly in HTTP Accept headers as specified in [RFC2616]. Table 5  
 346 specifies the media types used for XRI resolution. Note that in XRI authority resolution, these  
 347 media types MUST be passed as HTTP Accept header values. By contrast, in XRI proxy  
 348 resolution these media types MUST be passed as query parameters in an HTTP(S) URI as  
 349 specified in section 11.

Media Type	Usage	Reference
application/xrds+xml	Content type for returning the full XRDS document describing a resolution chain	Appendix D
application/xrd+xml	Content type for returning only the final XRD element in a resolution chain	Appendix E
text/uri-list	Content type for returning a list of URIs output from the service endpoint selection process defined in section 12	Section 5 of [RFC2483]

350 *Table 5: Media types defined or used in this specification.*

351 To provide full control of XRI resolution, the media types specified in Table 5 accept the media  
 352 type parameters defined in Table 6. All are Boolean flags. Note that when these media type  
 353 parameters are appended to a media type in the XRI proxy resolver interface, the semicolon  
 354 character used to concatenate them MUST be percent-encoded as specified in section 11.4.

Media Type Parameter	Default Value	Usage	See Section
https	FALSE	Specifies use of HTTPS trusted resolution	10.1
saml	FALSE	Specifies use of SAML trusted resolution	10.2
refs	TRUE	Specifies whether Refs should be followed during resolution (by default they are followed)	12.4
sep	FALSE	Specifies whether service endpoint selection should be performed	13
nodefault_t	TRUE	Specifies whether a default match on a Type service endpoint selection element is allowed	13.3
nodefault_p	TRUE	Specifies whether a default match on a Path service endpoint selection element is allowed	13.3
nodefault_m	TRUE	Specifies whether a default match on a MediaType service endpoint selection element is allowed	13.3
uric	FALSE	Specifies whether a resolver should automatically construct service endpoint URIs	13.7.1
cid	TRUE	Specifies whether automatic canonical ID verification should be performed	14.3

356 Table 6: Parameters for the media types defined in Table 5.

357 When used as logical XRI resolution input parameters, these media type parameters will be  
 358 referred to as *subparameters*.

359

## 4 XRDS Documents

360  
361  
362  
363  
364

XRI resolution provides resource description metadata using a simple, extensible XML format called an XRDS (Extensible Resource Descriptor Sequence) document. An XRDS document contains one or more XRD (Extensible Resource Descriptor) elements. While this specification defines only the XRD elements necessary to support XRI resolution, XRD elements can easily be extended to publish any form of metadata about the resources they describe.

365

### 4.1 XRDS and XRD Namespaces and Schema Locations

366  
367  
368  
369  
370

An XRDS document is intended to serve exclusively as an XML container document for XML schemas from other XML namespaces. Therefore it has only a single root element `xrds:XRDS` in its own XML namespace identified by the XRI `xri://$xrds`. It also has two attributes, `redirect` and `ref`, that are used to identify the resource described by the XRDS document. Both are of type `anyURI`. Use of these attributes is defined in section 12.5.

371  
372  
373  
374  
375

The elements in the XRD schema are intended for generic resource description, including the metadata necessary for XRI resolution. Since the XRD schema has simple semantics that may evolve over time, the version defined in this specification uses the XML namespace `xri://$xrd*($v*2.0)`. This namespace is versioned using XRI version metadata as defined in [XRIMetadata].

376  
377

The attributes defined in both the XRDS and XRD schemas are not namespace qualified. In order to prevent conflicts, attributes defined in extensions MUST be namespace qualified.

378  
379  
380  
381

This namespace architecture enables the XRDS namespace to remain constant while allowing the XRD namespace (and the namespaces of other XML elements that may be included in an XRDS document) to be versioned over time. See section 17.2 for more about versioning of the XRD schema.

382  
383

The locations of the normative RelaxNG schema files for an XRDS document and an XRD element as defined by this specification are:

384  
385

- <http://docs.oasis-open.org/xri/2.0/specs/cd03/xrds.rnc>
- <http://docs.oasis-open.org/xri/2.0/specs/cd03/xrd.rnc>

Comment [DSR1]: New references per the change in 4.2.1.

386

The following URIs will always reference the latest versions of these files:

387  
388

- <http://docs.oasis-open.org/xri/2.0/specs/xrds.rnc>
- <http://docs.oasis-open.org/xri/2.0/specs/xrd.rnc>

389  
390

A reference listing of each of these files is provided in Appendix B, and a reference listing of the informative W3C XML Schema versions is provided in Appendix C.

391

### 4.2 XRD Elements and Attributes

392  
393  
394  
395

The following example XRDS instance document illustrates the elements and attributes defined in the XRD schema. Note that because it is provided by the community root authority (`tel:+1-201-555-0123`), it includes only one XRD describing the subsegment `*foo`. Examples in later sections show multiple XRDs.

```

397 <XRDS xmlns="xri://$xrd" ref="xri://(tel:+1-201-555-0123)*foo">
398   <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
399     <Query>*foo</Query>
400     <Status code="100"/>
401     <ServerStatus code="100"/>
402     <Expires>2005-05-30T09:30:10Z</Expires>
403     <ProviderID>xri://(tel:+1-201-555-0123)</ProviderID>
404     <LocalID>*baz</LocalID>
405     <EquivID>https://example.com/example/resource/</EquivID>
406     <CanonicalID>xri://(tel:+1-201-555-0123)!1234</CanonicalID>
407     <CanonicalEquivID>
408       xri://=!4a76!c2f7!9033.78bd
409     </CanonicalEquivID>
410     <Service>
411       <ProviderID>
412         xri://(tel:+1-201-555-0123)!1234
413       </ProviderID>
414       <Type>xri://$res*auth*($v*2.0)</Type>
415       <MediaType>application/xrds+xml</MediaType>
416       <URI priority="10">http://resolve.example.com</URI>
417       <URI priority="15">http://resolve2.example.com</URI>
418       <URI>https://resolve.example.com</URI>
419     </Service>
420     <Service>
421       <ProviderID>
422         xri://(tel:+1-201-555-0123)!1234
423       </ProviderID>
424       <Type>xri://$res*auth*($v*2.0)</Type>
425       <MediaType>application/xrds+xml;https=true</MediaType>
426       <URI>https://resolve.example.com</URI>
427     </Service>
428     <Service>
429       <Type match="null" />
430       <Path select="true">/media/pictures</Path>
431       <MediaType select="true">image/jpeg</MediaType>
432       <URI append="path" >http://pictures.example.com</URI>
433     </Service>
434     <Service>
435       <Type match="null" />
436       <Path select="true">/media/videos</Path>
437       <MediaType select="true">video/mpeg</MediaType>
438       <URI append="path" >http://videos.example.com</URI>
439     </Service>
440     <Service>
441       <ProviderID> xri://!1000!1234.5678</ProviderID>
442       <Type match="null" />
443       <Path match="default" />
444       <URI>http://example.com/local</URI>
445     </Service>
446     <Service>
447       <Type>http://example.com/some/service/v3.1</Type>
448       <URI>http://example.com/some/service/endpoint</URI>
449       <LocalID>https://example.com/example/resource/</LocalID>
450     </Service>
451   </XRD>
452 </XRDS>

```

453 A link to the normative RelaxNG schema definition of the XRD schema is provided in Appendix B.  
454 Additional normative requirements that cannot be captured in XML schema notation are specified  
455 in the following sections. In the case of any conflict, the normative text in this section shall prevail.



Comment [DSR2]: Throughout this and the following sections, all attribute definitions have been moved to bullet points following the element definition.

## 4.2.1 Management Elements

The first set of elements are used to manage XRDs, particularly from the perspective of caching, error handling, and delegation. Note that to prevent processing conflicts, the XRD schema permits a choice of either `xrd:XRD/xrd:Redirect` elements or `xrd:XRD/xrd:Ref` elements but not both.

### **xrd:XRD**

Container element for all other XRD elements. Attributes:

- `xml:id` (type `xs:ID`). OPTIONAL except in trusted resolution where it is REQUIRED to uniquely identify this element within the containing `xrds:XRDS` document. See sections 4.3.1 and 12.5. Note that this attribute is not explicitly declared in the normative schema as it is an implicit XML attribute defined in [XMLID].
- `idref` (type `xs:idref`). OPTIONAL except in trusted resolution where it is REQUIRED when an XRD element in a nested `xrd:XRDS` document must reference a previously included XRD instance. See sections 4.3.1 and 12.5.
- `version` (type `xs:string`). OPTIONAL for uses outside of XRI resolution but REQUIRED for XRI resolution as defined in section 4.3.2.

### **xrd:XRD/xrd:Type**

0 or more per `xrd:XRD` element. A unique identifier of type `xs:anyURI` that identifies the type of this XRD. This element is provided to support XRD extensibility as described in section 17.1.1. If no instances of this element are present, the type is defined by this specification. If one or more instances of this element are present, the requirements of the specified XRD type SHOULD be defined by an extension specification, which SHOULD be dereferenceable from the URI, IRI, or XRI used as the value of this element. In all cases XRD processors MAY ignore instances of this element and process the XRD as specified in this document.

Comment [DSR3]: New for XRD extensibility per the comment from Eran Hammer-Lahav.

### **xrd:XRD/xrd:Query**

0 or 1 per `xrd:XRD` element. Expresses the XRI, IRI, or URI reference in URI-normal form whose resolution results in this `xrd:XRD` element. See section 5.1.

### **xrd:XRD/xrd:Status**

0 or 1 per `xrd:XRD` element. RECOMMENDED for all XRDs. REQUIRED if the resolver must report certain error conditions. The contents of the element are a human-readable message string describing the status of the response as determined by the resolver. For XRI resolution, values of the Status element are defined in section 15. Attributes:

- `code` (type `xs:int`). REQUIRED. Provides a numeric status code. See section 15.
- `cid` (type `xs:enumeration`). OPTIONAL except when REQUIRED to report the results of CanonicalID verification as defined in section 14.3.4.
- `ceid` (type `xs:enumeration`). OPTIONAL except when REQUIRED to report the results of CanonicalID verification as defined in section 14.3.4.

### **xrd:XRD:xrdServerStatus**

0 or 1 per `xrd:XRD` element. Identical to `xrd:XRD/xrd:Status` except this element is used by an XRI authority server to report the status of a resolution request to an XRI resolver, and it does not include the `cid` and `ceid` attributes. See section 15.1. Attributes:

- `code` (type `xs:int`). REQUIRED. Provides a numeric status code. See section 15.

501 **xrd:XRD/xrd:Expires**  
502 0 or 1 per `xrd:XRD` element. The date/time, in the form of `xs:dateTime`, after which  
503 this XRD cannot be relied upon. To promote interoperability, this date/time value  
504 SHOULD use the UTC "Z" time zone and SHOULD NOT use fractional seconds. A  
505 resolver MUST NOT use an XRD after the time stated here. A resolver MAY discard this  
506 XRD before the time indicated in this result. If the HTTP transport caching semantics  
507 specify an expiry time earlier than the time expressed in this attribute, then a resolver  
508 MUST NOT use this XRD after the expiry time declared in the HTTP headers per section  
509 13.2 of [RFC2616]. See section 16.2.1.

510 **xrd:XRD/xrd:Redirect**  
511 0 or more per `xrd:XRD` element. Type `xs:anyURI`. MUST contain an absolute HTTP(S)  
512 URI. Choice between this or the `xrd:XRD/xrd:Ref` element below. MUST be  
513 processed by a resolver to locate another XRDS document authorized to describe the  
514 target resource as defined in section 12. Attributes:  
515

- `priority` (type `xs:nonNegativeInteger`). OPTIONAL. See section 4.3.3.
- `append` (type `xs:enumeration`). OPTIONAL. Governs construction of the final  
516 redirect URI as defined in section 13.7.

517

518 **xrd:XRD/xrd:Ref**  
519 0 or more more per `xrd:XRD` element. Type `xs:anyURI`. MUST contain an absolute  
520 XRI. Choice between this or the `xrd:XRD/xrd:Redirect` element above. MUST be  
521 processed by a resolver (depending on the value of the `refs` subparameter) to locate  
522 another XRDS document authorized to describe the target resource as defined in section  
523 12. Attributes:  
524

- `priority` (type `xs:nonNegativeInteger`). OPTIONAL. See section 4.3.3.

## 525 4.2.2 Trust Elements

526 The second set of elements are for applications where trust must be established in the identifier  
527 authority providing the XRD. These elements are OPTIONAL for generic authority resolution  
528 (section 9), but may be REQUIRED for specific types of trusted authority resolution (section 10)  
529 and CanonicalID verification (section 14.3).

530 **xrd:XRD/xrd:ProviderID**  
531 0 or 1 per `xrd:XRD` element. A unique identifier of type `xs:anyURI` for the parent  
532 authority providing this XRD. The value of this element MUST be a persistent identifier.  
533 There MUST be negligible probability that the value of this element will be assigned as an  
534 identifier to any other authority. ~~It is RECOMMENDED to use a fully persistent XRI as  
535 defined in [XRISyntax]. If a URN [RFC2141] or other persistent identifier is used, it is  
536 RECOMMENDED to express it as an XRI cross-reference as defined in [XRISyntax].~~  
537 Note that for XRI authority resolution, the authority identified by this element is the parent  
538 authority (the provider of the current XRD), not the child authority (the target of the  
539 current XRD). The latter is identified by the `xrd:XRD/xrd:Service/xrd:ProviderID`  
540 element inside a authority resolution service endpoint (see below).

**Deleted:** For purposes of CanonicalID verification (section 14.3),

**Comment [DSR4]:** Deleted per revision to section 14.3.2 as suggested by Wil Tan.

541 **xrd:XRD/saml:Assertion**

542 0 or 1 per `xrd:XRD` element. A SAML assertion from the provider of the current XRD  
543 that asserts that the information contained in the current XRD is authoritative. Because  
544 the assertion is digitally signed and the digital signature encompasses the containing  
545 `xrd:XRD` element, it also provides a mechanism for the recipient to detect unauthorized  
546 changes since the last time the XRD was published.

547 Note that while a `saml:Issuer` element is required within a `saml:Assertion` element,  
548 this specification makes no requirement as to the value of the `saml:Issuer` element. It  
549 is up to the XRI community root authority to place restrictions, if any, on the  
550 `saml:Issuer` element. A suitable approach is to use an XRI in URI-normal form that  
551 identifies the community root authority. See section 9.1.3.

552 **4.2.3 Synonym Elements**

553 In XRDS architecture, an identifier is a *synonym* of the query identifier (the identifier resolved to  
554 obtain the XRDS document) if it is not character-for-character equivalent but identifies the same  
555 target resource (the resource to which the identifier was assigned by the identifier authority). The  
556 normative rules for synonym usage are specified in section 5.

557 **xrd:XRD/xrd:LocalID**

558 0 or more per `xrd:XRD` element. Type `xs:anyURI`. Asserts an interchangeable  
559 synonym for the value of the `xrd:Query` element. See section 5.2.1 for detailed  
560 requirements. Attributes:

- 561
  - `priority` (type `xs:nonNegativeInteger`). OPTIONAL. See section 4.3.3.

562 **xrd:XRD/xrd:EquiVID**

563 0 or more per `xrd:XRD` element. Type `xs:anyURI`. Asserts an absolute identifier for the  
564 target resource that is not equivalent to the `CanonicalID` or `CanonicalEquiVID` (see  
565 below). See section 5.2.2 for detailed requirements. Attributes:

- 566
  - `priority` (type `xs:nonNegativeInteger`). OPTIONAL. See section 4.3.3.

567 **xrd:XRD/xrd:CanonicalID**

568 0 or 1 per `xrd:XRD` element. Type `xs:anyURI`. Asserts the canonical identifier assigned  
569 to the target resource by the authority providing the XRD. See section 5.2.3 for detailed  
570 requirements.

571 **xrd:XRD/xrd:CanonicalEquiVID**

572 0 or 1 per `xrd:XRD` element. Type `xs:anyURI`. Asserts the canonical identifier for the  
573 target resource assigned by *any* identifier authority. See section 5.2.4 for detailed  
574 requirements.

575 **4.2.4 Service Endpoint Descriptor Elements**

576 The next set of elements is used to describe service endpoints—the set of network endpoints  
577 advertised in an XRD for performing delegated resolution, obtaining further metadata, or  
578 interacting directly with the target resource. Again, because there can be more than one instance  
579 of a service endpoint that satisfies a service endpoint selection query, or more than one instance  
580 of these elements inside a service descriptor, these elements all accept the global `priority`  
581 attribute (section 4.3.3).

582 IMPORTANT: Establishing unambiguous priority is especially important for service endpoints  
583 because they are used to control the direction of authority resolution, the order of Redirect and  
584 Ref processing, and the prioritization of the final service endpoint URIs selected (if any). See  
585 section 4.3.3 for rules and recommendations about usage of the `priority` attribute.

586 Note that to prevent processing conflicts, the XRD schema permits only one of these element  
587 types in a service endpoint: `xrd:URI`, `xrd:Redirect`, or `xrd:Ref`.

#### 588 **xrd:XRD/xrd:Service**

589 0 or more per `xrd:XRD` element. The container element for service endpoint metadata.  
590 Referred to by the abbreviation *SEP*. Attributes:

- 591 • `priority` (type `xs:nonNegativeInteger`). OPTIONAL. See section 4.3.3.

#### 592 **xrd:XRD/xrd:Service/xrd:LocalID**

593 0 or more per `xrd:XRD/xrd:Service` element. Identical to the  
594 `xrd:XRD/xrd:LocalID` element defined above except this synonym is asserted by the  
595 provider of the service and not the parent authority for the XRD. MAY be used to provide  
596 one or more identifiers by which the target resource SHOULD be identified in the context  
597 of the service endpoint. See section 5.2.1 for detailed requirements. Attributes:

- 598 • `priority` (type `xs:nonNegativeInteger`). OPTIONAL. See section 4.3.3.

#### 599 **xrd:XRD/xrd:Service/xrd:URI**

600 0 more per `xrd:XRD/xrd:Service` element. Type `xs:anyURI`. Choice between this or  
601 the `xrd:XRD/xrd:Service/xrd:Redirect` or `xrd:XRD/xrd:Service/xrd:Ref`  
602 elements. If present, it indicates a transport-level URI for accessing the capability  
603 described by the parent `Service` element. For the service types defined for XRI resolution  
604 in section 3.1.2, this URI MUST be an HTTP or HTTPS URI. Other services may use  
605 other transport protocols. Includes an optional `append` attribute that governs construction  
606 of the final service endpoint URI as defined in section 13.7. Attributes:

- 607 • `priority` (type `xs:nonNegativeInteger`). OPTIONAL. See section 4.3.3.

#### 608 **xrd:XRD/xrd:Service/xrd:Redirect**

609 0 more per `xrd:XRD/xrd:Service` element. Choice between this or the  
610 `xrd:XRD/xrd:Service/xrd:URI` or `xrd:XRD/xrd:Service/xrd:Ref` elements.  
611 Identical to the `xrd:XRD/xrd:Redirect` element defined above except processed only  
612 in the context of service endpoint selection. See section 12. Attributes:

- 613 • `priority` (type `xs:nonNegativeInteger`). OPTIONAL. See section 4.3.3.

#### 614 **xrd:XRD/xrd:Service/xrd:Ref**

615 0 more per `xrd:XRD/xrd:Service` element. Choice between this or the  
616 `xrd:XRD/xrd:Service/xrd:URI` or `xrd:XRD/xrd:Service/xrd:Redirect`  
617 elements. Identical to the `xrd:XRD/xrd:Ref` element defined above except processed  
618 only in the context of service endpoint selection. See section 12. Attributes:

- 619 • `priority` (type `xs:nonNegativeInteger`). OPTIONAL. See section 4.3.3.

## 620 4.2.5 Service Endpoint Trust Elements

621 Similar to the XRD trust elements defined above, these elements enable trust to be established in  
622 the provider of the service endpoint. These elements are OPTIONAL for generic authority  
623 resolution (section 9), but REQUIRED for SAML trusted authority resolution (section 10.2).

### 624 **xrd:XRD/xrd:Service/xrd:ProviderID**

625 0 or 1 per `xrd:XRD/xrd:Service` element. Identical to the  
626 `xrd:XRD/xrd:ProviderID` above, except this identifies the provider of the *described*  
627 *service endpoint* instead of the provider of the XRD. For an XRI authority resolution  
628 service endpoint, it identifies the *child authority* who will perform resolution of subsequent  
629 XRI subsegments. In SAML trusted resolution, when a resolution request is made to the  
630 child authority at this service endpoint, the contents of the `xrd:XRD/xrd:ProviderID`  
631 element in the response MUST match the content of this element for correlation as  
632 defined in section 10.2.5. The same usage MAY apply to other services not defined in  
633 this specification. Authors of other specifications employing XRD service endpoints  
634 SHOULD define the scope and usage of this element, particularly for trust verification.

### 635 **xrd:XRD/xrd:Service/ds:KeyInfo**

636 0 or 1 per `xrd:XRD/xrd:Service` element. This element provides the digital signature  
637 metadata necessary to validate interaction with the resource identified by the  
638 `xrd:XRD/xrd:Service/xrd:ProviderID` (above). In XRI resolution, this element  
639 comprises the key distribution method for SAML trusted authority resolution as defined in  
640 section 10.2.5. The same usage MAY apply to other services not defined in this  
641 specification.

## 642 4.2.6 Service Endpoint Selection Elements

643 The final set of service endpoint descriptor elements is used in XRI resolution for service endpoint  
644 selection. These all include two global attributes used for this purpose: `match` and `select`.

### 645 **xrd:XRD/xrd:Service/xrd:Type**

646 0 or more per `xrd:XRD/xrd:Service` element. A unique identifier of type `xs:anyURI`  
647 that identifies the type of capability available at this service endpoint. See section 3.1.2  
648 for the resolution service types defined in this specification. If a service endpoint does not  
649 include at least one `xrd:Type` element, the service type is effectively described by the  
650 type of URI specified in the `xrd:XRD/xrd:Service/xrd:URI` element, i.e., an HTTP  
651 URI specifies an HTTP service. See section 13.3.6 for Type element matching rules.  
652 Attributes:

- 653 • `match` (type `xs:enumeration`). OPTIONAL. See section 13.3.2.
- 654 • `select` (type `xs:boolean`). OPTIONAL. See section 13.4.2.

### 655 **xrd:XRD/xrd:Service/xrd:Path**

656 0 or more per `xrd:XRD/xrd:Service` element. Of type `xs:string`. Contains a string  
657 meeting the `xri-path` production defined in section 2.2.3 of [XRISyntax]. See section  
658 13.3.7 for Path element matching rules. Attributes:

- 659 • `match` (type `xs:enumeration`). OPTIONAL. See section 13.3.2.
- 660 • `select` (type `xs:boolean`). OPTIONAL. See section 13.4.2.

### 661 **xrd:XRD/xrd:Service/xrd:MediaType**

662 0 or more per `xrd:XRD/xrd:Service` element. Of type `xs:string`. The media type of  
663 content available at this service endpoint. The value of this element MUST be of the form

664 of a media type defined in [RFC2046]. See section 3.3 for the media types used in XRI  
665 resolution. See section 13.3.8 for MediaType element matching rules. Attributes:

666 • `match` (type `xs:enumeration`). OPTIONAL. See section 13.3.2.

667 • `select` (type `xs:boolean`). OPTIONAL. See section 13.4.2.

668 The XRD schema (Appendix B) allows other elements and attributes from other namespaces to  
669 be added throughout. As described in section 17.1.1, these points of extensibility can be used to  
670 deploy new XRI resolution schemes, new service description schemes, or other metadata about  
671 the described resource.

## 672 4.3 XRD Attribute Processing Rules

### 673 4.3.1 ID Attribute

674 For uses such as SAML trusted resolution (section 10.2) that require unique identification of  
675 multiple XRD elements within an XRDS document, the XRD element uses the implicit `xml:id`  
676 attribute as defined by the W3C XML ID specification [XMLID]. Note that this attribute is NOT  
677 explicitly declared in either the RelaxNG schema in Appendix B or the XML Schema in Appendix  
678 C since it is inherently included by the extensibility design of both schemas.

679 If present, the value of this attribute MUST be unique for all elements in the containing XML  
680 document. Because an XRI resolver may need to assemble multiple XRDs received from different  
681 authority servers into one XRDS document, there MUST be negligible probability that the value of  
682 the `xrd:XRD/@xml:id` attribute is not globally unique. For this reason the value of this attribute  
683 SHOULD be a UUID as defined by [UUID] prefixed by a single underscore character (“\_”) in  
684 order to make it a legal *NCName* as required by [XMLID]. However, the value of this attribute  
685 MAY be generated by any algorithm that fulfills the same requirements of global uniqueness and  
686 *NCName* conformance.

687 Note that when an XRI resolver is assembling multiple XRDs into a single XRDS document, their  
688 XML document order MUST match the order in which they were resolved (see section 9.1.2).  
689 Also, if Redirect or Ref processing requires the same XRD to be included in an XRDS document  
690 twice (via a nested XRDS document), that XRD MUST reference the previous instance using the  
691 `xrd:XRD/@idref` attribute as defined in section 12.5.

### 692 4.3.2 Version Attribute

693 Unlike the XRDS element, which is not intended to be versioned, the `xrd:XRD` element has the  
694 optional attribute `xrd:XRD/@version`. Use of this attribute is REQUIRED for XRI resolution.  
695 The value of this attribute MUST be the exact numeric version value of the XRI Resolution  
696 specification to which the containing XRD element conforms. See sections 3.1.1 and 17.2.1.

697 General rules about versioning of the XRI resolution protocol are defined in section 17.2. Specific  
698 rules for processing the XRD version attribute are specified in section 17.2.4.

### 699 4.3.3 Priority Attribute

700 Certain XRD elements involved in the XRI resolution process (`xrd:Redirect`, `xrd:Ref`,  
701 `xrd:Service`, and `xrd:URI`) may be present multiple times in an XRDS document to enable  
702 delegation, provide redundancy, expose differing capabilities, or other purposes. In this case XRD  
703 authors SHOULD use the global `priority` attribute to prioritize selection of these element  
704 instances. Like the priority attribute of DNS records, this attribute accepts a non-negative integer  
705 value.

706 Following are the normative processing rules that apply whenever there is more than one  
707 instance of the same type of element selected in an XRD (if there is only one instance selected,  
708 the `priority` attribute is ignored.)

- 709 1. The consuming application SHOULD select the element instance with the lowest numeric  
710 value of the `priority` attribute. For example, an element with `priority` attribute value  
711 of "10" should be selected before an element with a `priority` attribute value of "11",  
712 and an element with `priority` attribute value of "11" should be selected before an  
713 element with a `priority` attribute value of "25". Zero is the highest `priority` attribute  
714 value. Null is the lowest `priority` attribute value—it is the equivalent of a value of  
715 infinity. It is RECOMMENDED to use a large finite value (100 or more) rather than a null  
716 value.
- 717 2. If an element has no `priority` attribute, its `priority` attribute value is considered to  
718 be null, i.e., the lowest possible priority value. Rather than omitting a `priority` attribute,  
719 it is RECOMMENDED that XRI authorities follow the standard practice in DNS and set  
720 the default `priority` attribute value to "10".
- 721 3. If two or more instances of the same element type have identical `priority` attribute  
722 values (including the null value), the consuming application SHOULD select one of the  
723 instances at random. This consuming application SHOULD NOT simply choose the first  
724 instance that appears in XML document order.

725 **IMPORTANT:** It is vital that implementers observe the preceding rule in order to support  
726 intentional redundancy or load balancing semantics. At the same time, it is vital that XRDS  
727 authors understand that this rule can result in non-deterministic behavior if two or more of the  
728 same type of synonym elements or service endpoint elements are included with the same priority  
729 in an XRD but are NOT intended for redundancy or load balancing.

- 730 4. An element selected according to these rules is referred to in this specification as *the*  
731 *highest priority element*. If this element is subsequently disqualified from the set of  
732 qualified elements, the next element selected according to these rules is referred to as  
733 *the next highest priority element*. If a resolution operation specifying selection of the  
734 highest priority element fails, the resolver SHOULD attempt to select the next highest  
735 priority element unless otherwise specified. This process SHOULD be continued for all  
736 other instances of the qualified elements until success is achieved or all instances are  
737 exhausted.

#### 738 4.4 XRI and IRI Encoding Requirements

739 The W3C XML 1.0 specification [XML] requires values of XML elements of type `xs:anyURI` to  
740 be valid IRIs. Thus all XRIs used as the values of XRD elements of this type MUST be in at least  
741 IRI-normal form as defined in section 2.3 of [XRISyntax].

742 A further restriction applies to XRIs or IRIs used in XRI resolution because it relies on HTTP(S) as  
743 a transport protocol. Therefore when an XRI or IRI is used as the value of an `xrd:Query`,  
744 `xrd:LocalID`, `xrd:EquivID`, `xrd:CanonicalID`, `xrd:CanonicalEquivID`,  
745 `xrd:Redirect`, `xrd:Ref`, `xrd:Type`, or `xrd:Path` element, it MUST be in URI-normal form  
746 as defined in section 2.3 of [XRISyntax].

747 Note: XRIs composed entirely of valid URI characters and which do not use XRI parenthetical  
748 cross-reference syntax do not require escaping in the transformation to URI-normal form.  
749 However, XRIs that use characters valid only in IRIs or that use XRI parenthetical cross-reference  
750 syntax may require percent encoding in the transformation to URI-normal form as explained in  
751 section 2.3 of [XRISyntax].

## 752 5 XRD Synonym Elements

753 XRDS architecture includes support for *synonyms*—XRI, IRIs, or URIs that are not character-for-  
754 character equivalent, but which identify the same target resource (in the same context, or across  
755 different contexts). Table 7 lists the four synonym elements supported in XRDs.

XRD Synonym Element	Cardinality	Resolution Scope	Assigning Authority	Resolves to different XRD?
LocalID	Zero-or-more	Local	MUST be the parent authority	MUST NOT
EquivID	Zero-or-more	Global	Any authority	SHOULD
CanonicalID	Zero-or-one	Global	MUST be the parent authority	MUST NOT
CanonicalEquivID	Zero-or-one	Global	Any authority	SHOULD

756 Table 7: The four XRD synonym elements.

757 This section specifies the normative rules for usage of each XRD synonym element.

### 758 5.1 Query Identifiers

759 Each XRI synonym element asserts a synonym for the *query identifier*. This is the identifier  
760 resolved to obtain the XRDS document containing the XRD asserting the synonym. A *fully-*  
761 *qualified query identifier* may be either:

- 762 1. A valid absolute HTTP(S) URI that does not contain an XRI.
- 763 2. A valid absolute XRI, either in a standard XRI form as defined in **[XRISyntax]**, or  
764 encoded in an HTTP(S) URI (called an *HXRI*) as specified in section 11.2.

#### 765 5.1.1 HTTP(S) URI Query Identifiers

766 If the fully-qualified query identifier is an absolute HTTP(S) URI, the XRDS document to which it  
767 resolves (via the protocol specified in section 6) MUST contain a single XRD. This XRD MAY  
768 include an `xrd:Query` element; if present, the value MUST be equivalent to the original HTTP(S)  
769 URI query identifier.

770 In this single XRD, all synonym elements in Table 7 assert synonyms for the original HTTP(S)  
771 URI.

#### 772 5.1.2 XRI Query Identifiers

773 If the fully-qualified query identifier is an absolute XRI, the XRDS document to which it resolves  
774 (via the protocol specified in section 9.1.2) MAY contain multiple XRDs, each XRD corresponding  
775 to one subsegment of the authority component of the XRI. Each XRD SHOULD include an  
776 `xrd:Query` element that echos back the XRI subsegment described by this XRD. This is called  
777 the *local query identifier*, because it represents just one subsegment of the fully-qualified query  
778 identifier.

779 At any point in the XRI resolution chain, the combination of the community root authority XRI  
780 (section 9.1.3) plus all local query identifiers resolved in all XRDs up to that point is called the  
781 *current fully-qualified query identifier*. When the resolution chain is complete, the current fully-  
782 qualified query identifier is equal to the starting fully-qualified query identifier.



783 In each XRD in the resolution chain, the LocalID element asserts a synonym for the local query  
784 identifier, and the EquivID, CanonicalID, and CanonicalEquivID elements assert a synonym for  
785 the current fully-qualified query identifier.

## 786 5.2 Synonym Elements

### 787 5.2.1 LocalID

788 In an XRD, a synonym for the local query identifier is asserted using the `xrd:LocalID` element.  
789 LocalIDs may be used at both the XRD level (as a child of the root `xrd:XRD` element) and at the  
790 service endpoint (SEP) level (as a child of the root `xrd:XRD/xrd:Service` element).

791 At the XRD level, the value of the `xrd:XRD/xrd:LocalID` element asserts a synonym that is  
792 interchangeable with the contents of the `xrd:Query` element in the XRD. This means that  
793 resolution of a LocalID in the context of the same parent authority using the same resolution  
794 query parameters as the current query MUST result in an equivalent XRD as defined in section  
795 5.4. It also means an XRI resolver MAY use a LocalID as an alternate key for the XRD in its  
796 cache (see section 16.4.2).

797 If the parent authority has assigned a persistent local identifier to the resource described by an  
798 XRD, it SHOULD return this persistent identifier as an `xrd:XRD/xrd:LocalID` value in any  
799 resolution response for a reassignable local identifier for the same resource. The reverse MAY  
800 also be true, however parent authorities MAY adopt privacy or other policies that restrict the  
801 reassignable synonyms returned for any particular resolution request.

802 At the SEP level, the `xrd:XRD/xrd:Service/xrd:LocalID` element MAY be used to express  
803 either a local or global identifier for the target resource in the context of the specific service being  
804 described. If present, consuming applications SHOULD use the value of the highest priority  
805 instance of the `xrd:XRD/xrd:Service/xrd:LocalID` element to identify the target resource  
806 in the context of this service endpoint. If not present, consuming applications SHOULD select a  
807 synonym as defined in section 5.6.

808 SPECIAL SECURITY CONSIDERATIONS: A parent authority SHOULD NOT permit a child  
809 authority to edit a LocalID value in an XRD without authenticating the child authority and verifying  
810 that the child authority is authorized to use this LocalID value either at the XRD level and/or the  
811 SEP level.

### 812 5.2.2 EquivID

813 In an XRD, any synonym for the current fully-qualified query identifier *except* a CanonicalID or a  
814 CanonicalEquivID (see below) is asserted using the `xrd:EquivID` element. Unlike a LocalID, an  
815 EquivID is NOT REQUIRED to be issued by the parent authority.

816 An EquivID MUST be an absolute identifier. For durability of the reference, it is RECOMMENDED  
817 to use a persistent identifier such as a persistent XRI [**XRISyntax**] or a URN [**RFC2141**].

818 An EquivID element is OPTIONAL in an XRD except in two cases:

- 819 1. When it is REQUIRED as a backpointer to verify another EquivID element in a different  
820 XRD as specified in section 14.2.
- 821 2. When it is REQUIRED as a backpointer to verify a CanonicalEquivID element as  
822 specified in section 14.3.3.

823 SPECIAL SECURITY CONSIDERATIONS: An EquivID synonym SHOULD NOT be trusted  
824 unless it is verified. This function is not performed automatically by XRI resolvers but may be  
825 easily performed by consuming applications using one additional XRI resolution call as specified  
826 in section 14.2. A parent authority SHOULD NOT permit a child authority to edit the EquivID value  
827 in an XRD without authenticating the child authority and verifying that the child authority is

828 authorized to use this EquivID value. A parent authority SHOULD NOT assert an EquivID  
829 element if the identifier authority to whom it points is not authorized to make a CanonicalEquivID  
830 assertion.

### 831 5.2.3 CanonicalID

832 The purpose of the `xrd:CanonicalID` element is to assert the canonical identifier assigned by  
833 the parent authority to the target resource described by an XRD. It plays a special role in XRD  
834 synonym architecture because it is the ultimate test of XRD equivalence as defined in section 5.4.  
835 A CanonicalID MUST meet all the requirements of an EquivID plus the following:

- 836 1. It MUST be an identifier for which the parent authority is the final authority. This means  
837 that resolution of a CanonicalID using the same resolution query parameters as the  
838 current query MUST result in an equivalent XRD as defined in section 5.4.
- 839 2. If the CanonicalID is any XRI except a community root authority XRI (section 9.1.3), it  
840 MUST consist of the parent authority's CanonicalID plus one additional subsegment. (In  
841 XRI resolution the parent authority's CanonicalID is always in the immediately preceding  
842 XRD in the same XRDS document, not in a nested XRDS document produced as a result  
843 of Redirect and Ref processing as defined in section 12.5.) For example, if the  
844 CanonicalID asserted for a target resource is `@!1!2!3`, then the CanonicalID for the  
845 parent authority must be `@!1!2`. See section 14.3.2 for details.
- 846 3. Once assigned, a parent authority SHOULD NEVER: a) change or reassign a  
847 CanonicalID value, or b) stop asserting a CanonicalID element in an XRD in which it has  
848 been asserted. For this reason, it is STRONGLY RECOMMENDED to use a persistent  
849 identifier such as a persistent XRI [XRISyntax] or a URN [RFC2141].

850 As a best practice, a parent authority SHOULD ALWAYS publish a CanonicalID element in an  
851 XRD, even if its value is equivalent to the current fully-qualified query identifier. This practice:

- 852 • Makes it unambiguous to consuming applications which absolute synonym they should use to  
853 identify the target resource in the context of the parent authority.
- 854 • Enables child authorities to issue their own verifiable CanonicalIDs.
- 855 • Enables verification of a CanonicalEquivID if asserted (below).

856 SPECIAL SECURITY CONSIDERATIONS: A CanonicalID synonym SHOULD NOT be trusted  
857 unless it is verified. CanonicalID verification is performed automatically during resolution by an  
858 XRI resolver unless this function is explicitly turned off; see section 14. A parent authority  
859 SHOULD NOT permit a child authority to edit the CanonicalID value in an XRD without  
860 authenticating the child authority and verifying that the child authority is authorized to use this  
861 CanonicalID value.

### 862 5.2.4 CanonicalEquivID

863 The purpose of the `xrd:CanonicalEquivID` element is to assert a canonical synonym for the  
864 fully-qualified query identifier for which the parent authority MAY NOT be authoritative. A  
865 CanonicalEquivID MUST meet all the requirements of an EquivID plus the following:

- 866 1. In order for the value of the `xrd:CanonicalEquivID` element to be verified: a) the  
867 XRD in which it appears MUST include a CanonicalID that can be verified as specified in  
868 section 14.2, and b) the XRD to which it resolves MUST meet the rules specified in  
869 section 14.3.3. In particular, those rules require that the CanonicalID of that XRD match  
870 the asserted CanonicalEquivID.
- 871 2. For the same reasons as with a CanonicalID, it is STRONGLY RECOMMENDED to use  
872 a persistent identifier such as a persistent XRI [XRISyntax] or a URN [RFC2141].

873 3. Although the CanonicalEquivID associated with a CanonicalID MAY change over time, at  
874 any one point in time, every XRD from the same parent authority that asserts the same  
875 CanonicalID value MUST assert the same CanonicalEquivID value if the XRD includes a  
876 CanonicalEquivID element.

877 As a best practice, a parent authority SHOULD publish a CanonicalEquivID in an XRD if  
878 consuming applications SHOULD be able to persistently identify the target resource using this  
879 identifier in other contexts. Also, a CanonicalEquivID value SHOULD change very infrequently, if  
880 at all.

881 SPECIAL SECURITY CONSIDERATIONS: A CanonicalEquivID synonym SHOULD NOT be  
882 trusted unless it is verified. Verification of the value of the CanonicalEquivID element in the final  
883 XRD in an XRDS document is performed automatically during resolution by an XRI resolver  
884 unless this function is explicitly turned off; see section 14. A parent authority SHOULD NOT  
885 permit a child authority to edit the CanonicalEquivID value in an XRD without authenticating the  
886 child authority and verifying that the child authority is authorized to use this CanonicalEquivID  
887 value.

### 888 5.3 Redirect and Ref Elements

889 While similar in some ways to synonym elements, the `xrd:Redirect` and `xrd:Ref` elements  
890 MUST NOT be used to assert a synonym. Instead their purpose is to assert that a different XRDS  
891 document is authorized to serve as an equally valid descriptor of the target resource. These  
892 elements enable separation of synonym assertion semantics vs. distributed XRDS document  
893 authorization semantics.

894 In the same way as a LocalID, both a Redirect and a Ref may be used in an XRD at either the  
895 XRD level (as a child of the root `xrd:XRD` element) and at the SEP level (as a child of the root  
896 `xrd:XRD/xrd:Service` element). The complete rules for Redirect and Ref processing in XRI  
897 resolution are specified in section 12.

898 If two independent resources are later merged into the same resource, e.g., two businesses are  
899 merged into one, the use of an EquivID, CanonicalID, or CanonicalEquivID element SHOULD be  
900 combined with the use of a Redirect or Ref element to provide the semantics of BOTH identifier  
901 synonymity and XRDS authorization.

902 SPECIAL SECURITY CONSIDERATIONS: A parent authority SHOULD NOT permit a child  
903 authority to edit a Redirect or Ref value in an XRD without authenticating the child authority and  
904 verifying that the child authority is authorized to use this Redirect or Ref value at either the XRD  
905 level and/or the SEP level.

### 906 5.4 XRD Equivalence

907 LocalID and CanonicalID synonyms are required to resolve to an XRD that is equivalent to the  
908 XRD in which the synonym is asserted. Two XRDS MUST be considered equivalent if they meet  
909 the following rules:

- 910 1. Both XRDS contain a CanonicalID element.
- 911 2. The values of these CanonicalID elements are equivalent according to the equivalence  
912 rules of the applicable identifier scheme. Note that these identifiers MUST be in URI-  
913 normal form as specified in section 4.4. In addition, if the CanonicalID values are  
914 HTTP(S) URIs, fragments MUST be considered significant in comparison.

915 In addition, while not strictly required for XRD equivalence, section 5.2.4 REQUIRES that two  
916 equivalent XRDS issued at the same point in time assert the same CanonicalEquivID value if they  
917 both contain a CanonicalEquivID element. It is RECOMMENDED that all other elements in the  
918 XRD that are not relative to a specific resolution request also be equivalent.

## 919 5.5 Synonym Verification

920 For security purposes, it is STRONGLY RECOMMENDED that a consuming application not rely  
921 on EquivID, CanonicalID, or CanonicalEquivID synonyms unless they are verified as specified in  
922 section 14.

## 923 5.6 Synonym Selection

924 It is out of the scope of this specification to specify policies consuming applications should use to  
925 select their desired synonym(s) to identify a target resource. However, the following are  
926 RECOMMENDED best practices:

- 927 • Only select a verified synonym (see above).
- 928 • Select a persistent synonym, particularly if a long term or immutable reference is required. If  
929 a persistent synonym is present, other reassignable synonyms (including the current fully-  
930 qualified query identifier) SHOULD be treated only as temporary identifiers.
- 931 • Select a CanonicalID if present, verified, and persistent. This identifier SHOULD be used  
932 whenever referencing the target resource in the context of the parent authority issuing the  
933 CanonicalID.
- 934 • If possible, *also* select a CanonicalEquivID if present, verified, and persistent. This identifier  
935 SHOULD be used as a reference to the target resource in any context other than that of the  
936 parent authority.
- 937 • When selecting a synonym to use in the context of a specific service endpoint, follow the  
938 recommendations for use of the `xrd:XRD/xrd:Service/xrd:LocalID` element as  
939 specified in section 5.2.1.

---

## 940 6 Discovering an XRDS Document from an 941 HTTP(S) URI

942 A resource described by an XRDS document and potentially identified by one or more XRI may  
943 also be identified with one or more HTTP(S) URIs. For backwards compatibility with HTTP(S)  
944 infrastructure, this section defines two protocols, originally specified in [Yadis], for discovering an  
945 XRDS document starting with an HTTP(S) URI.

### 946 6.1 Overview

947 There are two protocols for discovery of an XRDS document from an HTTP(S) URI:

- 948 1. *HEAD protocol*: using an HTTP(S) HEAD request to obtain a header with XRDS  
949 document location information as specified in section 6.2.
- 950 2. *GET protocol*: using an HTTP(S) GET request with content negotiation as specified in  
951 section 6.3.

952 An XRDS server **MUST** support the GET protocol and **MAY** support the HEAD protocol. An  
953 XRDS client **MAY** attempt the HEAD protocol but **MUST** attempt the GET protocol if the HEAD  
954 protocol fails.

### 955 6.2 HEAD Protocol

956 Under this protocol the XRDS client **MUST** begin by issuing an HTTP(S) HEAD request. This  
957 request **SHOULD** include an Accept header specifying the content type  
958 `application/xrds+xml`.

959 The response from the XRDS server **MUST** be HTTP(S) response-headers only, which **MAY**  
960 include one or both of the following:

- 961 1. An `X-XRDS-Location` response-header.
- 962 2. A content type response-header specifying the content type `application/xrds+xml`.

963 If the response includes the first option above, the value of the `X-XRDS-Location` response-  
964 header **MUST** be an HTTP(S) URI which gives the location of an XRDS document describing the  
965 target resource. The XRDS client **MUST** then request this document as specified in section 6.3.

966 If the response includes the second option above, the XRDS client **MUST** request the XRDS  
967 document from the original HTTP(S) URI as specified in section 6.3.

968 If the response includes both options above, the value of the `X-XRDS-Location` element in the  
969 HTTP(S) response-header **MUST** take precedence.

970 If response includes neither of the two options above, this protocol fails and the XRDS client  
971 **MUST** fall back to using the protocol specified in section 6.3.

972 In all cases the HTTP(S) status messages and error codes defined in [RFC2616] apply.

### 973 6.3 GET Protocol

974 Under this protocol the XRDS client **MUST** begin by issuing an HTTP(S) GET request. This  
975 request **SHOULD** include an Accept header specifying the content type  
976 `application/xrds+xml`.

977 The XRDS server response **MUST** be one of four options:

- 978 1. HTTP(S) response-headers only as defined in section 6.2.

- 979 2. HTTP(S) response-headers as defined in section 6.2 together with a document, which  
980 MAY be either document type specified in options 3 or 4 below.
- 981 3. A valid HTML document with a <head> element that includes a <meta> element with an  
982 http-equiv attribute equal to X-XRDS-Location.
- 983 4. A valid XRDS document (content type application/xrds+xml).

984 If the response is only HTTP(S) response headers as defined in section 6.2, or if in addition to  
985 these response headers it includes any document other than the two document types defined in  
986 the third and fourth options above, the protocol MUST proceed as defined in section 6.2, *except*  
987 *that there is no fallback to this section if that protocol fails.*

988 If the response is only an HTML document as defined in the third option above, the value of the  
989 <meta> element with an http-equiv attribute equal to X-XRDS-Location MUST be an  
990 HTTP(S) URI which gives the location of an XRDS document describing the target resource. If  
991 this HTTP(S) URI is identical to the starting HTTP(S) URI, this is a loop and the protocol fails.  
992 Otherwise, the XRDS client MUST request the XRDS document from this URI using an HTTP(S)  
993 GET. This request SHOULD include an Accept header specifying the content type  
994 application/xrds+xml.

995 If the response includes both an HTTP(S) response header and the HTML document defined in  
996 the third option above, the value of the X-XRDS-Location element in the HTTP(S) response-  
997 header MUST take precedence.

998 If the response includes an XRDS document as specified in the fourth option above, the protocol  
999 has completed successfully.

1000 In all cases the HTTP(S) status messages and error codes defined in **[RFC2616]** apply.


1001 Note: If the XRDS server supports content negotiation, the response SHOULD include a Vary:  
1002 header to allow caches to properly interpret future requests. This header SHOULD be present  
1003 even in the case where the HTML page is returned (instead of an XRDS document).

1004

## 7 XRI Resolution Flow

1005  
1006  
1007  
1008

Logically, XRI resolution is a function invoked by an application to dereference an XRI into a descriptor of the target resource (or in some cases to a representation of the resource itself). Figure 2 is a top-level flowchart of this function highlighting the two major phases: *authority resolution* followed by *optional service endpoint selection*.

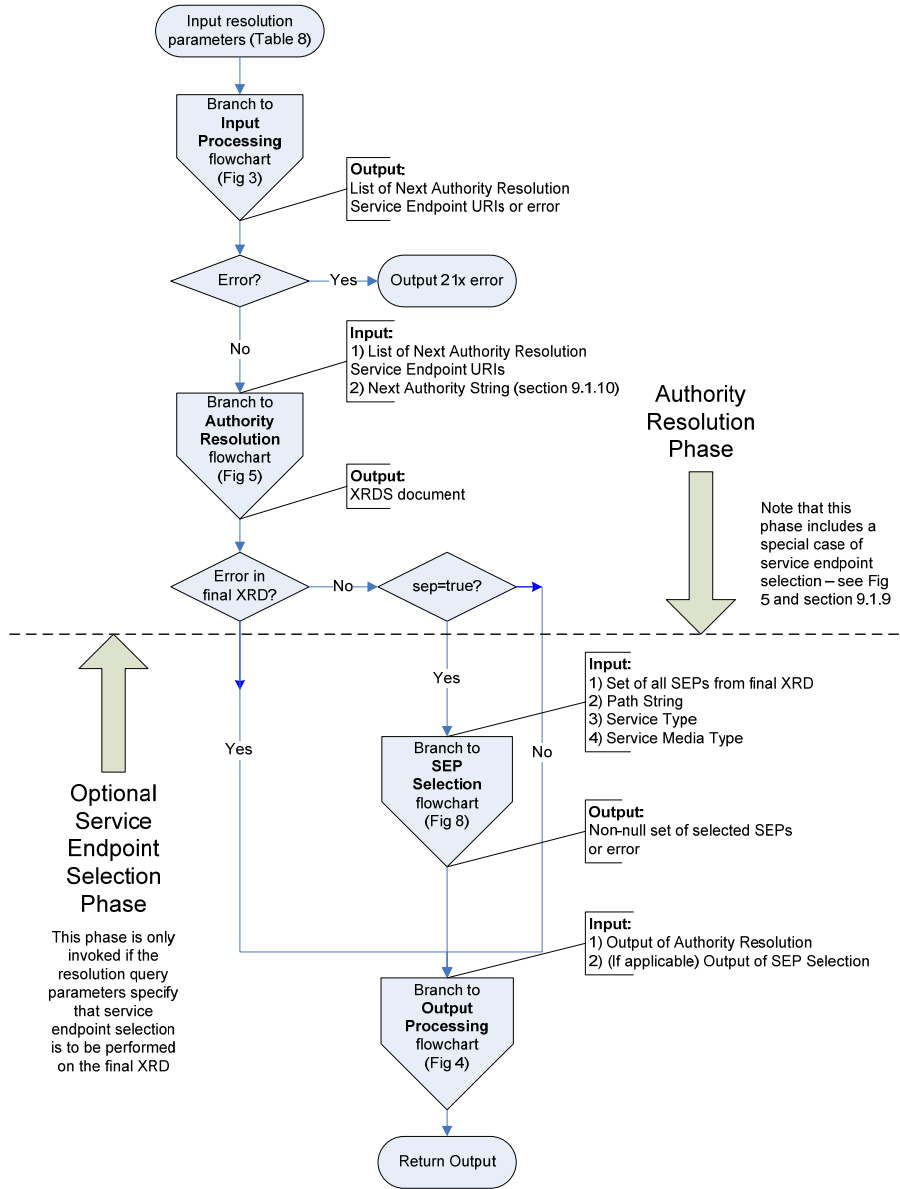

1009

1010

Figure 2: Top-level flowchart of XRI resolution phases.

1011 Branches of this top-level flowchart are used throughout the specification to provide a logical  
1012 overview of key components of XRI resolution. The branch flowcharts include:

- 1013 • Figure 3: Input processing (section 8.1).
- 1014 • Figure 4: Output processing (section 8.2).
- 1015 • **Figure 5: Authority resolution (section 9).**
- 1016 • Figure 6: XRDS requests (section 9.1.3).
- 1017 • **Figure 7: Redirect and Ref processing (section 12).**
- 1018 • **Figure 8: Service endpoint selection (section 13).**
- 1019 • Figure 9: Service endpoint selection logic (section 13.2).

1020 **IMPORTANT:** In all cases the flowcharts are informative and the specification text is normative.  
1021 However, the flowcharts are recommended as an aid in reading the specification. In particular,  
1022 those highlighted in **bold** above illustrate the recursive calls for authority resolution and service  
1023 endpoint selection used during Redirect and Ref processing (section 12). Implementers should  
1024 pay special attention to these calls and the guidance in section 12.6, *Recursion and Backtracking*.



1025

## 8 Inputs and Outputs

1026  
1027  
1028  
1029

This section defines the logical inputs and outputs of XRI resolution together with their processing rules. It does not specify a binding to a particular local resolver interface. A binding to an HTTP interface for XRI proxy resolvers is specified in section 11. For purposes of illustration, a binding to a non-normative, language-neutral API is suggested in Appendix F.

1030

### 8.1 Inputs

1031  
1032  
1033  
1034

Table 8 summarizes the logical input parameters to XRI resolution and whether they are applicable in the authority resolution phase or the service endpoint selection phase. In this specification, references to these parameters use the logical names in the first column. Local APIs MAY use different names for these parameters and MAY define additional parameters.

Logical Input Parameter Name	Type	Required/Optional	Default	Resolution Phase	Section
QXRI (query XRI) including Authority String, Path String, and Query String	xs:anyURI	Required	N/A	Authority Resolution (except Path String which is used in Service Endpoint Selection)	8.1.1
Resolution Output Format	xs:string (media type)	Optional	Null	Authority Resolution	8.1.2
Service Type	xs:anyURI	Optional	Null	Service Endpoint Selection	8.1.3
Service Media Type	xs:string (media type)	Optional	Null	Service Endpoint Selection	8.1.4

1035

Table 8: Input parameters for XRI resolution.


1036  
1037

The following general rules apply to all input parameters as well as to all XRD elements throughout this specification:

1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048

1. The presence of an input parameter, subparameter, or XRD element with an empty value MUST be treated as equivalent to the absence of that input parameter, subparameter, or XRD element. (Note that this rule does not apply to XRD attributes.)
2. From a programmatic standpoint, both conditions above MUST be considered as equivalent to setting the value of that parameter, subparameter, or element to null.
3. In an XRD element, an attribute with an empty value is an error and MUST NOT be interpreted as the default value or any other value of that attribute.
4. As required by **[XMLSchema2]**, for all Boolean subparameters: a) the string values `true` and `false` MUST be considered case-insensitive (lowercase is RECOMMENDED), b) the values `true` and `1` MUST be considered equivalent, b) the values `false` and `0` MUST be considered equivalent.

1049 Figure 3 is a flowchart (non-normative) illustrating the processing of input parameters.

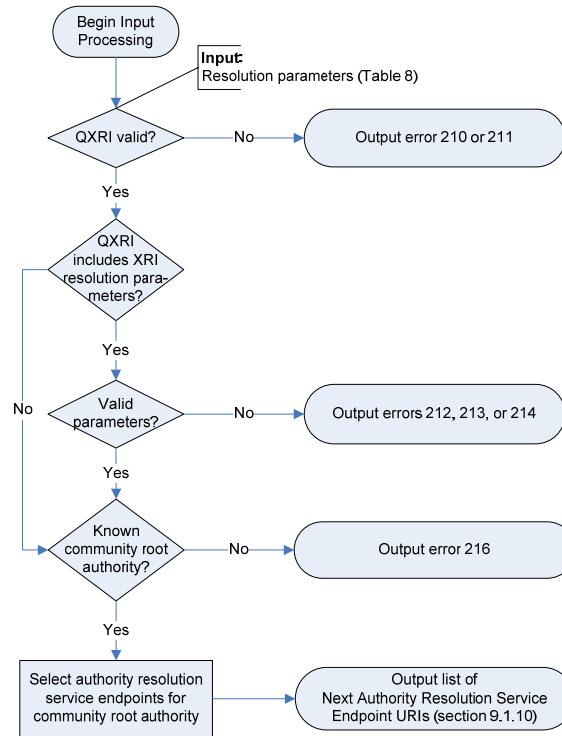

1050

1051 *Figure 3: Input processing flowchart.*

1052 The following sections specify additional validation and usage requirements that apply to  
1053 particular input parameters.

1054 **8.1.1 QXRI (Authority String, Path String, and Query String)**

1055 The QXRI (query XRI) is the only REQUIRED input parameter. Per [XRISyntax], a QXRI consists  
 1056 of three logical subparameters as defined in Table 9.

Logical Parameter Name	Type	Required/Optional	Value
Authority String	xs:string	Required	Contents of the authority component of the QXRI, NOT including the XRI scheme name or leading double forward slashes ("/") or a terminating single forward slash ("/").
Path String	xs:string	Optional	Contents of the path component of the QXRI, NOT including the leading single forward slash ("/") or terminating delimiter (such as "/", "?", "#", whitespace, or CRLF). If the path component is absent or empty, the value is null.
Query String	xs:string	Optional	Contents of the query component of the QXRI, NOT including leading question mark ("?") or terminating delimiter (such as "#", white space, or CRLF). If the query component is absent or empty, the value is null.

1057 *Table 9: Subparameters of the QXRI input parameter.*

1058 The fourth possible component of a QXRI—a fragment—is by definition resolved locally relative  
 1059 to the target resource identified by the combination of the Authority, Path, and Query  
 1060 components, and as such does not play a role in XRI resolution.

1061 Following are the constraints on the value of the QXRI parameter.

- 1062 1. It MUST be a valid absolute XRI according to the ABNF defined in [XRISyntax]. To  
 1063 resolve a relative XRI reference, it must be converted into an absolute XRI using the  
 1064 procedure defined in section 2.4 of [XRISyntax].
- 1065 2. For authority or proxy resolution as defined in this specification, the QXRI MUST be in  
 1066 URI-normal form as defined in section 2.3.1 of [XRISyntax]. A local resolver API MAY  
 1067 support the input of other XRI forms but SHOULD document the normal form(s) it  
 1068 supports and its normalization policies.
- 1069 3. When a QXRI is included as part of an HXRI (section 11.2) for XRI proxy resolution, the  
 1070 QXRI MUST be normalized as specified in section 11.2, and all HXRI query parameters  
 1071 MUST follow the encoding rules specified in sections 11.3 and 11.4.

1072 **8.1.2 Resolution Output Format**

1073 The Resolution Output Format is an OPTIONAL parameter that, together with its subparameters,  
 1074 is used to specify:

- 1075 • The media type for the resolution response.
- 1076 • Whether generic or trusted resolution must be used by the resolver.
- 1077 • Whether Refs should be followed during resolution.
- 1078 • Whether CanonicalID verification should not be performed during resolution.
- 1079 • Whether service endpoint selection should be performed on the final XRD.

- 1080 • Whether default matches should be ignored during service endpoint selection.
- 1081 • Whether URIs should automatically be constructed in the final XRD.

1082 Following are the normative requirements for the use of this parameter.

- 1083 1. The Resolution Output Format MUST be one of the values specified in Table 5 and MAY  
1084 include any of the subparameters specified in Table 6.
- 1085 2. If the value of the `https` subparameter is TRUE, the resolver MUST use the HTTPS  
1086 trusted authority resolution protocol specified in section 10.1 (or return an error indicating  
1087 this is not supported).
- 1088 3. If the value of the `saml` subparameter is TRUE, the resolver MUST use the SAML trusted  
1089 authority resolution protocol specified in section 10.2 (or return an error indicating this is  
1090 not supported).
- 1091 4. If the value of both the `https` and `saml` subparameters are TRUE, the resolver MUST  
1092 use the HTTPS+SAML trusted authority resolution protocol specified in section 10.3 (or  
1093 return an error indicating this is not supported).
- 1094 5. If the value of the `cid` subparameter is TRUE or null, or if the parameter is absent, the  
1095 resolver MUST perform CanonicalID verification as specified in section 14.3. If the value  
1096 of the `cid` subparameter is FALSE, the resolver MUST NOT perform CanonicalID  
1097 verification.
- 1098 6. If the value of the `refs` subparameter is TRUE or null, or if the parameter is absent, the  
1099 resolver MUST perform Ref processing as specified in section 12. If the value of the  
1100 `refs` subparameter is FALSE, the resolver MUST NOT perform Ref processing and  
1101 must return an error if a Ref is encountered as specified in section 12.
- 1102 7. If the value of the `sep` subparameter is TRUE, the resolver MUST perform service  
1103 endpoint selection on the final XRD (even if the values of all service endpoint selection  
1104 parameters are null). If the value of the `sep` subparameter is FALSE or null, or if the  
1105 parameter is absent, the resolver MUST NOT perform service endpoint selection on the  
1106 final XRD unless it is required to produce a URI List or HTTP(S) redirect. See section 8.2.
- 1107 8. If the value of the `nodefault_t`, `nodefault_p`, or `nodefault_m` subparameter is  
1108 TRUE, the resolver MUST ignore default matches on the corresponding service endpoint  
1109 selection element categories as specified in section 13.3.2.
- 1110 9. If the value of the `uric` subparameter is TRUE, the resolver MUST perform service  
1111 endpoint URI construction as specified in section 13.7.1. If the value of the `uric`  
1112 subparameter is FALSE or null, or if the parameter is absent, the resolver MUST NOT  
1113 perform service endpoint URI construction.

1114 Future versions of this specification, or other specifications for XRI resolution, MAY use other  
1115 values for Resolution Output Format or its subparameters.

### 1116 8.1.3 Service Type

1117 The Service Type is an OPTIONAL value of type `xs:anyURI` used to request a specific type of  
1118 service in the service endpoint selection phase (section 11). The value of this parameter MUST  
1119 be a valid absolute XRI, IRI, or URI in URI-normal form as defined by **[XRISyntax]**. (Note that  
1120 URI-normal form is required so this parameter may be passed to a proxy resolver in a QXRI  
1121 query parameter as defined in section 11.) The Service Type values defined for XRI resolution  
1122 services are specified in section 3.1.2. The rules for matching the value of the Service Type  
1123 parameter to the value of the `xrd:XRD/xrd:Service/xrd:Type` element are specified in  
1124 section 13.3.6.

1125 **8.1.4 Service Media Type**

1126 The Service Media Type is an OPTIONAL string used to request a specific media type in the  
1127 service endpoint selection phase (section 11). The value of this parameter MUST be a valid  
1128 media type as defined by [RFC2046]. The Service Media Type values defined for XRI resolution  
1129 services are specified in section 3.3. The rules for matching the value of the Service Media Type  
1130 parameter to the value of the `xrd:XRD/xrd:Service/xrd:MediaType` element are specified  
1131 in section 13.3.8.


1132 **8.2 Outputs**

1133 Table 10 summarizes the logical outputs of XRI resolution. Note that these are defined in terms of  
1134 media types returned by authority servers and proxy resolvers. A local resolver API MAY  
1135 implement other representations of these media types.

Logical Output Format Name	Media Type Value (when requesting XRI authority resolution only)	Media Type Value (when requesting service endpoint selection)
XRDS Document	application/xrds+xml	application/xrds+xml;sep=true
XRD Element	application/xrd+xml	application/xrd+xml;sep=true
URI List	N/A	text/uri-list
HTTP(S) Redirect	N/A	<i>null</i>

1136 *Table 10: Outputs of XRI resolution.*

1137 Figure 4 is a flowchart illustrating the process of producing these output formats once the auth-  
 1138 ority resolution and optional service endpoint selection phases are complete. Note that in the first  
 1139 two output options, errors are reported directly in the XRDS, so no special error format is needed.

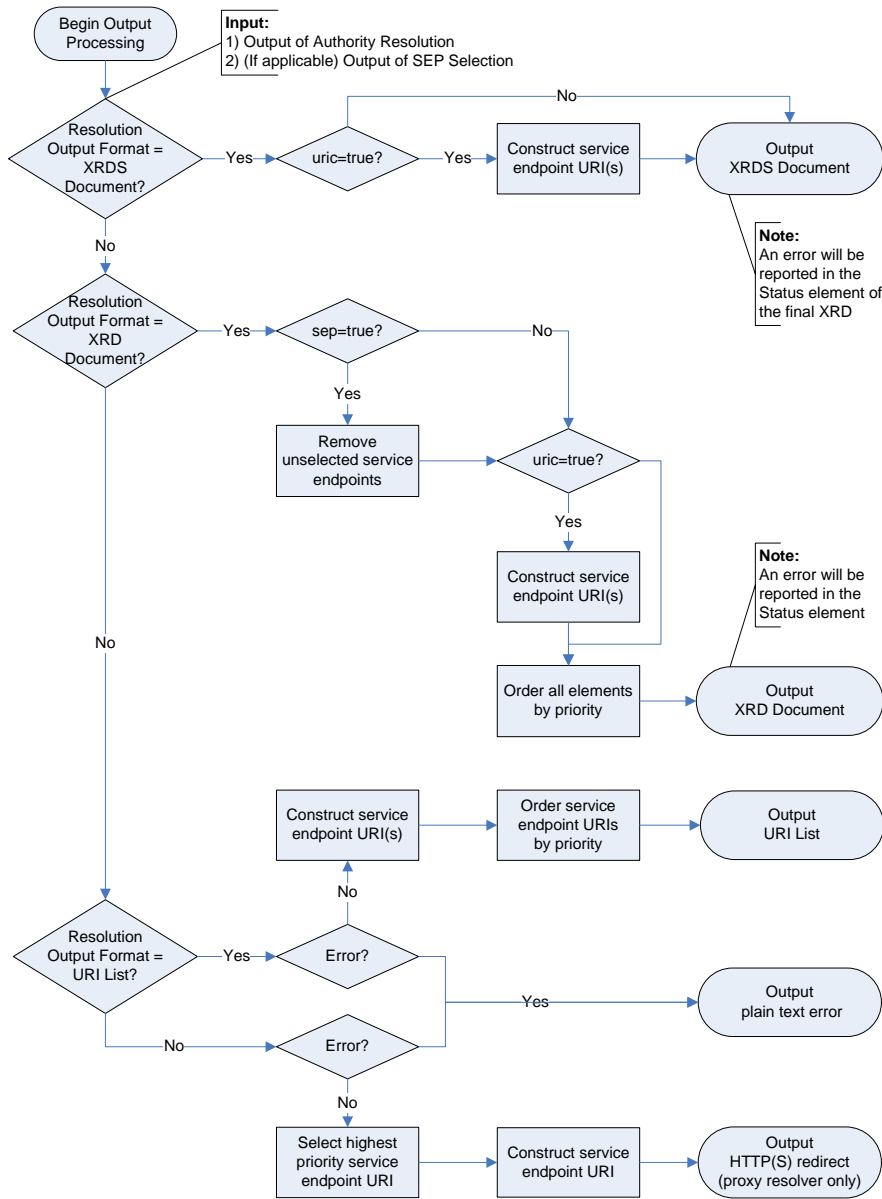

1140  
 1141 *Figure 4: Output processing flowchart.*

1142 The following sections provide additional construction and validation requirements.

## 1143 8.2.1 XRDS Document

1144 If the value of the Resolution Output Format parameter is `application/xrds+xml`, the  
1145 following rules apply.

- 1146 1. The output MUST be a valid XRDS document according to the schema defined in  
1147 Appendix B.
- 1148 2. The XRDS document MUST contain an ordered list of `xrd:XRD` elements—one for each  
1149 authority subsegment successfully resolved by the resolver client. This list MUST appear  
1150 in the same order as the corresponding subsegments in the Authority String.
- 1151 3. Each of the contained XRD elements must be a valid XRD element according to the  
1152 schema defined in Appendix B.
- 1153 4. The XRD elements MUST conform to the additional requirements in section 4.
- 1154 5. If the value of the `saml` subparameter of the Resolution Output Format is TRUE, the  
1155 XRD elements MUST conform to the additional requirements in section 10.2.
- 1156 6. If Redirect or Ref processing is necessary during the authority resolution or service  
1157 endpoint selection process, it MUST result in a valid nested XRDS document as defined  
1158 in section 12.
- 1159 7. If the value of the `sep` subparameter is TRUE, service endpoint selection MUST be  
1160 performed as defined in section 13, even if the values of all three service endpoint  
1161 selection input parameters (Service Type, Path String, and Service Media Type) are null.

1162 **IMPORTANT:** No filtering of the final XRD is performed when returning an XRDS document.  
1163 Filtering is only performed when the requested Resolution Output Format is an XRD element –  
1164 see the next section.

- 1165 8. If the value of the `cid` subparameter is TRUE, synonym verification MUST be reported  
1166 using the `xrd:Status` element of each XRD in the XRDS document as defined in  
1167 section 14.
- 1168 9. If the output is an error, this error MUST be returned using the `xrd:Status` element of  
1169 the final XRD in the XRDS document as defined in section 15.

## 1170 8.2.2 XRD Element

1171 If the value of the Resolution Output Format parameter is `application/xrd+xml`, the following  
1172 rules apply.

- 1173 1. The output MUST be a valid XRD element according to the schema defined in Appendix  
1174 B.
- 1175 2. The XRD elements MUST conform to the additional requirements in section 4.
- 1176 3. If the value of the `saml` subparameter of the Resolution Output Format is TRUE, the  
1177 XRD element MUST conform to the additional requirements in section 10.2.
- 1178 4. If the value of the `sep` subparameter is FALSE or null, or if this parameter is absent, the  
1179 XRD MUST be the final XRD in the XRDS document produced as a result of authority  
1180 resolution. Service endpoint selection or any other filtering of the XRD element MUST  
1181 NOT be performed.
- 1182 5. If the value of the `sep` subparameter is TRUE, service endpoint selection MUST be  
1183 performed as defined in section 13, even if the values of all service endpoint selection  
1184 input parameters are null.
- 1185 6. If service endpoint selection is performed, the only `xrd:Service` elements in the XRD  
1186 element MUST be those selected according to the rules specified in section 13. If no  
1187 service endpoints were selected by those rules, no `xrd:Service` elements will be

1188 present. In addition, all elements within the XRD element that are subject to the global  
1189 `priority` attribute (even if the attribute is absent or null) MUST be returned in order of  
1190 highest to lowest priority as defined in section 4.3.3.

1191 **IMPORTANT:** Any other filtering of the XRD element MUST NOT be performed. Note that this  
1192 means that if the XRD element includes a SAML signature element as defined in section 10.2,  
1193 this element is still returned inside the XRD element even though it may not be able to be verified  
1194 by a consuming application.

- 1195 7. If the value of the `cid` subparameter is TRUE, synonym verification MUST be reported  
1196 using the `xrd:Status` element of each XRD in the XRDS document as defined in  
1197 section 14.
- 1198 8. If the output is an error, this error MUST be returned using the `xrd:Status` element as  
1199 defined in section 15.

### 1200 8.2.3 URI List

1201 If the value of the Resolution Output Format parameter is `text/uri-list`, the following rules  
1202 apply.

- 1203 1. For this output, service endpoint selection is REQUIRED, even if the values of all service  
1204 endpoint selection input parameters are null.
- 1205 2. If authority resolution and service endpoint selection are both successful, the output  
1206 MUST be a valid URI List as defined by section 5 of [RFC2483].
- 1207 3. If, after applying the service endpoint selection rules, more than one service endpoint is  
1208 selected, the highest priority `xrd:XRD/xrd:Service` element MUST be selected as  
1209 defined in section 4.3.3.
- 1210 4. If the final selected `xrd:XRD/xrd:Service` element contains a  
1211 `xrd:XRD/xrd:Service/xrd:Redirect` or `xrd:XRD/xrd:Service/xrd:Ref`  
1212 element, Redirect and Ref processing MUST be performed as described in section 12.  
1213 This rule applies iteratively to each new XRDS document resolved.
- 1214 5. From the final selected `xrd:XRD/xrd:Service` element, the service endpoint URI(s)  
1215 MUST be constructed as defined in section 13.7.1.
- 1216 6. The URIs MUST be returned in order of highest to lowest priority of the source `xrd:URI`  
1217 elements within the selected `xrd:Service` element as defined in section 4.3.3. When  
1218 two or more of the source `xrd:URI` elements have equal priority, their constructed URIs  
1219 SHOULD be returned in random order.

1220 **IMPORTANT:** Any other filtering of the URI list MUST NOT be performed.

- 1221 7. If the output is an error, it MUST be returned with the content type `text/plain` as  
1222 defined in section 15.

### 1223 8.2.4 HTTP(S) Redirect

1224 In XRI proxy resolution, the Resolution Output Format parameter may be null. In this case the  
1225 output of a proxy resolver is an HTTP(S) redirect as defined in section 11.7.



1226

## 9 Generic Authority Resolution Service

1227  
1228  
1229  
1230

As discussed in section 1.1 and illustrated in Figure 2, authority resolution is the first phase of XRI resolution. This phase applies only to resolving the subsegments in the Authority String of the QXRI. The Authority String may identify either an *XRI authority* or an *IRI authority* as described in section 2.2.1 of [XRISyntax].

1231  
1232  
1233  
1234  
1235

XRI authorities and IRI authorities have different syntactic structures, partially due to the higher level of abstraction represented by XRI authorities. For this reason, XRI authorities are resolved to XRDS documents one subsegment at a time as specified in section 9.1. IRI authorities, since they are based on DNS names or IP addresses, are resolved into an XRDS document through a special HTTP(S) request using the entire IRI authority component as specified in section 9.1.11.

1236

### 9.1 XRI Authority Resolution

1237

#### 9.1.1 Service Type and Service Media Type

1238

The protocol defined in this section is identified by the values in Table 11.

Service Type	Service Media Type	Subparameters
xri://\$res*auth*(\$v*2.0)	application/xrds+xml	OPTIONAL (see important note below)

1239

Table 11: Service Type and Service Media Type values for generic authority resolution.

1240  
1241

A generic authority resolution service endpoint advertised in an XRDS document MUST use the Service Type identifier and MAY use the Service Media Type identifier defined in Table 11.

1242  
1243  
1244  
1245  
1246


**BACKWARDS COMPATIBILITY NOTE:** Earlier drafts of this specification used a subparameter called `trust`. This has been deprecated in favor of new subparameters for each trusted resolution option, i.e., `https=true` and `saml=true`. However, implementations SHOULD consider the following values equivalent both for the purpose of service endpoint selection within XRDS documents and as HTTP(S) Accept header values in XRI authority resolution requests:

1247  
1248  
1249  
1250  
1251  
1252

```
application/xrds+xml
application/xrds+xml;trust=none
application/xrds+xml;https=false
application/xrds+xml;saml=false
application/xrds+xml;https=false;saml=false
application/xrds+xml;saml=false;https=false
```

1253 **9.1.2 Protocol**

1254 Figure 5 (non-normative) illustrates the overall logical flow of generic authority resolution.

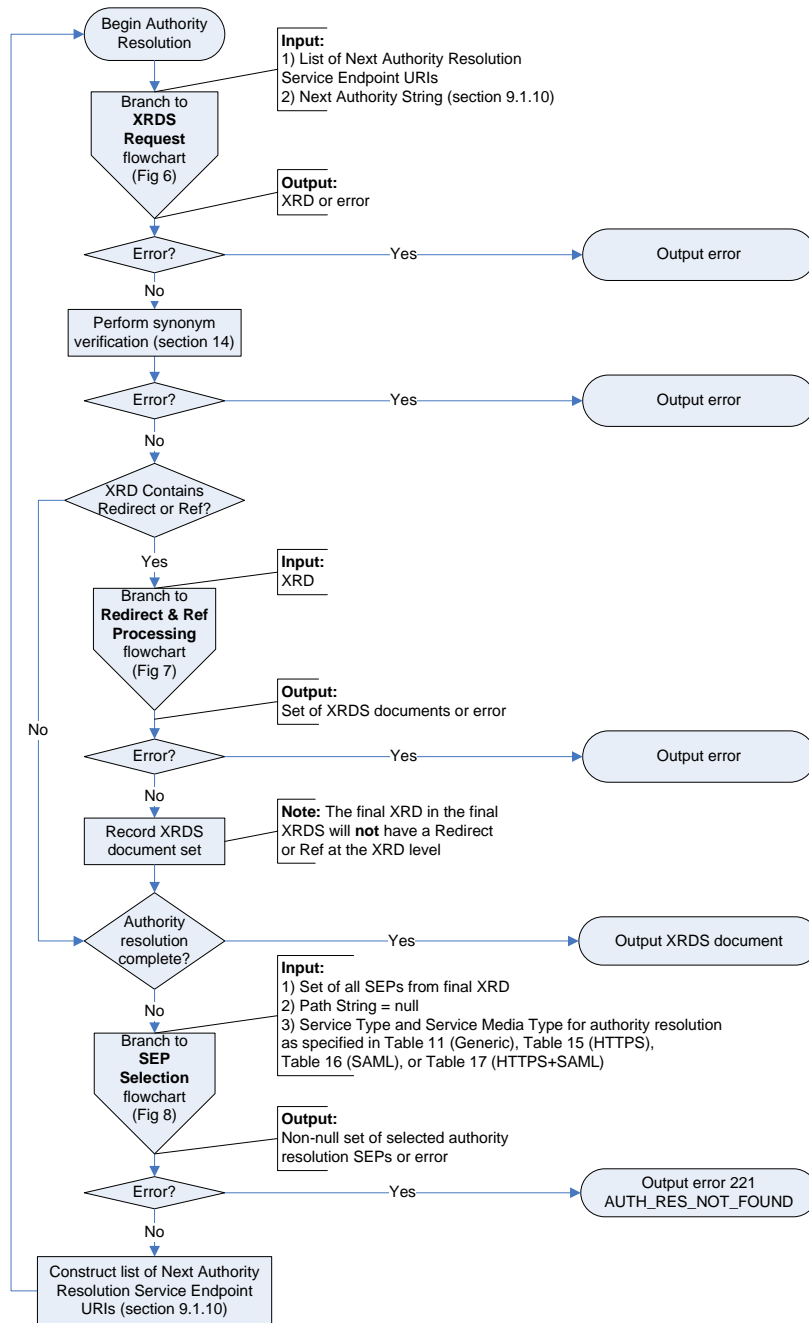


1255

1256 *Figure 5: Authority resolution flowchart.*

- 1257 Following are the normative requirements for behavior of an XRI resolver and an XRI authority  
1258 server when performing generic XRI authority resolution:
- 1259 1. Each request for an XRDS document using HTTP(S) MUST conform to the requirements  
1260 in section 9.1.3.
  - 1261 2. For errors in XRDS document resolution requests, a resolver MUST implement failover  
1262 handling as specified in section 9.1.4.
  - 1263 3. The resolver MUST be preconfigured with or have a means of obtaining the XRDS  
1264 document describing the community root authority for the XRI to be resolved as defined  
1265 in section 9.1.5.
  - 1266 4. The resolver MAY obtain the XRDS document describing the community root authority by  
1267 requesting a self-describing XRDS document as defined in section 9.1.6.
  - 1268 5. Resolution of each subsegment in the Authority String after the community root  
1269 subsegment MUST proceed in subsegment order (left-to-right) using fully qualified  
1270 subsegment values as defined in section 9.1.7.
  - 1271 6. Subsegments that use XRI parenthetical cross-reference syntax MUST be resolved as  
1272 defined in section 9.1.8.
  - 1273 7. For each iteration of the authority resolution process, the next authority resolution service  
1274 endpoint MUST be selected as specified in section 9.1.9.
  - 1275 8. For each iteration of the authority resolution process, an HTTP(S) URI called the Next  
1276 Authority URI MUST be constructed according to the algorithm specified in section  
1277 9.1.10.
  - 1278 9. A resolver MAY request that a recursing authority server perform resolution of multiple  
1279 subsegments as defined in section 9.1.11.
  - 1280 10. For each iteration of the authority resolution process, a resolver MUST perform Redirect  
1281 and Ref processing as specified in section 12. Note that if Redirect and Ref processing is  
1282 successful, it will result in a nested XRDS document as specified in section 12.5.

1283 **9.1.3 Requesting an XRDS Document using HTTP(S)**

1284 Figure 6 (non-normative) illustrates the logical flow for requesting an XRDS document.

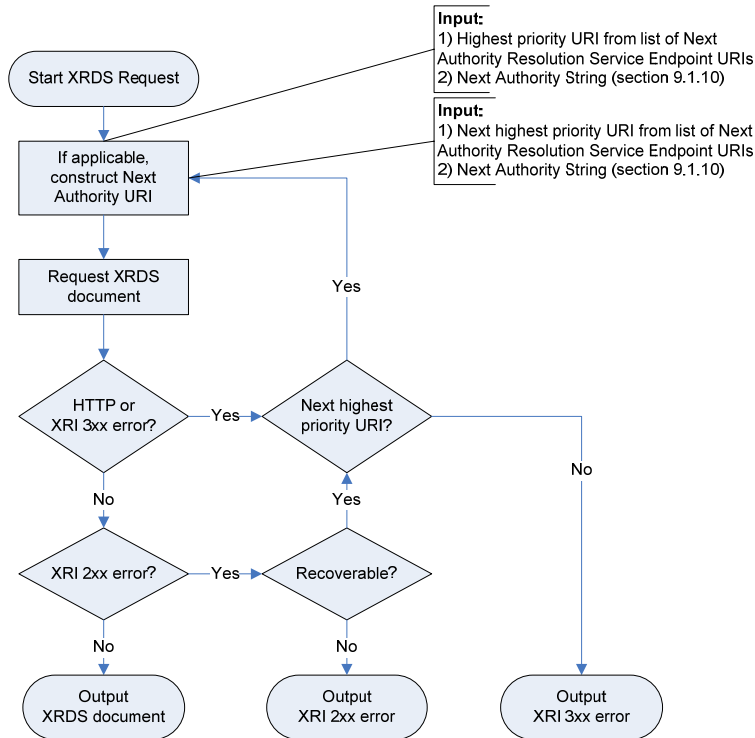

1285  
 1286 *Figure 6: XRDS request flowchart.*

1287 Following are the normative requirements for an XRI resolver and an XRI authority server when  
 1288 requesting an XRDS document:

- 1289 1. Each resolution request **MUST** be an HTTP(S) GET to the Next Authority URI and **MUST**  
 1290 contain an Accept header with the media type identifier defined in Table 11. Note that in  
 1291 XRI authority resolution, this Accept header is **NOT** interpreted as an XRI resolution input  
 1292 parameter, but simply as the media type being requested from the server. This differs  
 1293 from XRI proxy resolution, where the Accept header **MAY** be used to specify the Service  
 1294 Media Type resolution parameter. See section 11.5.
- 1295 2. The ultimate HTTP(S) response from an authority server to a successful resolution  
 1296 request **MUST** contain either: a) a 2XX response with a valid XRDS document containing  
 1297 an XRD element for each authority subsegment resolved, or b) a 304 response signifying  
 1298 that the cached version on the resolver is still valid (depending on the client's HTTP(S)  
 1299 request). There is no restriction on intermediate redirects (i.e., 3XX result codes) or other  
 1300 result codes (e.g., a 100 HTTP response) that eventually result in a 2XX or 304 response  
 1301 through normal operation of [RFC2616].
- 1302 3. The HTTP(S) response from an authority server **MUST** return the media type requested  
 1303 by the resolver. The response **SHOULD NOT** include any subparameters supplied by the  
 1304 resolver in the request. If the resolver receives such parameters in the response, the  
 1305 resolver **MUST** ignore them and do its own independent verification that the response  
 1306 fulfills the requested parameters.

- 1307 4. Any ultimate response besides an HTTP 2XX or 304 SHOULD be considered an error in  
1308 the resolution process. In this case, the resolver MUST implement failover handling as  
1309 specified in section 9.1.4.
- 1310 5. If all authority resolution service endpoints fail, the resolver SHOULD return the  
1311 appropriate error code and context message as specified in section 15. In recursing  
1312 resolution, such an error MUST be returned by the recursing authority server to the  
1313 resolver as specified in section 15.4.
- 1314 6. All other uses of HTTP(S) in this protocol MUST comply with the requirements in section  
1315 16. In particular, HTTP caching semantics SHOULD be leveraged to the greatest extent  
1316 possible to maintain the efficiency and scalability of the HTTP-based resolution system.  
1317 The recommended use of HTTP caching headers is described in more detail in section  
1318 16.2.1.

#### 1319 9.1.4 Failover Handling

1320 XRI infrastructure has the same requirements as DNS infrastructure for stability, redundancy, and  
1321 network performance. This means XRI authority and proxy resolution services are subject to the  
1322 same requirements as DNS nameservers. For example:

- 1323 • Critical authority or proxy resolution servers SHOULD be operated from a minimum of two  
1324 physically separate network locations to prevent a single point of failure.
- 1325 • Authority or proxy resolution servers handling heavy loads SHOULD operate from multiple  
1326 servers and take advantage of load balancing technologies.

1327 However, such capabilities are effective only if resolvers or other client applications implement  
1328 proper failover handling. Because XRI resolution takes place at a layer above DNS resolution,  
1329 resolvers have two ways to discover additional network endpoints at which authority or proxy  
1330 resolution services are available.

- 1331 • *DNS round robin/failover*: The domain name of an authority resolution service endpoint URI  
1332 may be associated with more than one IP address.
- 1333 • *XRI round robin/failover*: The XRDS document describing an XRI authority may publish  
1334 multiple URI elements for its authority resolution service endpoint, or multiple authority  
1335 resolution service endpoints, or both.

1336 To take advantage of both these options, the following rules apply to failover handling:

- 1337 1. A resolver SHOULD first try an alternate IP address for the current authority resolution  
1338 service endpoint if the endpoint uses DNS round robin.
- 1339 2. If all alternate IP addresses fail, a resolver MUST try the next highest priority authority  
1340 resolution URI in the current authority resolution service endpoint, if available.
- 1341 3. If all URIs in the current authority resolution service endpoint fail, a resolver MUST try the  
1342 next highest priority authority resolution service endpoint, if available, until all authority  
1343 resolution service endpoints are exhausted.
- 1344 4. A resolver SHOULD only return an error if all network endpoints associated with the  
1345 authority resolution service fail to respond.

1346 **IMPORTANT:** These rules also apply to any client of an XRI proxy resolver. Failure to observe  
1347 this warning means the proxy resolver can become a point of failure.

1348 One final consideration: DNS caching mechanisms should respect the TTL (Time To Live)  
1349 settings in DNS records. However, different software languages and frameworks handle DNS  
1350 caching differently. It is RECOMMENDED to check the default settings to ensure that a library or  
1351 application is not caching DNS results indefinitely.

## 1352 9.1.5 Community Root Authorities

1353 Identifier management policies are defined on a community-by-community basis. For XRI  
1354 identifier authorities, the resolution community is specified by the first (leftmost) subsegment of  
1355 the authority component of the XRI. This is referred to as the *community root authority*, and it  
1356 represents the authority server(s) that answer resolution queries at this root. When a resolution  
1357 community chooses to create a new community root authority, it SHOULD define policies for  
1358 assigning and managing identifiers under this authority. Furthermore, it SHOULD define what  
1359 resolution protocol(s) may be used for these identifiers.

1360 For an XRI authority, the community root may be either a global context symbol (GCS) character  
1361 or top-level cross-reference as specified in section 2.2.1.1 of [XRISyntax]. In either case, the  
1362 corresponding root XRDS document (or its equivalent) specifies the top-level authority resolution  
1363 service endpoints for that community.

1364 The community root authority SHOULD publish a self-describing XRDS document as defined in  
1365 section 9.1.6. This XRDS document SHOULD be available at the HTTP(S) URI(s) that serve as  
1366 the community's root authority resolution service endpoints. This community root XRDS  
1367 document, or its location, must be known *a priori* and is part of the configuration of an XRI  
1368 resolver, similar to the specification of root DNS servers for a DNS resolver. Note that it is not  
1369 strictly necessary to publish this information in an XRDS document—it may be supplied in any  
1370 format that enables configuration of the XRI resolvers in the community. However, publishing a  
1371 self-describing XRDS document at a known location simplifies this process and enables dynamic  
1372 configuration of community resolvers.

1373 As a best practice, it is RECOMMENDED that community root XRDS document contain:

- 1374 • The root HTTPS resolution service endpoint(s) if HTTPS trusted resolution is supported.
- 1375 • A valid self-signed SAML assertion accessible via HTTPS or other secure means if SAML  
1376 trusted resolution is supported.
- 1377 • Both of the above if HTTPS+SAML trusted resolution is supported.
- 1378 • The service endpoints and supported media types of the community's XRI proxy resolver(s) if  
1379 proxy resolution is supported.

1380 For a list of public community root authorities and the locations of their community root XRDS  
1381 documents, see the Wikipedia entry on XRI [WikipediaXRI].

## 1382 9.1.6 Self-Describing XRDS Documents

1383 An identifier authority MAY publish a self-describing XRDS document, i.e., one produced by the  
1384 same identifier authority that it describes. A resolver MAY request a self-describing XRDS  
1385 document from a target identifier authority using either of two methods:

- 1386 1. If the resolver knows an HTTP(S) URI for the target authority's XRI authority resolution  
1387 service endpoint, it may use the resolution protocol specified in section 6 to request an  
1388 XRDS document directly from this HTTP(S) URI. This HTTP(S) URI may be known a  
1389 priori (as is often the case with community root authorities, above), or it may be  
1390 discovered from other identifier authorities via the resolution protocols defined in this  
1391 specification.
- 1392 2. If the resolver knows: a) an XRI of the target authority as a community root authority, and  
1393 b) an HTTP(S) URI for a proxy resolver configured for this community root authority, it  
1394 may use the proxy resolution protocol specified in section 11 to query the proxy resolver  
1395 for the community root authority XRI. This query MUST include only a single subsegment  
1396 identifying the community root authority and MUST NOT include any additional  
1397 subsegments.

1398 If an identifier authority had an authority resolution service endpoint at  
1399 `http://example.com/auth-res-service/`, an example of the first method would be to

1400 issue an HTTP(S) GET request to that URI with an Accept header specifying the content type  
 1401 `application/xrds+xml`. See section 6.3 for more details.

1402 If an identifier authority with the community root authority identifier `xri://(example)` was  
 1403 registered with the XRI proxy resolver `http://xri.example.com/`, an example of the second  
 1404 method would be to issue an HTTP(S) GET request to the following URI:

1405 `http://xri.example.com/(example)?_xrd_r=application/xrds+xml`

1406 Note that a proxy resolver may use the first method to publish its own self-describing XRDS  
 1407 document at the HTTP(S) URI(s) for its proxy resolution service.

1408 **IMPORTANT:** A self-describing XRDS document **MUST** only be issued by an identifier authority  
 1409 when describing itself. It **MUST NOT** be included in an XRDS document when describing a  
 1410 different identifier authority. In the latter case the self-describing XRDS document for the  
 1411 community root authority is implicit.

### 1412 9.1.7 Qualified Subsegments

1413 A qualified subsegment is defined by the productions whose names start with `xri-subseg` in  
 1414 section 2.2.3 of **[XRISyntax]** including the leading syntactic delimiter (“\*” or “!”). A qualified  
 1415 subsegment **MUST** include the leading syntactic delimiter even if it was optionally omitted in the  
 1416 original XRI (see section 2.2.3 of **[XRISyntax]**).

1417 If the first subsegment of an XRI authority is a GCS character and the following subsegment does  
 1418 not begin with a “\*” (indicating a reassignable subsegment) or a “!” (indicating a persistent  
 1419 subsegment), then a “\*” is implied and **MUST** be added when constructing the qualified  
 1420 subsegment as specified in section 9.1.7. Table 12 and Table 13 illustrate the differences  
 1421 between parsing a reassignable subsegment following a GCS character and parsing a cross-  
 1422 reference, respectively.

1423

<b>XRI</b>	<code>xri://@example*internal/foo</code>
<b>XRI Authority</b>	<code>@example*internal</code>
<b>Community Root Authority</b>	<code>@</code>
<b>First Qualified Subsegment Resolved</b>	<code>*example</code>

1424 *Table 12: Parsing the first subsegment of an XRI that begins with a global context symbol.*

<b>XRI</b>	<code>xri://(http://www.example.com)*internal/foo</code>
<b>XRI Authority</b>	<code>(http://www.example.com)*internal</code>
<b>Community Root Authority</b>	<code>(http://www.example.com)</code>
<b>First Qualified Subsegment Resolved</b>	<code>*internal</code>

1425 *Table 13: Parsing the first subsegment of an XRI that begins with a cross-reference.*

## 1426 9.1.8 Cross-References

1427 Any subsegment within an XRI authority component may be a cross-reference (see section 2.2.2  
1428 of [XRISyntax]). Cross-references are resolved identically to any other subsegment because the  
1429 cross-reference is considered opaque, i.e., the value of the cross-reference (including the  
1430 parentheses) is the literal value of the subsegment for the purpose of resolution.

1431 Table 14 provides several examples of resolving cross-references. In these examples,  
1432 subsegment !b resolves to a Next Authority Resolution Service Endpoint URI of  
1433 `http://example.com/xri/` and recursing authority resolution is not being requested.  
1434

Example XRI	Next Authority URI after resolving
	<code>xri://@!a!b</code>
<code>xri://@!a!b!(@!1!2!3)*e/f</code>	<code>http://example.com/xri/!(@!1!2!3)</code>
<code>xri://@!a!b*(mailto:jd@example.com)*e/f</code>	<code>http://example.com/xri/(mailto:jd@example.com)</code>
<code>xri://@!a!b*(\$v/2.0)*e/f</code>	<code>http://example.com/xri/(\$v*2.0)</code>
<code>xri://@!a!b*(c*d)*e/f</code>	<code>http://example.com/xri/(c*d)</code>
<code>xri://@!a!b*(foo/bar)*e/f</code>	<code>http://example.com/xri/(foo%2Fbar)</code>

1435 Table 14: Examples of the Next Authority URIs constructed using different types of cross-references.

## 1436 9.1.9 Selection of the Next Authority Resolution Service Endpoint

1437 For each iteration of authority resolution, the resolver MUST select the next authority resolution  
1438 service endpoint from the current XRD as specified in section 13. For generic authority resolution,  
1439 this selection process MUST use the parameters specified in Table 11. For trusted authority  
1440 resolution, this selection process MUST use the parameters specified in Table 15, Table 16, or  
1441 Table 17. In all cases, an explicit match on the `xrd:XRD/xrd:Service/xrd:Type` element is  
1442 REQUIRED, so during authority resolution, a resolver MUST set the `nodefault` parameter to a  
1443 value of `nodefault=type` in order to override selection of a default service endpoint as  
1444 specified in section 13.3.2.

## 1445 9.1.10 Construction of the Next Authority URI

1446 Once the next authority resolution service endpoint is selected, the resolver MUST construct a  
1447 URI for the next HTTP(S) request, called the *Next Authority URI*, by concatenating two strings as  
1448 specified in this section.

1449 The first string is called the *Next Authority Resolution Service Endpoint URI*. To construct it, the  
1450 resolver MUST:

- 1451 1. Select the highest priority URI of the highest priority authority resolution service endpoint  
1452 selected in section 9.1.9.
- 1453 2. Apply the service endpoint URI construction algorithm based the value of the `append`  
1454 attribute as defined in section 13.7.
- 1455 3. Append a forward slash ("`/`") if the URI does not already end in a forward slash.

1456 The second string is called the *Next Authority String* and it consists of either:

- 1457 • The next fully qualified subsegment to be resolved (see section 9.1.7), or
- 1458 • In the case of recursing resolution, the next fully qualified subsegment to be resolved plus  
1459 any additional subsegments for which recursing resolution is requested (see section 9.1.11).

1460 The final step is to append the Next Authority String to the path component of the Next Authority  
1461 Resolution Service Endpoint URI. The resulting URI is called the *Next Authority URI*.



1462 Construction of the Next Authority URI is more formally described in this pseudocode for  
1463 resolving a “next-auth-string” via a “next-auth-res-sep-uri”:

```
1464 if (path portion of next-auth-res-sep-uri does not end in "/"):  
1465     append "/" to path portion of next-auth-res-sep-uri  
1466  
1467 if (next-auth-string is not preceded with "*" or "!" delimiter):  
1468     prepend "*" to next-auth-string  
1469  
1470 append uri-escape(next-auth-string) to path of next-auth-res-sep-uri
```

### 1471 9.1.11 Recursing Authority Resolution

1472 If an authority server offers recursing resolution, an XRI resolver MAY request resolution of  
1473 multiple authority subsegments in one transaction. If a resolver makes such a request, the  
1474 responding authority server MAY perform the additional recursing resolution steps requested. In  
1475 this case the recursing authority server acts as a resolver to the other authority resolution service  
1476 endpoints that need to be queried. Alternatively, the recursing authority server may retrieve XRDs  
1477 from its local cache until it reaches a subsegment whose XRD is not locally cached, or it may  
1478 simply recurse only as far as it is authoritative.

1479 If an authority server performs any recursing resolution, it MUST return an ordered list of  
1480 `xrd:XRDS` elements (and nested `xrd:XRDS` elements if Redirects or Refs are followed as  
1481 specified in section 12) in an `xrd:XRDS` document for all subsegments resolved as defined in  
1482 section 8.2.1.

1483 A recursing authority server MAY resolve fewer subsegments than requested by the resolver. The  
1484 recursing authority server is under no obligation to resolve more than the first subsegment (for  
1485 which it is, by definition, authoritative).

1486 If the recursing authority server does not resolve the entire set of subsegments requested, the  
1487 resolver MUST continue the authority resolution process itself. At any stage, however, the  
1488 resolver MAY request recursing resolution of any or all of the remaining authority subsegments.

## 1489 9.2 IRI Authority Resolution

1490 From the standpoint of generic authority resolution, an IRI authority component represents either  
1491 a DNS name or an IP address at which an XRDS document describing the authority may be  
1492 retrieved using HTTP(S). Thus IRI authority resolution simply involves making an HTTP(S) GET  
1493 request to a URI constructed from the IRI authority component. The resulting XRDS document  
1494 can then be consumed in the same manner as one obtained using XRI authority resolution.

1495 While the use of IRI authorities provides backwards compatibility with the large installed base of  
1496 DNS- and IP-identifiable resources, IRI authorities do not support the additional layer of  
1497 abstraction, delegation, and extensibility offered by XRI authority syntax. Therefore IRI authorities  
1498 are NOT RECOMMENDED for new deployments of XRI identifiers.

1499 This section defines IRI authority resolution as a simple extension to the XRI authority resolution  
1500 protocol defined in the preceding section.

### 1501 9.2.1 Service Type and Media Type

1502 Because IRI authority resolution takes place at a level “below” XRI authority resolution, it cannot  
1503 be described in an XRD, and thus there is no corresponding resolution service type. IRI authority  
1504 resolution uses the same media type as generic XRI authority resolution.

## 1505 9.2.2 Protocol

1506 Following are the normative requirements for IRI authority resolution that differ from generic XRI  
1507 authority resolution:

1508 1. The Next Authority URI (section 9.1.10) is constructed by extracting the entire IRI  
1509 authority component and prepending the string `http://`. See the exception in section  
1510 9.2.3.

1511 2. The HTTP GET request MUST include an HTTP Accept header containing only the  
1512 following:

```
1513 Accept: application/xrds+xml
```

1514 3. The HTTP GET request MUST have a `Host:` header (as defined in section 14.23 of  
1515 **[RFC2616]**) containing the value of the IRI authority component. For example:

```
1516 Host: example.com
```

1517 4. An HTTP server acting as an IRI authority SHOULD respond with an XRDS document  
1518 containing the XRD describing that authority.

1519 5. The responding server MUST use the value of the `Host:` header to populate the  
1520 `xrd:XRD/xrd:Query` element in the resulting XRD.

1521 Note that because IRI authority resolution is required to process the entire IRI authority  
1522 component in a single step, recursing authority resolution does not apply.

## 1523 9.2.3 Optional Use of HTTPS

1524 Section 10 of this specification defines trusted resolution only for XRI authorities. Trusted  
1525 resolution is not defined for IRI Authorities. If, however, an IRI authority is known to respond to  
1526 HTTPS requests (by some means outside the scope of this specification), then the resolver MAY  
1527 use HTTPS as the access protocol for retrieving the authority's XRD. If the resolver is satisfied,  
1528 via transport level security mechanisms, that the response is from the expected IRI authority, the  
1529 resolver MAY consider this an HTTPS trusted resolution response as defined in section 10.1.

## 1530 10 Trusted Authority Resolution Service

1531 This section defines three options for performing trusted XRI authority resolution as an extension  
1532 of the generic authority resolution protocol defined in section 9.1—one using HTTPS, one using  
1533 SAML assertions, and one using both.

### 1534 10.1 HTTPS

1535 HTTPS authority resolution is a simple extension to generic authority resolution in which all  
1536 communication with authority resolution service endpoints is carried out over HTTPS. This  
1537 provides transport-level security and server authentication, however it does not provide message-  
1538 level security or a means for a responder to provide different responses for different requestors.

#### 1539 10.1.1 Service Type and Service Media Type

1540 The protocol defined in this section is identified by the values in Table 15.

Service Type	Service Media Type	Subparameters
xri://\$res*auth*(\$v*2.0)	application/xrds+xml	https=true

1541 *Table 15: Service Type and Service Media Type values for HTTPS trusted authority resolution.*

1542 An HTTPS trusted resolution service endpoint advertised in an XRDS document MUST use the  
1543 Service Type identifier and Service Media Type identifier (including the `https=true` parameter)  
1544 defined in Table 15. In addition, the identifier authority MUST use an HTTPS URI as the value of  
1545 the `xrd:URI` element(s) for this service endpoint.

#### 1546 10.1.2 Protocol

1547 Following are the normative requirements for HTTPS trusted authority resolution that differ from  
1548 generic authority resolution (section 9.1):

- 1549 1. All authority resolution service endpoints MUST be selected using the values defined in  
1550 Table 15.
- 1551 2. All authority resolution requests, including the starting request to a community root  
1552 authority, MUST use the HTTPS protocol as defined in [RFC2818]. This includes all  
1553 intermediate redirects, as well as all authority resolution requests resulting from Redirect  
1554 and Ref processing as defined in section 12. A successful HTTPS response MUST be  
1555 received from each authority in the resolution chain or the output MUST be error.
- 1556 3. All authority resolution requests MUST contain an HTTPS Accept header with the media  
1557 type identifier defined in Table 15 (including the `https=true` subparameter).
- 1558 4. If the resolver finds that an authority in the resolution chain does not support HTTPS at  
1559 any of its authority resolution service endpoints, the resolver MUST return a 23x error as  
1560 defined in section 15.

## 1561 10.2 SAML

1562 In SAML trusted resolution, the resolver uses the Resolution Output Format subparameter  
1563 `saml=true` and the authority server responds with an XRDS document containing an XRD with  
1564 an additional element—a digitally signed SAML [SAML] assertion that asserts the validity of the  
1565 containing XRD. SAML trusted resolution provides message integrity but does not provide  
1566 confidentiality. For this reason is is RECOMMENDED to combine SAML trusted resolution with

1567 HTTPS trusted resolution as defined in section 10.3. Message confidentiality may also be  
1568 achieved with other security protocols used in conjunction with this specification. SAML trusted  
1569 resolution also does not provide a means for an authority to provide different responses for  
1570 different requestors; client authentication is explicitly out-of-scope for version 2.0 of XRI  
1571 resolution.

## 1572 10.2.1 Service Type and Service Media Type

1573 The protocol defined in this section is identified by the values in Table 16.

Service Type	Service Media Type	Subparameters
xri://\$res*auth*(\$v*2.0)	application/xrds+xml	saml=true

1574 *Table 16: Service Type and Service Media Type values for SAML trusted authority resolution.*

1575 A SAML trusted resolution service endpoint advertised in an XRDS document MUST use the  
1576 Service Type identifier and Service Media Type identifier defined in Table 16 (including the  
1577 `saml=true` subparameter). In addition, for transport security the identifier authority SHOULD  
1578 offer at least one HTTPS URI as the value of the `xrd:URI` element(s) for this service endpoint.

## 1579 10.2.2 Protocol

### 1580 10.2.2.1 Client Requirements

1581 For a resolver, trusted resolution is identical to the generic resolution protocol (section 9.1) with  
1582 the addition of the following requirements:

- 1583 1. All authority resolution service endpoints MUST be selected using the values defined in  
1584 Table 16. A resolver SHOULD NOT request SAML trusted resolution service from an  
1585 authority unless the authority advertises a resolution service endpoint matching these  
1586 values.
- 1587 2. Authority resolution requests MAY use either the HTTP or HTTPS protocol. The latter is  
1588 RECOMMENDED for confidentiality.
- 1589 3. All authority resolution requests MUST contain an HTTP(S) Accept header with the  
1590 media type identifier defined in Table 16 (including the `saml=true` subparameter). This  
1591 is the media type of the requested response.

1592 **IMPORTANT:** Clients willing to accept either generic or trusted responses MAY use a  
1593 combination of media type identifiers in the Accept header as described in section 14.1 of  
1594 [RFC2616]. Media type identifiers SHOULD be ordered according to the client's preference for  
1595 the media type of the response. If a client performing generic authority resolution receives an  
1596 XRD containing SAML elements, it MAY choose not to validate the signature or perform any  
1597 processing of these elements.

- 1598 4. A resolver MAY request recursing authority resolution of multiple subsegments as  
1599 defined in section 10.2.3.
- 1600 5. The resolver MUST individually validate each XRD it receives in the resolution chain  
1601 according to the rules defined in section 10.2.4. When `xrd:XRD` elements come both  
1602 from freshly-retrieved XRDS documents and from a local cache, a resolver MUST ensure  
1603 that these requirements are satisfied each time a resolution request is performed.

### 1604 10.2.2.2 Server Requirements

1605 For an authority server, trusted resolution is identical to the generic resolution protocol (section  
1606 9.1) with the addition of the following requirements:

- 1607 1. The HTTP(S) response to a trusted resolution request MUST include a content type of  
1608 `application/xrds+xml;saml=true`.
- 1609 2. The XRDS document returned by the resolution service MUST contain a  
1610 `saml:Assertion` element as an immediate child of the `xrd:XRD` element that is valid  
1611 per the processing rules described by [SAML].
- 1612 3. The `saml:Assertion` element MUST contain a valid enveloped digital signature as  
1613 defined by [XMLDSig] and as constrained by section 5.4 of [SAML].
- 1614 4. The signature MUST apply to the `xrd:XRD` element that contains the signed SAML  
1615 assertion. Specifically, the signature MUST contain a single  
1616 `ds:SignedInfo/ds:Reference` element, and the `URI` attribute of this reference  
1617 MUST refer to the `xrd:XRD` element that is the immediate parent of the signed SAML  
1618 assertion. The URI reference MUST NOT be empty and it MUST refer to the identifier  
1619 contained in the `xrd:XRD/@xml:id` attribute.
- 1620 5. [SAML] specifies that the digital signature enveloped by the SAML assertion MAY contain  
1621 a `ds:KeyInfo` element. If this element is included, it MUST describe the key used to  
1622 verify the digital signature element. However, because the signing key is known in  
1623 advance by the resolution client, the `ds:KeyInfo` element SHOULD be omitted from the  
1624 `ds:Signature` element of the SAML assertion.
- 1625 6. The `xrd:XRD/xrd:Query` element MUST be present, and the value of this field MUST  
1626 match the XRI authority subsegment requested by the client.
- 1627 7. The `xrd:XRD/xrd:ProviderID` element MUST be present and its value MUST match  
1628 the value of the `xrd:XRD/xrd:Service/xrd:ProviderID` element in an XRD  
1629 advertising availability of trusted resolution service from this authority as required in  
1630 section 10.2.5.
- 1631 8. The `xrd:XRD/saml:Assertion/saml:Subject/saml:NameID` element MUST be  
1632 present and equal to the `xrd:XRD/xrd:Query` element.
- 1633 9. The `NameQualifier` attribute of the  
1634 `xrd:XRD/saml:Assertion/saml:Subject/saml:NameID` element MUST be  
1635 present and MUST be equal to the `xrd:XRD/xrd:ProviderID` element.
- 1636 10. There MUST be exactly one `saml:AttributeStatement` present in the  
1637 `xrd:XRD/saml:Assertion` element. It MUST contain exactly one `saml:Attribute`  
1638 element with a `Name` attribute value of `xri://$xrd*($v*2.0)`. This  
1639 `saml:Attribute` element MUST contain exactly one `saml:AttributeValue`  
1640 element whose text value is a URI reference to the `xml:id` attribute of the `xrd:XRD`  
1641 element that is the immediate parent of the `saml:Assertion` element.

### 1642 10.2.3 Recursing Authority Resolution

1643 If a resolver requests trusted resolution of multiple authority subsegments (see section 9.1.8), a  
1644 recursing authority server SHOULD attempt to perform trusted resolution on behalf of the resolver  
1645 as described in this section. However, if the resolution service is not able to obtain trusted XRDS  
1646 for one or more additional recursing subsegments, it SHOULD return only the trusted XRDS it has  
1647 obtained and allow the resolver to continue.

## 1648 10.2.4 Client Validation of XRDs

1649 For each XRD returned as part of a trusted resolution request, the resolver MUST validate the  
1650 XRD according to the rules defined in this section.

- 1651 1. The `xrd:XRD/saml:Assertion` element MUST be present.
- 1652 2. This assertion MUST be valid per the processing rules described by [SAML].
- 1653 3. The `saml:Assertion` MUST contain a valid enveloped digital signature as defined by  
1654 [XMLDSig] and constrained by Section 5.4 of [SAML].
- 1655 4. The signature MUST apply to the `xrd:XRD` element containing the signed SAML  
1656 assertion. Specifically, the signature MUST contain a single  
1657 `ds:SignedInfo/ds:Reference` element, and the `URI` attribute of this reference  
1658 MUST refer to the `xml:id` attribute of the `xrd:XRD` element that is the immediate parent  
1659 of the signed SAML assertion.
- 1660 5. If the digital signature enveloped by the SAML assertion contains a `ds:KeyInfo`  
1661 element, the resolver MAY reject the signature if this key does not match the signer's  
1662 expected key as specified by the `ds:KeyInfo` element present in the XRD Descriptor  
1663 that was used to describe the current authority. See section 10.2.5.
- 1664 6. The value of the `xrd:XRD/xrd:Query` element MUST match the subsegment whose  
1665 resolution resulted in the current XRD.
- 1666 7. The value of the `xrd:XRD/xrd:ProviderID` element MUST match the value of the  
1667 `xrd:XRD/xrd:Service/xrd:ProviderID` element in any XRD advertising availability  
1668 of trusted resolution service from this authority as required in section 10.2.5.
- 1669 8. The value of the `xrd:XRD/xrd:ProviderID` element MUST match the value of the  
1670 `NameQualifier` attribute of the  
1671 `xrd:XRD/saml:Assertion/saml:Subject/saml:NameID` element.
- 1672 9. The value of the `xrd:XRD/xrd:Query` element MUST match the value of the  
1673 `xrd:XRD/saml:Assertion/saml:Subject/saml:NameID` element.
- 1674 10. There MUST exist exactly one  
1675 `xrd:XRD/saml:Assertion/saml:AttributeStatment` with exactly one  
1676 `saml:Attribute` element that has a `Name` attribute value of `xri://$xrd*($v*2.0)`.  
1677 This `saml:Attribute` element must have exactly one `saml:AttributeValue`  
1678 element whose text value is a URI reference to the `xml:id` attribute of the `xrd:XRD`  
1679 element that is the immediate parent of the signed SAML assertion.

1680 If any of the above requirements are not met for an XRD in the trusted resolution chain, the result  
1681 MUST NOT be considered a valid trusted resolution response as defined by this specification.  
1682 Note that this does not preclude a resolver from considering alternative resolution paths. For  
1683 example, if an XRD advertising SAML trusted resolution service has two or more  
1684 `xrd:XRD/xrd:Service/xrd:URI` elements and the response from one service endpoint fails  
1685 to meet the requirements above, the client MAY repeat the validation process using the second  
1686 URI. If the second URI passes the tests, it MUST be considered a trusted resolution response as  
1687 defined by this document and SAML trusted resolution may continue.

1688 If the above requirements are met, and the `code` attribute of the `xrd:XRD/xrd:ServerStatus`  
1689 element is 100 (SUCCESS), the resolver MUST add an `xrd:XRD/xrd:Status` element  
1690 reporting a status of 100 (SUCCESS) as specified in section 15. Note that this added element  
1691 MUST be disregarded if a consuming application wishes to verify the SAML signature itself. (If  
1692 necessary, the consuming application may request the XRDS document it wishes to verify directly  
1693 from the SAML authority resolution server.)

1694 If all SAML trusted resolution paths fail, the resolver MUST return the appropriate 23x trusted  
1695 resolution error as defined in section 15.

1696 **10.2.5 Correlation of ProviderID and KeyInfo Elements**

1697 Each XRI authority participating in SAML trusted authority resolution MUST be associated with at  
1698 least one unique persistent identifier expressed in the

1699 `xrd:XRD/xrd:Service/xrd:ProviderID` element of any XRD advertising trusted authority  
1700 resolution service. This ProviderID value MUST NOT ever be reassigned to another XRI  
1701 authority. While a ProviderID may be any valid URI that meets these requirements, it is  
1702 STRONGLY RECOMMENDED to use a persistent identifier such as a persistent XRI  
1703 **[XRI Syntax]** or a URN **[RFC2141]**.

1704 The purpose of ProviderIDs in XRI resolution is to enable resolvers to correlate the metadata in  
1705 an XRD advertising SAML trusted authority resolution service with the response received from a  
1706 SAML trusted resolution service endpoint. If the signed XRD response contains the same  
1707 ProviderID as the XRD used to advertise a service, and the resolver has reason to trust the  
1708 signature, the resolver can trust that the XRD response has not been maliciously replaced with  
1709 another XRD.

1710 There is no defined discovery process for the ProviderID for a community root authority; it must  
1711 be published in a self-describing XRDS document (or other equivalent description—see sections  
1712 9.1.5 and 9.1.6) and verified independently. Once the community root XRDS document is known,  
1713 the ProviderID for delegated XRI authorities within this community MAY be discovered using the  
1714 `xrd:XRD/xrd:Service/xrd:ProviderID` element of authority resolution service endpoints.  
1715 This trust mechanism MAY also be used for other services offered by an authority.

1716 In addition, the metadata necessary for SAML trusted authority resolution or other SAML **[SAML]**  
1717 interactions MAY be discovered using the `ds:KeyInfo` element (section 4.2.) Again, if this  
1718 element is present in an XRD advertising SAML authority resolution service (or any other  
1719 service), and the client has reason to trust this XRD, the client MAY use the associated  
1720 ProviderID to correlate the contents of this element with a signed response.

1721 To assist resolvers in using this key discovery mechanism, it is important that trusted authority  
1722 servers be configured to sign responses in such a way that the signature can be verified using the  
1723 correlated `ds:KeyInfo` element. For more information, see **[SAML]**.

1724 **10.3 HTTPS+SAML**

1725 **10.3.1 Service Type and Service Media Type**

1726 The protocol defined in this section is identified by the values in Table 17.

Service Type	Service Media Type	Subparameters
<code>xri://\$res*auth*(\$v*2.0)</code>	<code>application/xrds+xml</code>	<code>https=true</code> <code>saml=true</code>

1727 *Table 17: Service Type and Service Media Type values for HTTPS+SAML trusted authority resolution.*

1728 An HTTPS+SAML trusted resolution service endpoint advertised in an XRDS document MUST  
1729 use the Service Type identifier and Service Media Type identifier defined in Table 17 (including  
1730 the `https=true` and `saml=true` subparameters). In addition, the identifier authority MUST use  
1731 an HTTPS URI as the value of the `xrd:URI` element(s) for this service endpoint.

1732 **10.3.2 Protocol**

1733 Following are the normative requirements for HTTPS+SAML trusted authority resolution.

- 1734 1. All authority resolution service endpoints MUST be selected using the values defined in  
1735 Table 17.
- 1736 2. All authority resolution requests and responses, including the starting request to a  
1737 community root authority, MUST conform to both the requirements of the HTTPS trusted  
1738 resolution protocol defined in section 10.1 and the SAML trusted resolution protocol  
1739 defined in section 10.2.
- 1740 3. All authority resolution requests MUST contain an HTTPS Accept header with the media  
1741 type identifier defined in Table 17 (including both the `https=true` and `saml=true`  
1742 parameters). This MUST be interpreted as the value of the Resolution Output Format  
1743 input parameter.
- 1744 4. If the resolver finds that an authority in the resolution chain does not support both HTTPS  
1745 and SAML, the resolver MUST return a 23x error as defined in section 15.



1746

## 11 Proxy Resolution Service

1747

The preceding sections have defined XRI resolution as a set of logical functions. This section defines a mapping of these functions to an HTTP(S) interface for remote invocation. This mapping is based on a standard syntax for expressing an XRI as an HTTP URI, called an *HXRI*, as defined in section 11.2. HXRIs also enable XRI resolution input parameters to be encoded as query parameters in the HXRI.

1750

1751

Proxy resolution is useful for:

1752

- Offloading XRI resolution and service endpoint selection processing from a client to an HTTP(S) server.

1753

1754

- Optimizing XRD caching for a resolution community (a *caching proxy resolver*). Proxy resolvers SHOULD use caching to resolve the same QXRIs or QXRI components for multiple clients as defined in section 16.4.

1755

1756

- Returning HTTP(S) redirects to clients such as browsers that have no native understanding of XRIs but can process HXRIs. This provides backwards compatibility with the large installed base of existing HTTP clients.

1757

1758

1759

1760

### 11.1 Service Type and Media Types

1761

The protocol defined in this section is identified by the values in Table 18.

1762

Service Type	Service Media Types	Subparameters
xri://\$res*proxy*(\$v*2.0)	application/xrds+xml application/xrd+xml text/uri-list	All subparameters specified in Table 6

1763

Table 18: Service Type and Service Media Type values for proxy resolution.

1764

A proxy resolution service endpoint advertised in an XRDS document MUST use the Service Type identifier and Service Media Type identifiers defined in Table 18. In addition:

1765

1766

- An HTTPS proxy resolver MUST specify the media type parameter `https=true` and MUST offer at least one HTTPS URI as the value of the `xrd:URI` element(s) for this service endpoint.

1767

1768

1769

- A SAML proxy resolver MUST specify the media type parameter `saml=true` and SHOULD offer at least one HTTPS URI as the value of the `xrd:URI` element(s) for this service endpoint.

1770

1771

1772

It may appear to be of limited value to advertise proxy resolution service in an XRDS document if a resolver must already know how to perform local XRI resolution in order to retrieve this document. However, advertising a proxy resolution service in the XRDS document for a community root authority (sections 9.1.3 and 9.1.6) can be very useful for applications that need to consume XRI proxy resolution services or automatically generate HXRIs for resolution by non-XRI-aware clients in that community. Those applications may discover the current URI(s) and resolution capabilities of a proxy resolver from this source.

1773

1774

1775

1776

1777

1778

### 11.2 HXRIs

1779

1780

The first step in an HTTP binding of the XRI resolution interface is to specify how the QXRI parameter is passed within an HTTP(S) URI. Besides providing a binding for proxy resolution, defining a standard syntax for expressing an XRI as an HTTP XRI (HXRI) has two other benefits:

1781

1782

- 1783 • It allows XRIs to be used anywhere an HTTP URI can appear, including in Web pages,  
1784 electronic documents, email messages, instant messages, etc.
- 1785 • It allows XRI-aware processors and search agents to recognize an HXRI and extract the  
1786 embedded XRI for direct resolution, processing, and indexing.

1787 To make this syntax as simple as possible for XRI-aware processors or search agents to  
1788 recognize, an HXRI consists of a fully qualified HTTP or HTTPS URI authority component that  
1789 begins with the domain name segment "xri.". The QXRI is then appended as the entire local  
1790 path (and query component, if present). The QXRI MUST NOT include the xri:// prefix and  
1791 MUST be in URI-normal form as defined in [XRISyntax]. (If a proxy resolver receives an HXRI  
1792 containing a QXRI beginning with an xri:// prefix, it SHOULD remove it before continuing.) In  
1793 essence, the proxy resolver URI (including the forward slash after the domain name) serves as a  
1794 machine-readable alternate prefix for an absolute XRI in URI-normal form.

1795 The normative ABNF for an HXRI is defined below based on the ireg-name, xri-hier-part,  
1796 and iquery productions defined in [XRISyntax]. XRIs that need to be understood by non-XRI-  
1797 aware clients SHOULD be published as HTTP URIs conforming to this HXRI production.

```
1798 HXRI           = proxy-resolver "/" QXRI
1799 proxy-resolver = ( "http://" / "https://" ) proxy-reg-name
1800 proxy-reg-name = "xri." ireg-name
1801 QXRI          = xri-hier-part [ "?" i-query ]
```

1802 URI processors that recognize XRIs SHOULD interpret the local part of an HTTP or HTTPS URI  
1803 (the path segment(s) and optional query segment) as an XRI provided that: a) it conforms to this  
1804 ABNF, and b) the first segment of the path conforms to the xri-authority or iauthority productions  
1805 in [XRISyntax].

1806 For references to communities that offer public XRI proxy resolution services, see the Wikipedia  
1807 entry on XRI [WikipediaXRI].

### 1808 11.3 HXRI Query Parameters

1809 In proxy resolution, the XRI resolution input parameters defined in section 8.1 are bound to an  
1810 HTTP(S) interface using the conventional web model of encoding them in an HTTP(S) URI, which  
1811 in this case is an HXRI. The binding of the logical parameter names to HXRI component parts is  
1812 defined in Table 19.

Logical Parameter Name	HXRI Component	HXRI Query Parameter Name
QXRI	Entire path and query string of HXRI (exclusive of HXRI query parameters listed below)	N/A
Resolution Output Format	HXRI query parameter	_xrd_r
Service Type	HXRI query parameter	_xrd_t
Service Media Type	HXRI query parameter	_xrd_m

1813 Table 19: Binding of logical XRI resolution parameters to QXRI query parameters.

- 1814 Following are the rules for the use of the parameters specified in Table 19.
- 1815 1. The QXRI MUST be normalized as specified in section 11.2.
  - 1816 2. If the original QXRI has an existing query component, the HXRI query parameters MUST  
1817 be appended to that query component.
- 1818 **IMPORTANT:** The query parameter names in Table 19 were chosen to minimize the probability of  
1819 collision with any pre-existing query parameter names in the QXRI. If there is any conflict, the  
1820 pre-existing query parameter names MUST be percent-encoded prior to transformation into an  
1821 HXRI.
- 1822 3. After proxy resolution, the HXRI query parameters MUST subsequently be removed from  
1823 the QXRI query component. The existing QXRI query component MUST NOT be altered  
1824 in any other way, i.e., it must be passed through with no changes in parameter order,  
1825 escape encoding, etc.
  - 1826 4. If the original QXRI does not have a query component, one MUST be added to pass any  
1827 HXRI query parameters. After proxy resolution, this query component MUST be entirely  
1828 removed.
  - 1829 5. If the original QXRI had a null query component (only a leading question mark), or a  
1830 query component consisting of only question marks, *one additional leading question mark*  
1831 MUST be added before adding any HXRI query parameters. After proxy resolution, any  
1832 HXRI query parameters and exactly one leading question mark MUST be removed. See  
1833 the URI construction steps defined in section 13.6.
  - 1834 6. Each HXRI query parameter MUST be delimited from other parameters by an ampersand  
1835 (“&”).
  - 1836 7. Each HXRI query parameter MUST be delimited from its value by an equals sign (“=”).
  - 1837 8. If an HXRI query parameter includes one of the media type parameters defined in Table  
1838 6, it MUST be delimited from the HXRI query parameter with a semicolon (“;”).
  - 1839 9. The fully-composed HXRI MUST be encoded and decoded as specified in section 11.4.
  - 1840 10. If any HXRI query parameter name is included but its value is empty, the value of the  
1841 parameter MUST be considered null.

#### 1842 11.4 HXRI Encoding/Decoding Rules

1843 To conform with the typical requirements of web server URI parsing libraries, HXRIs MUST be  
1844 encoded prior to input to a proxy resolver and decoded prior to output from a proxy resolver.  
1845 Because web server libraries typically perform some of these decoding functions automatically,  
1846 implementers MUST ensure that a proxy resolver, when used in conjunction with a specific web  
1847 server, accomplishes the full set of HXRI decoding steps specified in this section. In particular,  
1848 these decoding steps MUST be performed prior to any comparison operations defined in this  
1849 specification.

1850 Before any HXRI-specific encoding steps are performed, the QXRI portion of the HXRI (including  
1851 all HXRI query parameters) MUST be transformed into URI-normal form as defined in section 2.3  
1852 of **[XRISyntax]**. This means characters not allowed in URIs, such as SPACE, or characters that  
1853 are valid only in IRIs, such as UCS characters above the ASCII range, MUST be percent  
1854 encoded. Also, the plus sign character (“+”) MUST NOT be used to encode the SPACE character  
1855 because in decoding the percent-encoded sequence %2B MUST be interpreted as the plus sign  
1856 character (“+”).

1857 Once the HXRI is in URI-normal form, the following sequence of encoding steps MUST be  
1858 performed in the order specified before an HXRI is submitted to a proxy resolver.

1859 **IMPORTANT:** this sequence of steps is not idempotent, so it MUST be performed only once.

- 1860 1. First, in order to preserve percent-encoding when the HXRI is passed through a web  
 1861 server, all percent signs MUST be themselves percent-encoded, i.e., a SPACE encoded  
 1862 as %20 will become %2520.
- 1863 2. Second, to prevent misinterpretation of HXRI query parameters, any occurrences of the  
 1864 ampersand character (“&”) within an HXRI query parameter that are NOT used to delimit  
 1865 it from another query parameter MUST be percent encoded using the sequence %26.
- 1866 3. Third, to prevent misinterpretation of the semicolon character by the web server, any  
 1867 semicolon used to delimit one of the media type parameters defined in Table 6 from the  
 1868 media type value MUST be percent-encoded using the sequence %3B.

1869 To decode an encoded HXRI back into URI-normal form, the above sequence of steps MUST be  
 1870 performed in reverse order. Again, the sequence is not idempotent so it MUST be performed only  
 1871 once.

1872 Table 20 illustrates the components of an example HXRI before transformation to URI-normal  
 1873 form. The characters requiring percent encoding are highlighted in **red**. Note the space in the  
 1874 string `hello planète`. Also, for purposes of illustration, the Type component contains a query  
 1875 string (which would not normally appear in a Type identifier).

QXRI	<code>https://xri.example.com/=example*r<sup>E</sup>sum<sup>E</sup>/path?query</code>
<code>_xrd_r</code>	<code>_xrd_r=application/xrds+xml;https=true;sep=true</code>
<code>_xrd_t</code>	<code>_xrd_t=http://example.org/test?a=1&amp;b=hello planète</code>
<code>_xrd_m</code>	<code>_xrd_m=application/atom+xml</code>

1876 *Table 20: Example of HXRI components prior to transformation to URI-normal form.*

1877 Table 21 illustrates these components after transformation to URI-normal form. Characters that  
 1878 have been percent-encoded are in **blue**. Characters still requiring percent encoding according to  
 1879 the rules defined in this section are highlighted in **red**.

QXRI	<code>https://xri.example.com/=example*r<sup>E9</sup>sum<sup>E9</sup>/path?query</code>
<code>_xrd_r</code>	<code>_xrd_r=application/xrds+xml;https=true;sep=true</code>
<code>_xrd_t</code>	<code>_xrd_t=http://example.org/test?a=1&amp;b=hello%20plan<sup>E8</sup>te</code>
<code>_xrd_m</code>	<code>_xrd_m=application/atom+xml</code>

1880 *Table 21: Example of HXRI components after transformation to URI-normal form.*

1881 Table 22 illustrates the components after all encoding rules defined in this section are applied.

QXRI	<code>https://xri.example.com/=example*r<sup>25E9</sup>sum<sup>25E9</sup>/path?query</code>
<code>_xrd_r</code>	<code>_xrd_r=application/xrds+xml<sup>3B</sup>https=true<sup>3B</sup>sep=true</code>
<code>_xrd_t</code>	<code>_xrd_t=http://example.org/test?a=1<sup>26</sup>b=hello%2520plan<sup>25E8</sup>te</code>
<code>_xrd_m</code>	<code>_xrd_m=application/atom+xml</code>

1882 *Table 22: Example of HXRI components after application of the required encoding rules.*

1883 Following is the fully-encoded HXRI:

```
1884 https://xri.example.com/=example*r%25E9sum%25E9/path?query
1885 &_xrd_r=application/xrds+xml%3Bhttps=true%3Bsep=true
1886 &_xrd_t=http://example.org/test?a=1%26b=hello%2520plan%25E8te
1887 &_xrd_m=application/atom+xml
```

1888 Following is the fully decoded HXRI returned to URI-normal form. Note that the proxy resolver  
1889 MUST leave the HXRI in URI-normal form for any further processing.

```
1890 https://xri.example.com/=example*r%E9sum%E9/path?query
1891 &_xrd_r=application/xrds+xml;https=true;sep=true
1892 &_xrd_t=http://example.org/test?a=1&b=hello%20plan%E8te
1893 &_xrd_m=application/atom+xml
```

## 1894 11.5 HTTP(S) Accept Headers

1895 In proxy resolution, one XRI resolution input parameter, the Service Media Type (section 8.1.4)  
1896 MAY be passed to a proxy resolver via the HTTP(S) Accept header of a resolution request. The  
1897 following rules apply to this input:

- 1898 1. As described in section 14.1 of **[RFC2616]**, the Accept header content type MAY consist  
1899 of multiple media type identifiers. If so, the proxy resolver MUST choose only one to  
1900 accept. A proxy resolver client SHOULD order media type identifiers according to the  
1901 client's preference and a proxy resolver server SHOULD choose the client's highest  
1902 preference.
- 1903 2. If the value of the Accept header content type is null, this MUST be interpreted as the  
1904 value of the Service Media Type parameter.
- 1905 3. If the value of the Service Media Type parameter is explicitly set via the `_xrd_m` query  
1906 parameter in the HXRI (including to a null value), this MUST take precedence over any  
1907 value set via an HTTP(S) Accept header.

## 1908 11.6 Null Resolution Output Format

1909 Unlike authority resolution as defined in the preceding sections, a proxy resolver MAY receive a  
1910 resolution request where the Resolution Output Format input parameter value is null—either  
1911 because this parameter is absent or because it was explicitly set to null using the `_xrd_r` query  
1912 parameter.

1913 If the value of the Resolution Output Format value is null, a resolver MUST proceed as if the  
1914 following media type parameters had the following values: `https=false`, `saml=false`,  
1915 `refs=true`, `sep=true`, `nodefault_t=false`, `nodefault_p=false`,  
1916 `nodefault_m=false`, and `uric=false`. In addition, the output MUST be an HTTP(S) redirect  
1917 as defined in the following section.

## 1918 11.7 Outputs and HTTP(S) Redirects

1919 For all values of the Resolution Output Format parameter except null, a proxy resolver MUST  
1920 follow the output rules defined in section 8.2.

1921 If the value of the Resolution Output Format is null, and the output is not an error, a proxy  
1922 resolver MUST follow the rules for output of a URI List as defined in section 8.2.3. However,  
1923 instead of returning a URI list, it MUST return the highest priority URI (the first one in the list) as  
1924 an HTTP(S) 3XX redirect with the Accept header content type set to the value of the Service  
1925 Media Type parameter.

1926 If the output is an error, a proxy resolver SHOULD return a human-readable error message as  
1927 specified in section 15.4.

1928 These rules enable XRI proxy resolvers to serve clients that do not understand XRI syntax or  
1929 resolution (such as non-XRI-enabled browsers) by automatically returning a redirect to the  
1930 service endpoint identified by a combination of the QXRI and the value of the HTTP(S) Accept  
1931 header (if any).

## 1932 **11.8 Differences Between Proxy Resolution Servers**

1933 An XRI proxy resolution request MAY be sent to any proxy resolver that will accept it. All XRI  
1934 proxy resolvers SHOULD deliver uniform responses given the same QXRI and other input  
1935 parameters. However, because proxy resolvers may potentially need to make decisions about  
1936 network errors, Redirect and Ref processing, and trust policies on behalf of the client they are  
1937 proxying, and these decisions may be based on local policy, in some cases different proxy  
1938 resolvers may return different results.

## 1939 **11.9 Combining Authority and Proxy Resolution Servers**

1940 The majority of DNS nameservers are recursing nameservers that answer both queries for which  
1941 they are authoritative and queries which they must forward to other nameservers. The same rule  
1942 applies in XRI architecture: in many cases the optimum configuration will be combining an  
1943 authority server and proxy resolver in the same server. This server can publish a self-describing  
1944 XRDS document (section 9.1.6) that advertises both its authority resolution and proxy resolution  
1945 service endpoints. It can also optimize caching of XRDs for clients in its resolution community  
1946 (see section 16.4).

1947

## 12 Redirect and Ref Processing

1948

The purpose of the `xrd:Redirect` and `xrd:Ref` elements is to enable identifier authorities to distribute and delegate management of XRDS documents. There are two primary use cases for using multiple XRDS documents to describe the same resource:

1949

1950

1951

- One identifier authority needs to manage descriptions of the resource from different physical locations on the network, e.g., registry, directory, webserver, blog, etc. This is the purpose of the `xrd:Redirect` element.

1952

1953

1954

- One identifier authority needs to delegate all or part of resource description to a different identifier authority, e.g., an individual might delegate responsibility for different aspects of an XRDS to his/her spouse, school, employer, doctor, etc. This is the purpose of the `xrd:Ref` element.

1955

1956

1957

1958

Table 23 summarizes the similarities and differences between the `xrd:Redirect` and `xrd:Ref` elements.

1959

Requirement	Redirect	Ref
Must contain	HTTP(S) URI	XRI
Accepts the same <code>append</code> attribute as the <code>xrd:URI</code> element	Yes	No
Delegates to a different identifier authority	No	Yes
Must include a subset of the synonyms available in the source XRD	Yes	No
Available at both XRD level and SEP level	Yes	Yes
Processed automatically if present at the XRD level	Yes	Yes
Always results in nested XRDS document, even if only to report an error	Yes	Yes
Required attribute of XRDS element for nested XRDS document	<code>redirect</code>	<code>ref</code>
Number of XRDS in nested XRDS document	1	1 or more

1960

Table 23: Comparison of Redirect and Ref elements.

1961

The combination of Redirect and Ref elements should enable identifier authorities to implement a wide variety of distributed XRDS management policies.

1962

1963

**IMPORTANT:** Since they involve recursive calls, XRDS authors SHOULD use Redirects and Refs carefully and SHOULD perform special testing on XRDS documents containing Redirects and/or Refs to ensure they yield expected results. In particular implementers should study the recursive calls between authority resolution and service endpoint selection illustrated in Figure 2, Figure 5, Figure 7, and Figure 8 and see the guidance in section 12.6, *Recursion and Backtracking*.


1964

1965

1966

1967

1968 Figure 7 (non-normative) illustrates the logical flow of Redirect and Ref processing.

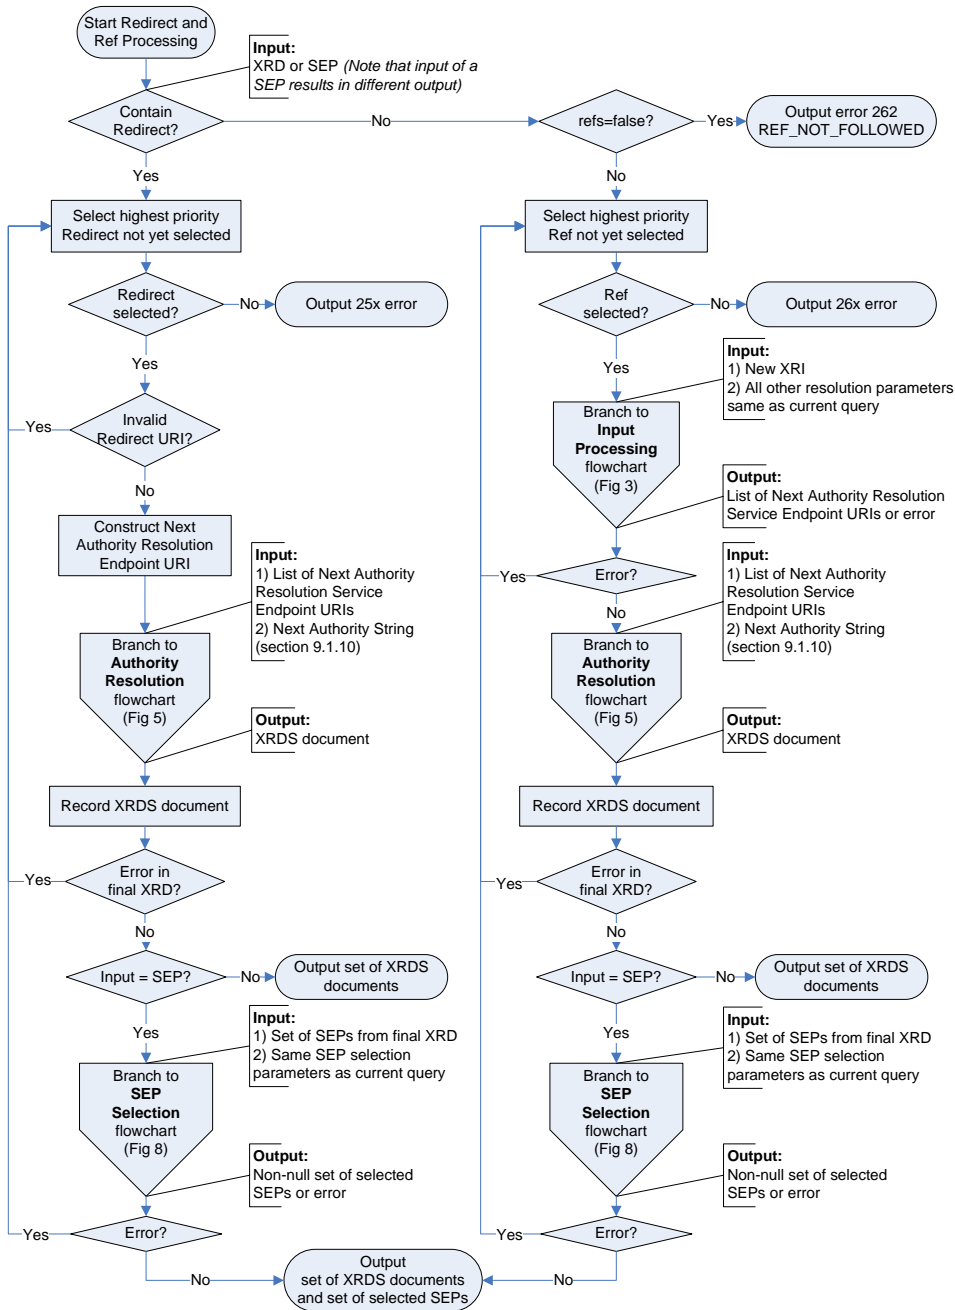

1969  
1970

Figure 7: Redirect and Ref processing flowchart.



## 1971 12.1 Cardinality

1972 Redirect and Ref elements may be used both at the XRD level (as a child of the `xrd:XRD`  
1973 element) and the SEP level (as a child of the `xrd:XRD/xrd:Service` element) within an XRD.  
1974 In both cases, to simplify processing, the XRD schema (Appendix B) enforces the following rules:

- 1975 • At the XRD level, an XRD MAY contain only one of the following: zero-or-more  
1976 `xrd:Redirect` or zero-or-more `xrd:Ref` elements.
- 1977 • At the SEP level, a SEP MAY contain only one of the following: zero-or-more `xrd:URI`  
1978 elements, zero-or-more `xrd:Redirect` elements, or zero-or-more `xrd:Ref` elements.

Comment [DSR5]: Clarified wording per comment from Eran Hammer-Lahav.

## 1979 12.2 Precedence

1980 XRDS authors should take special note of the following precedence rules for Redirect and Refs.

- 1981 1. If a Redirect or Ref element is present at the XRD level, it MUST be processed  
1982 immediately before a resolver continues with authority resolution, performs service  
1983 endpoint selection (required or optional), or returns its final output. This rule applies  
1984 recursively to all XRDS documents resolved as a result of Redirect or Ref processing.
- 1985 2. If a Redirect or Ref element is not present at the XRD level, but is present in the highest  
1986 priority service endpoint selected by the rules in section 13, it MUST be processed  
1987 immediately before a resolver completes service endpoint selection (required or optional),  
1988 or returns its final output. This rule also applies recursively to all XRDS documents  
1989 resolved as a result of Redirect or Ref processing.

1990 **IMPORTANT:** Due to these rules, even if a resolver has resolved the final subsegment of an XRI,  
1991 the authority resolution phase is still not complete as long as the final XRD has a Redirect or Ref  
1992 at the XRD level. This Redirect or Ref MUST be resolved until it returns an XRD that does not  
1993 contain an Redirect or Ref at the XRD level. The same rule applies to the optional service  
1994 endpoint selection phase: it is not complete until it locates a final XRD that contains the requested  
1995 SEP but: a) the XRD does not contain an Redirect or Ref at the XRD level, and b) the highest  
1996 priority selected SEP does not contain a Redirect or Ref.

1997 Based on these rules, the following best practices are recommended.

- 1998 1. XRDS authors SHOULD NOT put any service endpoints in an XRD that contains a  
1999 Redirect or Ref at the XRD level because by definition these service endpoints will be  
2000 ignored.
- 2001 2. XRDS authors SHOULD use a Redirect or Ref element at the XRD level if they wish to  
2002 relocate or delegate resolution behavior regardless of any service endpoint query.
- 2003 3. XRDS authors SHOULD use a Redirect or Ref element in a service endpoint for which  
2004 they expect a POSITIVE match as defined in section 13.4.1 if they wish to control  
2005 resolution behavior based an explicit service endpoint match.
- 2006 4. XRDS authors SHOULD use a Redirect or Ref element in a service endpoint for which  
2007 they expect a DEFAULT match as defined in section 13.4.1 if they wish to control  
2008 resolution behavior based on the absence of an explicit service endpoint match.
- 2009 5. XRDS authors SHOULD NOT include two or more SEPs of equal priority in an XRD if  
2010 they contain Redirects or Refs that will make resolution ambiguous or non-deterministic.

2011 Also note that, during the authority resolution phase, a Redirect or Ref placed in the authority  
2012 resolution SEP of an XRD will have effectively the same result as a Redirect or Ref placed at the  
2013 XRD level. The first option SHOULD be used if the XRD contains other service endpoints or  
2014 metadata describing the resource. The second option SHOULD be used only if the XRD contains  
2015 no service endpoints.

## 2016 12.3 Redirect Processing

2017 The purpose of the `xrd:Redirect` element is to enable an authority to redirect from an XRDS  
2018 document managed in one network location (e.g., a registry) to a different XRDS document  
2019 managed in a different network location by the same authority (e.g., a web server, blog, etc.) It is  
2020 similar to an HTTP(S) redirect; however, it is managed at the XRDS document level rather than  
2021 HTTP(S) transport level. Note that unlike a Ref, a Redirect does NOT delegate to a different XRI  
2022 authority, but only to the same authority at a different network location.

2023 Following are the normative rules for processing of the `xrd:Redirect` element.

- 2024 1. To process a Redirect at either the XRD or SEP level, the resolver MUST begin by  
2025 selecting the highest priority `xrd:XRD/xrd:Redirect` element in the XRD or SEP.
- 2026 2. If the value of the resolution subparameter `https` is FALSE, or the subparameter is  
2027 absent or empty, the value of the selected `xrd:Redirect` element MUST be EITHER a  
2028 valid HTTP URI or a valid HTTPS URI. If not, the resolver MUST select the next highest  
2029 priority `xrd:Redirect` element. If all instances of this element fail, the resolver MUST  
2030 stop and return the error 251 `INVALID_REDIRECT` in the XRD containing the Redirect  
2031 or as a plain text error message as specified in section 15.
- 2032 3. If the value of the resolution subparameter `https` is TRUE, the value of the selected  
2033 `xrd:Redirect` element MUST be a valid HTTPS URI. If not, the resolver MUST select  
2034 the next highest priority `xrd:Redirect` element. If all instances of this element fail, the  
2035 resolver MUST stop and return the error 252 `INVALID_HTTPS_REDIRECT` in the XRD  
2036 containing the Redirect or as a plain text error message as specified in section 15.
- 2037 4. Once a valid `xrd:Redirect` element has been selected, if the  
2038 `xrd:XRD/xrd:Redirect` element includes the `append` attribute, the resolver MUST  
2039 construct the final HTTP(S) URI as defined in section 13.7.
- 2040 5. The resolver MUST request a new XRDS document from the final HTTP(S) URI using the  
2041 protocol defined in section 6.3. If the Resolution Output Format is an XRDS document,  
2042 the resolver MUST embed a nested XRDS document containing an XRD representing  
2043 the Redirect as specified in section 12.5.
- 2044 6. If resolution of an `xrd:Redirect` element fails during the authority resolution phase of  
2045 the original resolution query, or if resolution of an `xrd:Redirect` element fails during  
2046 the optional service endpoint selection phase OR the final XRD does not contain the  
2047 requested SEP, then the resolver MUST report the error in the final XRD of the nested  
2048 XRDS document using the status codes defined in section 15. (One nested XRDS  
2049 document will be added for each Redirect attempted by the resolver.) The resolver MUST  
2050 then select the next highest priority `xrd:Redirect` element from the original XRD or  
2051 SEP and repeat rule 7. For more details, see section 12.6, *Recursion and Backtracking*.
- 2052 7. If resolution of all `xrd:Redirect` elements in the XRD or SEP that originally triggered  
2053 Redirect processing fails, the resolver MUST stop and return a 25x error in the XRD  
2054 containing the Redirect or as a plain text error message as specified in section 15. The  
2055 resolver MUST NOT try any other SEPs even if multiple SEPs were selected as specified  
2056 in section 13.
- 2057 8. If resolution succeeds, the resolver MUST verify the synonym elements in the new XRD  
2058 as specified in section 14.1. If synonym verification fails, the resolver MUST stop and  
2059 return the error specified in that section.
- 2060 9. If the value of the resolution subparameter `saml` is TRUE, the resolver MUST verify the  
2061 signature on the XRD as specified in section 10.2.4. If signature verification fails, the  
2062 resolver MUST stop and return the error specified in that section.
- 2063 10. If Redirect resolution succeeds, further authority resolution or service endpoint selection  
2064 MUST continue based on the new XRD.

## 2065 12.4 Ref Processing

2066 The purpose of the `xrd:Redirect` element is to enable one authority to delegate management  
2067 of all or part of an XRDS document to another authority. For example, an individual might  
2068 delegate management of all or portions of an XRDS document to his/her spouse, school,  
2069 employer, doctor, etc. This delegation may cover the entire document (an XRD level Ref), or only  
2070 one or more specific service endpoints within the document (a SEP level Ref).

2071 Following are the normative rules for processing of the `xrd:Ref` element.

- 2072 1. Ref processing is only be performed if the value of the `refs` subparameter (Table 6) is  
2073 TRUE or it is absent or empty. If the value is FALSE and the XRD contains at least one  
2074 `xrd:Ref` element that could be followed to complete the resolution query, the resolver  
2075 MUST stop and return the error 262 `REF_NOT_FOLLOWED` in the XRD containing the  
2076 Ref or as a plain text error message as defined in section 15. The rules below presume  
2077 that `refs=true`.
- 2078 2. To process a Ref at either the XRD or SEP level, the resolver MUST begin by selecting  
2079 the highest priority `xrd:XRD/xrd:Ref` element from the XRD or SEP.
- 2080 3. The value of the selected `xrd:Ref` element MUST be a valid absolute XRI. If not, the  
2081 resolver MUST select the next highest priority `xrd:Ref` element. If all instances of this  
2082 element fail, the resolver MUST stop and return the error 261 `INVALID_REF` in the XRD  
2083 containing the Ref or as a plain text error message as defined in section 15.
- 2084 4. Once a valid `xrd:XRD/xrd:Ref` value is selected, the resolver MUST begin resolution  
2085 of a new XRDS document from this XRI using the protocols defined in this specification.  
2086 Other than the QXRI, the resolver MUST use the same resolution query parameters as  
2087 the original query. If the Resolution Output Format is an XRDS document, the resolver  
2088 MUST embed a nested XRDS document containing an XRD representing the Ref as  
2089 defined in section 12.5.
- 2090 5. If resolution of an `xrd:Ref` element fails during the authority resolution phase of the  
2091 original resolution query, or if resolution of an `xrd:Ref` element fails during the optional  
2092 service endpoint selection phase OR the final XRD does not contain the requested  
2093 service endpoint, then the resolver MUST record the nested XRDS document as far as  
2094 resolution was successful, including the relevant status codes for each XRD as specified  
2095 in section 15. The resolver MUST then select the next highest priority `xrd:Ref` element  
2096 as specified above and repeat rule 5. For more details, see section 12.6, *Recursion and*  
2097 *Backtracking*.
- 2098 6. If resolution of all `xrd:Ref` elements in the XRD or SEP originating Ref processing fails,  
2099 the resolver MUST stop and return a 26x error in the XRD containing the Ref or as a  
2100 plain text error message as specified in section 15. The resolver MUST NOT try any  
2101 other SEPs even if multiple SEPs were selected as specified in section 13.
- 2102 7. If resolution of an `xrd:Ref` element succeeds and `cid=true`, the resolver MUST  
2103 perform CanonicalID verification across all XRDs in the nested XRDS document as  
2104 specified in section 14.3. Note that each set of XRDs in each new nested XRDS  
2105 document produced as a result of Redirect or Ref processing constitutes its own  
2106 CanonicalID verification chain. *CanonicalID verification never crosses between XRDS*  
2107 *documents*. See section 12.5 for examples.
- 2108 8. If resolution of an `xrd:Ref` element succeeds and the final XRD contains the service  
2109 endpoint(s) necessary to continue or complete the original resolution query, further  
2110 authority resolution or service endpoint selection MUST continue based on the final XRD.

## 2111 12.5 Nested XRDS Documents

2112 Processing of a Redirect or Ref ALWAYS produces a new XRDS document that describes the  
2113 Redirect or Ref that was followed, even if the result was an error. If the final requested Resolution  
2114 Output Format is NOT an XRDS document, this new XRDS document is only needed to obtain  
2115 the metadata necessary to continue or complete resolution. However, if the final requested  
2116 Resolution Output Format is an XRDS document, each XRDS document produced as a result of  
2117 Redirect or Ref processing MUST be nested inside the outer XRDS document immediately  
2118 following the `xrd:XRD` element containing the `xrd:Redirect` or `xrd:Ref` element being  
2119 followed. If more than one Redirect or Ref element is resolved due to an error, the corresponding  
2120 nested XRDS documents MUST be included in the same order as the Redirect or Ref elements  
2121 that were followed to produce them.

2122 Each new XRDS document is a recursive authority resolution call and MUST conform to all  
2123 authority resolution requirements. In addition, the following rules apply:

- 2124 • For a Redirect, the `xrds:XRDS/@redirect` attribute of the nested XRDS document MUST  
2125 contain the fully-constructed HTTP(S) URI it describes as specified in section 12.3.
- 2126 • For a Ref, the `xrds:XRDS/@ref` attribute of the nested XRDS document MUST contain the  
2127 exact value of the `xrd:XRD/xrd:Ref` element it describes.

2128 This allows a consuming application to verify the complete chain of XRDs obtained to resolve the  
2129 original query identifier even if resolution traverses multiple Redirects or Refs, and even if errors  
2130 were encountered. Note that like the outer XRDS document, nested XRDS documents MUST  
2131 NOT include an XRD for the community root subsegment because this is part of the configuration  
2132 of the resolver.

2133 In addition, during SAML trusted resolution, if a nested XRDS document includes an XRD with an  
2134 `xml:id` attribute value matching the `xml:id` attribute value of any previous XRD in the chain of  
2135 resolution requests beginning with the original QXRI, the resolver MUST replace this XRD with an  
2136 empty XRD element. The resolver MUST set this empty element's `idref` attribute value to the  
2137 value of the `xml:id` attribute of the matched XRD element. This prevents conflicting `xml:id`  
2138 values.

### 2139 12.5.1 Redirect Examples

#### 2140 Example #1:

2141 In this example the original query identifier is `xri://@a`. The first XRD contains an XRD-level  
2142 Redirect to `http://a.example.com/`. The elements and attributes specific to Redirect  
2143 processing are shown in **bold**. CanonicalIDs are included to illustrate the synonym verification  
2144 rule in section 12.3.

```
2145 <XRDS xmlns="xri://$xrds" ref="xri://@a">
2146   <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2147     <Query>*a</Query>
2148     <ProviderID>xri://@</ProviderID>
2149     <CanonicalID>xri://@!1</CanonicalID> ;XRDS #1 CID #1
2150     <Redirect>http://a.example.com/</Redirect>
2151     ...
2152   </XRD>
2153   <XRDS redirect="http://a.example.com/">
2154     <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2155       <ProviderID>xri://@</ProviderID>
2156       <CanonicalID>xri://@!1</CanonicalID> ;SAME AS XRDS #1 CID #1
2157       ...
2158     <Service>
2159       <Type>http://openid.net/signon/1.0</Type>
2160       <URI>http://openid.example.com/</URI>
```

2161  
2162  
2163  
2164

```
</Service>  
</XRD>  
</XRDS>  
</XRDS>
```

2165 **Example #2:**

2166 In this example the original query identifier is `xri://@a*b*c`. The second XRD contains a SEP-  
2167 level Redirect in its authority resolution SEP to `http://other.example.com/`. Note that  
2168 because authority resolution is not complete when this Redirect is encountered, it continues in the  
2169 outer XRDS after the nested XRDS representing the Redirect is complete. Again, CanonicalIDs  
2170 are included to illustrate the synonym verification rule.

2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214

```
<XRDS xmlns="xri://$xrds" ref="xri://@a*b*c">  
  <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">  
    <Query>*a</Query>  
    <ProviderID>xri://@</ProviderID>  
    <CanonicalID>xri://@!1</CanonicalID> ;XRDS #1 CID #1  
    ...  
    <Service>  
      <Type>xri://$res*auth*($v*2.0)</Type>  
      <URI>http://a.example.com/</URI>  
    </Service>  
  </XRD>  
  <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">  
    <Query>*b</Query>  
    <ProviderID>xri://@!1</ProviderID>  
    <CanonicalID>xri://@!1!2</CanonicalID> ;XRDS #1 CID #2  
    ...  
    <Service>  
      <Type>xri://$res*auth*($v*2.0)</Type>  
      <Redirect>http://other.example.com</Redirect>  
    </Service>  
  </XRD>  
<XRDS redirect="http://other.example.com">  
  <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">  
    <Query>*b</Query>  
    <ProviderID>xri://@!1</ProviderID>  
    <CanonicalID>xri://@!1!2</CanonicalID> ;SAME AS XRDS #1 CID #2  
    ...  
    <Service>  
      <Type>xri://$res*auth*($v*2.0)</Type>  
      <URI>http://b.example.com/</URI>  
    </Service>  
  </XRD>  
</XRDS>  
<XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">  
  <Query>*c</Query>  
  <ProviderID>xri://@!1!2</ProviderID>  
  <CanonicalID>xri://@!1!2!3</CanonicalID> ;XRDS #1 CID #3  
  ...  
  <Service>  
    ...final service endpoints described here...  
  </Service>  
</XRD>  
</XRDS>
```

2215 **Example #3:**

2216 In this example the original query identifier is again `xri://@a*b*c`. This time the final XRD  
2217 contains a SEP-level Redirect to `http://other.example.com/`. Because authority resolution  
2218 is complete, the outer XRDS ends with a nested XRDS representing the SEP-level Redirect.

```
2219 <XRDS xmlns="xri://$xrds" ref="xri://@a*b*c">
2220   <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2221     <Query>*a</Query>
2222     <ProviderID>xri://@</ProviderID>
2223     <CanonicalID>xri://@!1</CanonicalID>           ;XRDS #1 CID #1
2224     ...
2225     <Service>
2226       <Type>xri://$res*auth*($v*2.0)</Type>
2227       <URI>http://a.example.com/</URI>
2228     </Service>
2229   </XRD>
2230   <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2231     <Query>*b</Query>
2232     <ProviderID>xri://@!1</ProviderID>
2233     <CanonicalID>xri://@!1!2</CanonicalID>         ;XRDS #1 CID #2
2234     ...
2235     <Service>
2236       <Type>xri://$res*auth*($v*2.0)</Type>
2237       <URI>http://b.example.com/</URI>
2238     </Service>
2239   </XRD>
2240   <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2241     <Query>*c</Query>
2242     <ProviderID>xri://@!1!2</ProviderID>
2243     <CanonicalID>xri://@!1!2!3</CanonicalID>       ;XRDS #1 CID #3
2244     ...
2245     <Service>
2246       <Type>http://openid.net/signon/1.0</Type>
2247       <Redirect>http://r.example.com/openid</Redirect>
2248     </Service>
2249   </XRD>
2250   <XRDS redirect="http://r.example.com/openid">
2251     <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2252       <ProviderID>xri://@!1!2</ProviderID>
2253       <CanonicalID>xri://@!1!2!3</CanonicalID>     ;SAME AS XRDS #1 CID
2254 #3
2255       ...
2256       <Service>
2257         <Type>http://openid.net/signon/1.0</Type>
2258         <URI>http://openid.example.com/</URI>
2259       </Service>
2260     </XRD>
2261   </XRDS>
2262 </XRDS>
```

## 2263 12.5.2 Ref Examples

### 2264 Example #1:

2265 In this example the original query identifier is `xri://@a`. The first XRD contains an XRD-level  
2266 Ref to `xri://@x*y`. The CanonicalID values are included to illustrate the CanonicalID  
2267 verification rules in section 14.3.

```
2268 <XRDS xmlns="xri://$xrds" ref="xri://@a">
2269   <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2270     <Query>*a</Query>
2271     <ProviderID>xri://@</ProviderID>
2272     <CanonicalID>xri://@!1</CanonicalID>           ;XRDS #1 CID #1
2273     <Ref>xri://@x*y</Ref>
2274   </XRD>
2275   <XRDS ref="xri://@x*y">
2276     <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2277       <Query>*x</Query>
2278       <ProviderID>xri://@</ProviderID>
2279       <CanonicalID>xri://@!7</CanonicalID>         ;XRDS #2 CID #1
2280       ...
2281       <Service>
2282         <Type>xri://$res*auth*($v*2.0)</Type>
2283         <URI>http://x.example.com/</URI>
2284       </Service>
2285     </XRD>
2286     <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2287       <Query>*y</Query>
2288       <ProviderID>xri://@!7</ProviderID>
2289       <CanonicalID>xri://@!7!8</CanonicalID>       ;XRDS #2 CID #2
2290       ...
2291       <Service>
2292         <Type>xri://$res*auth*($v*2.0)</Type>
2293         <URI>http://y.example.com/</URI>
2294       </Service>
2295       <Service>
2296         <Type>http://openid.net/signon/1.0</Type>
2297         <URI>http://openid.example.com/</URI>
2298       </Service>
2299     </XRD>
2300   </XRDS>
2301 </XRDS>
```

### 2302 Example #2:

2303 In this example the original query identifier is `xri://@a*b*c`. The second XRD contains a SEP-  
2304 level Ref in its authority resolution SEP to `xri://@x*y`. Note that because authority resolution is  
2305 not complete when this Ref is encountered, it continues in the outer XRDS after the nested XRDS  
2306 representing the Ref. *Note especially how the CanonicalIDs progress to satisfy the CanonicalID*  
2307 *verification rules specified in section 14.3.*

```
2308 <XRDS xmlns="xri://$xrds" ref="xri://@a*b*c">
2309   <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2310     <Query>*a</Query>
2311     <ProviderID>xri://@</ProviderID>
2312     <CanonicalID>xri://@!1</CanonicalID>           ;XRDS #1 CID #1
2313     ...
2314     <Service>
2315       <Type>xri://$res*auth*($v*2.0)</Type>
2316       <URI>http://a.example.com/</URI>
2317     </Service>
```

```

2318 </XRD>
2319 <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2320 <Query>*b</Query>
2321 <ProviderID>xri://@!1</ProviderID>
2322 <CanonicalID>xri://@!1!2</CanonicalID> ;XRDS #1 CID #2
2323 ...
2324 <Service>
2325 <Type>xri://$res*auth*($v*2.0)</Type>
2326 <Ref>xri://@x*y</Ref>
2327 </Service>
2328 </XRD>
2329 <XRDS ref="xri://@x*y">
2330 <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2331 <Query>*x</Query>
2332 <ProviderID>xri://@</ProviderID>
2333 <CanonicalID>xri://@!7</CanonicalID> ;XRDS #2 CID #1
2334 ...
2335 <Service>
2336 <Type>xri://$res*auth*($v*2.0)</Type>
2337 <URI>http://x.example.com/</URI>
2338 </Service>
2339 </XRD>
2340 <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2341 <Query>*y</Query>
2342 <ProviderID>xri://@!7</ProviderID>
2343 <CanonicalID>xri://@!7!8</CanonicalID> ;XRDS #2 CID #2
2344 ...
2345 <Service>
2346 <Type>xri://$res*auth*($v*2.0)</Type>
2347 <URI>http://y.example.com/</URI>
2348 </Service>
2349 </XRD>
2350 </XRDS>
2351 <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2352 <Query>*c</Query>
2353 <ProviderID>xri://@!1!2</ProviderID>
2354 <CanonicalID>xri://@!1!2!3</CanonicalID> ;XRDS #1 CID #3 IS
2355 CHILD OF XRDS #1 CID #2
2356 ...
2357 <Service>
2358 ...final service endpoints described here...
2359 </Service>
2360 </XRD>
2361 </XRDS>

```

2362 **Example #3:**

2363 In this example the original query identifier is again `xri://@a*b*c`. This time the final XRD  
2364 contains a SEP-level Ref to `xri://@x*y`. Because authority resolution is complete, the outer  
2365 XRDS ends with a nested XRDS representing the SEP-level Ref.

```

2366 <XRDS xmlns="xri://$xrds" ref="xri://@a*b*c">
2367 <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2368 <Query>*a</Query>
2369 <ProviderID>xri://@</ProviderID>
2370 <CanonicalID>xri://@!1</CanonicalID> ;XRDS #1 CID #1
2371 ...
2372 <Service>
2373 <Type>xri://$res*auth*($v*2.0)</Type>
2374 <URI>http://a.example.com/</URI>
2375 </Service>
2376 </XRD>

```



```

2377 <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2378   <Query>*b</Query>
2379   <ProviderID>xri://@!1</ProviderID>
2380   <CanonicalID>xri://@!1!2</CanonicalID>           ;XRDS #1 CID #2
2381   ...
2382   <Service>
2383     <Type>xri://$res*auth*($v*2.0)</Type>
2384     <URI>http://a.example.com/</URI>
2385   </Service>
2386 </XRD>
2387 <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2388   <Query>*c</Query>
2389   <ProviderID>xri://@!1!2</ProviderID>
2390   <CanonicalID>xri://@!1!2!3</CanonicalID>       ;XRDS #1 CID #3
2391   ...
2392   <Service>
2393     <Type>http://openid.net/signon/1.0</Type>
2394     <Ref>xri://@x*y</Ref>
2395   </Service>
2396 </XRD>
2397 <XRDS ref="xri://@x*y">
2398   <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2399     <Query>*x</Query>
2400     <ProviderID>xri://@/</ProviderID>
2401     <CanonicalID>xri://@!7</CanonicalID>         ;XRDS #2 CID #1
2402     ...
2403     <Service>
2404       <Type>xri://$res*auth*($v*2.0)</Type>
2405       <URI>http://x.example.com/</URI>
2406     </Service>
2407   </XRD>
2408   <XRD xmlns="xri://$xrd*($v*2.0)" version="2.0">
2409     <Query>*y</Query>
2410     <ProviderID>xri://@!7</ProviderID>
2411     <CanonicalID>xri://@!7!8</CanonicalID>       ;XRDS #2 CID #2
2412     ...
2413     <Service>
2414       <Type>xri://$res*auth*($v*2.0)</Type>
2415       <URI>http://y.example.com/</URI>
2416     </Service>
2417     <Service>
2418       <Type>http://openid.net/signon/1.0</Type>
2419       <URI>http://openid.example.com/</URI>
2420     </Service>
2421   </XRD>
2422 </XRDS>
2423 </XRDS>

```

## 2424 12.6 Recursion and Backtracking

2425 Redirect and Ref processing triggers recursive calls to authority resolution that produce nested  
2426 XRDS documents. This recursion can continue to any depth, i.e., a Redirect may contain another  
2427 Redirect or a Ref, and a Ref may contain another Ref or a Redirect. To avoid confusion, either in  
2428 resolver implementations or in XRDS documents, it is important to clarify the “backtracking” rules.  
2429 The following should be read in conjunction with the flowcharts in Figure 2, Figure 5, Figure 7,  
2430 and Figure 8.

- 2431 • *Separation of phases.* Redirect and Ref processing invoked during the authority resolution  
2432 phase is separate and distinct from Redirect and Ref processing invoked during the optional  
2433 service endpoint selection phase (see Figure 2). Redirect or Ref processing during the former  
2434 MUST successfully complete authority resolution or else return an error. Redirect or Ref  
2435 processing during the latter MUST successfully locate the requested service endpoint or else  
2436 return an error, i.e., it MUST NOT backtrack into the authority resolution phase.
- 2437 • *First recursion point.* The first time a resolver encounters a Redirect or a Ref within a phase is  
2438 called the *first recursion point*. There MUST be at most one first recursion point during the  
2439 authority resolution phase and at most one first recursion point during the optional service  
2440 endpoint selection phase. During the authority resolution phase, the first recursion point MAY  
2441 be either an XRD or a service endpoint (SEP). During the optional service endpoint selection  
2442 phase, the first recursion point MUST be a SEP.
- 2443 • *Priority order.* As specified in sections 12.3 and 12.4, once a resolver reaches a first  
2444 recursion point during the authority resolution stage, it MUST process Redirects or Refs in  
2445 priority order until either it successfully completes authority resolution (and the final XRD  
2446 does not contain an XRD-level Redirect or Ref), or until all Redirects or Refs have failed.  
2447 Similarly, once a resolver reaches a first recursion point during the optional service endpoint  
2448 selection phase, it MUST process Redirect or Ref in priority order until either it successfully  
2449 locates the requested SEP (and that SEP does not contain a Redirect or Ref), or until all  
2450 Redirects or Refs have failed.
- 2451 • *Next recursion point.* If a Redirect or Ref leads to another Redirect or Ref, this is called the  
2452 *next recursion point*. The same rules apply to the next recursion point as apply to the first  
2453 recursion point, except that if any next recursion point completely fails, the resolver MUST  
2454 return to the previous recursion point and continue trying any untried Redirects or Refs until  
2455 either it is successful or all Redirects or Refs have failed.
- 2456 • *Termination.* If the resolver returns to the first recursion point and all of its Redirects or Refs  
2457 have failed, the resolver MUST stop and return an error.

2458 To avoid excessive recursion and inefficient resolution responses, XRDS authors are  
2459 RECOMMENDED to use as few Redirects or Refs in a resolution chain as possible.

2460

## 13 Service Endpoint Selection

2461

The second phase of XRI resolution is called *service endpoint selection*. As noted in Figure 2, this

2462

phase is invoked automatically for each iteration of authority resolution after the first in order to

2463

select the Next Authority Resolution Service Endpoint as defined in section 9.1.9. It is also

2464

performed after authority resolution is complete if optional service endpoint selection is

2465


requested.

2466

### 13.1 Processing Rules

2467

Figure 8 (non-normative) shows the overall logical flow of the service endpoint selection process.

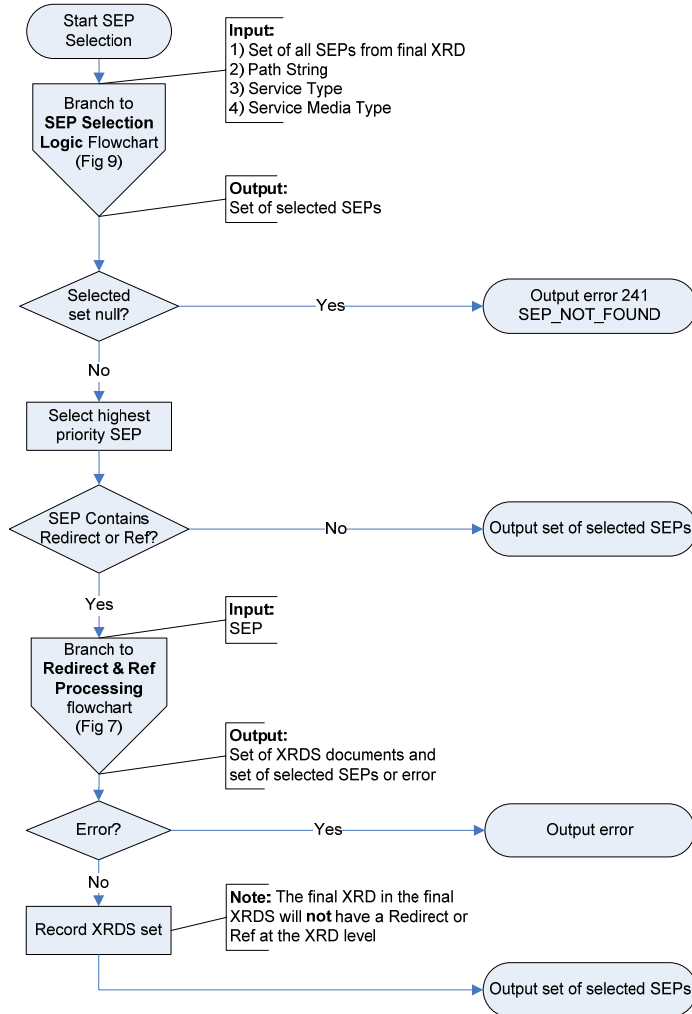

2468

2469

Figure 8: Service endpoint (SEP) selection flowchart.


- 2470 Following are the normative rules for the overall service endpoint selection process:
- 2471 1. The inputs for service endpoint selection are defined in Table 8.
  - 2472 2. For the set of all service endpoints (`xrd:XRD/xrd:Service` elements) in the XRD,  
2473 service endpoint selection **MUST** follow the logic defined in section 13.2. The output of  
2474 this process **MUST** be either the null set or a selected set of one or more service  
2475 endpoints.
  - 2476 3. If, after applying the service endpoint selection logic, the selected set is null, this function  
2477 **MUST** return the error 241 `SEP_NOT_FOUND`.
  - 2478 4. If, after applying the service endpoint selection logic, the selected set is not null and the  
2479 highest priority selected service endpoint contains an  
2480 `xrd:XRD/xrd:Service/xrd:Redirect` or `xrd:XRD/xrd:Service/xrd:Ref`  
2481 element, it **MUST** first be processed as specified in section 12. This is a recursive call  
2482 that will produce a nested XRDS document as defined in section 12.5.

2483

## 13.2 Service Endpoint Selection Logic

2484  
2485  
2486  
2487  
2488

Selection of service endpoints (SEPs) within an XRD is managed using service endpoint selection elements (SEs). As shown in Figure 9 (non-normative), the selection process first applies SEL matching rules (section 13.3), followed by SEP matching rules (section 13.4), to the set of all SEPs in the XRD. It then applies SEP selection rules (section 13.5) to determine the final output.

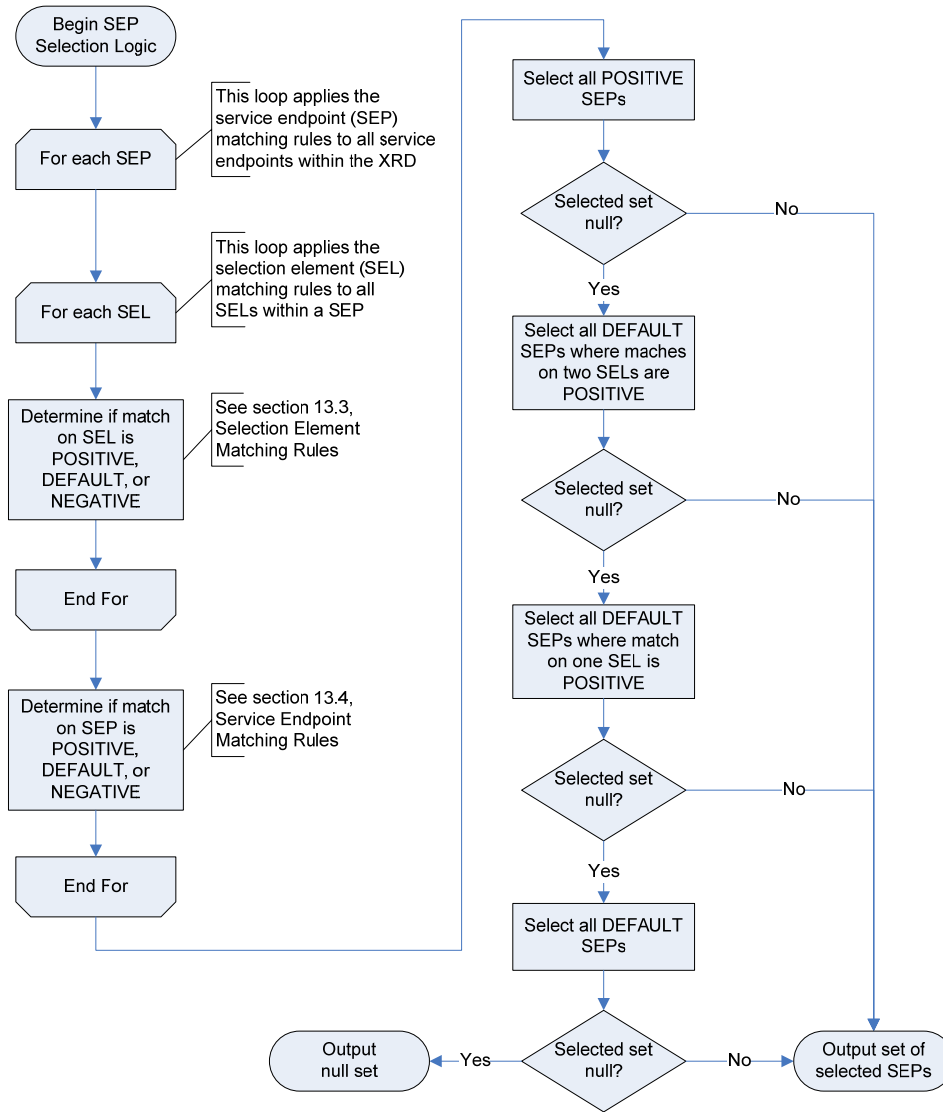

2489

2490 *Figure 9: Service endpoint (SEP) selection logic flowchart.*

2491

The following sections provide the normative rules for each section of this flowchart.

2492 **13.3 Selection Element Matching Rules**

2493 The first set of rules govern the matching of selection elements.

2494 **13.3.1 Selection Element Match Options**

2495 As defined in section 4.2.6, there are three categories of service endpoint selection elements:  
2496 `xrd:Type`, `xrd:Path`, and `xrd:MediaType`. Within each service endpoint, there is a match  
2497 option for each of the three categories of selection elements. Matches are tri-state: the three  
2498 options and their corresponding precedence order are defined in Table 24:

Match Option	Match Condition	Precedence
POSITIVE	A successful match based on the value of the <code>match</code> attribute as defined in 13.3.2 OR a successful match based the contents of the selection element as defined in sections 13.3.6 - 13.3.8.	1
DEFAULT	The value of the <code>match</code> attribute is <code>default</code> OR there is no instance of this type of selection element contained in the service endpoint as defined in section 13.3.3.	0
NEGATIVE	The selection element does not satisfy either condition above.	-1

2499 *Table 24: Match options for selection elements.*

2500 The Precedence order is used in the Multiple Selection Element Matching Rule (section 13.3.5).

2501 **IMPORTANT:** Failure of a POSITIVE match does not necessarily mean a NEGATIVE match; it  
2502 may still qualify as a DEFAULT match.

2503 **13.3.2 The Match Attribute**

2504 All three service endpoint selection elements accept the optional `match` attribute. This attribute  
2505 gives XRDS authors precise control over selection of SEPs based on the QXRI and other service  
2506 endpoint selection parameters. An enumerated list of the values for the `match` attribute is defined  
2507 in Table 25. If the `match` attribute is present with one of these values, the contents of the  
2508 selection element **MUST** be ignored, and the corresponding matching rule **MUST** be applied. If  
2509 the `match` attribute is absent or has any other value, the rules in this section do not apply.

Value	Matching Rule Applied to Corresponding Input Parameter
any	Automatically a POSITIVE match (i.e., input parameter is ignored).
default	Automatically a DEFAULT match (i.e., input parameter is ignored) UNLESS the value of the Resolution Output Format <code>nodefault_t</code> , <code>nodefault_p</code> or <code>nodefault_m</code> subparameter is set to TRUE for the applicable category of selection element, in which case it is a NEGATIVE match.
non-null	Any input value except null is a POSITIVE match. An input value of null is a NEGATIVE match.
null	An input value of null is a POSITIVE match. Any other input value is a NEGATIVE match.

2510 *Table 25: Enumerated values of the global match attribute and corresponding matching rules.*

2511 BACKWARDS COMPATIBILITY NOTE: earlier working drafts of this specification included the  
2512 values `match="none"` and `match="contents"`. Both are deprecated. The former is no longer  
2513 supported and the latter is now the default behaviour of any selection element that does not  
2514 include the `match` attribute. Implementers SHOULD accept these values accordingly.

### 2515 13.3.3 Absent Selection Element Matching Rule

2516 If a service endpoint does not contain at least one instance of a particular category of selection  
2517 element, it MUST be considered equivalent to the service endpoint having a DEFAULT match on  
2518 that category of selection element UNLESS overridden by a `nodefault_*` parameter as specified  
2519 in Table 25.

### 2520 13.3.4 Empty Selection Element Matching Rule

2521 If a selection element is present in a service endpoint but the element is empty, and if the element  
2522 does not contain a `match` attribute, it MUST be considered equivalent to having a `match`  
2523 attribute with a value of `null`.

### 2524 13.3.5 Multiple Selection Element Matching Rule

2525 Each service endpoint has only one match option for each category of selection element.  
2526 Therefore if a service endpoint contains more than one instance of the same category of selection  
2527 element (i.e., more than one `xrd:Type`, `xrd:Path`, or `xrd:MediaType` element), the match for  
2528 that category of selection element MUST be the match for the selection element(s) with the  
2529 highest precedence match option as defined in Table 24.

### 2530 13.3.6 Type Element Matching Rules

2531 The following rules apply to matching the value of the input Service Type parameter with the  
2532 contents of a non-empty `xrd:XRD/xrd:Service/xrd:Type` element when its `match` attribute  
2533 is absent.

- 2534 1. If the value is an XRI or IRI, it MUST be in URI-normal form as defined in section 4.4.
- 2535 2. Prior to comparison (and only for the purpose of comparison), the values of the Service  
2536 Type parameter and the `xrd:XRD/xrd:Service/xrd:Type` element SHOULD be  
2537 normalized according to the requirements of their identifier scheme. In particular, if an  
2538 XRI, IRI, or URI uses hierarchical syntax and does not include a local part (a path and/or  
2539 query component) after the authority component, a trailing forward slash after the  
2540 authority component MUST NOT be considered significant in comparisons. In all other  
2541 cases, a trailing forward slash MUST be considered significant in comparisons unless this  
2542 rule is overridden by scheme-specific comparison rules.
- 2543 3. To result in a POSITIVE match on this selection element, the values MUST be equivalent  
2544 according to the equivalence rules of the applicable identifier scheme. Any other result is  
2545 a NEGATIVE match on this selection element.

2546 As a best practice, service architects SHOULD assign identifiers for service types that are in URI-  
2547 normal form, do not require further normalization, and are easy to match.

### 2548 13.3.7 Path Element Matching Rules

2549 The following rules apply to matching the value of the input Path String (the path portion of the  
2550 QXRI as defined in section 8.1.1) with the contents of a non-empty

2551 `xrd:XRD/xrd:Service/xrd:Path` element when its `match` attribute is absent.

- 2552 1. If the value is a relative XRI or an IRI it MUST be in URI-normal form as defined in  
2553 section 4.4.
- 2554 2. Prior to comparison, the leading forward slash separating an XRI authority component  
2555 from the path component MUST be prepended to the Path String. Any subsequent  
2556 forward slash, including trailing forward slashes, MUST be significant in comparisons.
- 2557 3. The contents of the `xrd:XRD/xrd:Service/xrd:Path` element SHOULD include the  
2558 leading forward slash separating the XRI authority component from the path. If it does  
2559 not, one MUST be prepended prior to comparison.
- 2560 4. Equivalence comparison SHOULD be performed using Caseless Matching as defined in  
2561 section 3.13 of **[Unicode]**.
- 2562 5. To result in a POSITIVE match on this selection element, the value of the Path String  
2563 MUST be a *subsegment stem match* with the contents of the  
2564 `xrd:XRD/xrd:Service/xrd:Path` element. A subsegment stem match is defined as  
2565 the entire Path String being character-for-character equivalent with any continuous  
2566 sequence of subsegments or segments (including empty subsegments and empty  
2567 segments) in the contents of the Path element beginning from the most significant  
2568 (leftmost) subsegment. Subsegments and segments are formally defined in **[XRISyntax]**.  
2569 Any other result MUST be a NEGATIVE match on this selection element.



2570 Examples of this rule are shown in Table 26.

<b>QXRI (Path in bold)</b>	<b>XRD Path Element</b>	<b>Match</b>
@example	<Path match="null"/>	POSITIVE
@example	<Path></Path>	POSITIVE
@example	<Path>/</Path>	POSITIVE
@example/	<Path>/</Path>	POSITIVE
@example//	<Path>/</Path>	NEGATIVE
@example//	<Path>//</Path>	POSITIVE
@example//	<Path>/ <b>foo</b> </Path>	NEGATIVE
@example/ <b>foo</b>	<Path>/ <b>foo</b> </Path>	POSITIVE
@example// <b>foo</b>	<Path>/ <b>foo</b> </Path>	NEGATIVE
@example// <b>foo</b>	<Path>// <b>foo</b> </Path>	POSITIVE
@example/ <b>foo*bar</b>	<Path>/ <b>foo</b> </Path>	NEGATIVE
@example/ <b>foo*bar</b>	<Path>/ <b>foo*bar</b> </Path>	POSITIVE
@example/ <b>foo*bar</b>	<Path>/ <b>foo*bar</b> </Path>	POSITIVE
@example/ <b>foo*bar</b>	<Path>/ <b>foo*bar/baz</b> </Path>	POSITIVE
@example/ <b>foo*bar</b>	<Path>/ <b>foo*bar*baz</b> </Path>	POSITIVE
@example/ <b>foo*bar</b>	<Path>/ <b>foo*bar!baz</b> </Path>	POSITIVE
@example/ <b>foo*bar/</b>	<Path>/ <b>foo*bar</b> </Path>	NEGATIVE
@example/ <b>foo*bar/</b>	<Path>/ <b>foo*bar</b> </Path>	POSITIVE
@example/ <b>foo*bar/</b>	<Path>/ <b>foo*bar/baz</b> </Path>	POSITIVE
@example/ <b>foo*bar/</b>	<Path>/ <b>foo*bar*baz</b> </Path>	NEGATIVE
@example/ <b>foo!bar</b>	<Path>/ <b>foo*bar</b> </Path>	NEGATIVE
@example/ <b>foo!bar</b>	<Path>/ <b>foo!bar*baz</b> </Path>	POSITIVE
@example/( <b>+foo</b> )	<Path>/( <b>+foo</b> )</Path>	POSITIVE
@example/( <b>+foo</b> )*bar	<Path>/( <b>+foo</b> )</Path>	NEGATIVE
@example/( <b>+foo</b> )*bar	<Path>/( <b>+foo</b> )*bar</Path>	POSITIVE
@example/( <b>+foo</b> )*bar	<Path>/( <b>+foo</b> )*bar*baz</Path>	POSITIVE
@example/( <b>+foo</b> )!bar	<Path>/( <b>+foo</b> )*bar</Path>	NEGATIVE

2571 Table 26: Examples of applying the Path element matching rules.

### 2572 13.3.8 MediaType Element Matching Rules

2573 The following rules apply to matching the value of the input Service Media Type parameter with  
2574 the contents of of a non-empty `xrd:XRD/xrd:Service/xrd:MediaType` element when its  
2575 `match` attribute is absent.

- 2576 1. The values of the Service Media Type parameter and the `xrd:MediaType` element  
2577 SHOULD be normalized according to the rules for media types in section 3.7 of  
2578 [RFC2616] prior to input. (The rules are that media type and media type parameter  
2579 names are case-insensitive, but parameter values may or may not be case-sensitive  
2580 depending on the semantics of the parameter name. XRI Resolution Output Format  
2581 parameters and subparameters are all case-insensitive.) XRI resolvers MAY perform  
2582 normalization of these values but MUST NOT be required to do so.
- 2583 2. To be a POSITIVE match on this selection element, the values MUST be character-for-  
2584 character equivalent. Any other result is a NEGATIVE match on this selection element.

### 2585 13.4 Service Endpoint Matching Rules

2586 The next set of matching rules govern the matching of service endpoints based on the matches of  
2587 the selection elements they contain.

#### 2588 13.4.1 Service Endpoint Match Options

2589 For each service endpoint in an XRD, there are three match options as defined in Table 27:

Match Option	Condition
POSITIVE	Meets the Select Attribute Match Rule (section 13.4.2) or the All Positive Match Rule (section 13.4.3).
DEFAULT	Meets the Default Match Rule (section 13.4.4).
NEGATIVE	The service endpoint does not satisfy either condition above.

2590 *Table 27: Match options for service endpoints.*

#### 2591 13.4.2 Select Attribute Match Rule

2592 All three service endpoint selection elements accept the optional `select` attribute. This attribute  
2593 is a Boolean value used to govern matching of the containing service endpoint according to the  
2594 following rule. If service endpoint contains a selection element with a POSITIVE match as defined  
2595 in section 13.3, and the value of this selection element's `select` attribute is TRUE, the service  
2596 endpoint automatically MUST be a POSITIVE match, i.e., all other selection elements for this  
2597 service endpoint MUST be ignored.

#### 2598 13.4.3 All Positive Match Rule

2599 If a service endpoint has a POSITIVE match on all three categories of selection elements  
2600 (`xrd:Type`, `xrd:MediaType`, and `xrd:Path`) as defined in section 13.3, the service endpoint  
2601 MUST be a POSITIVE match. If even one of the three selection element match types is not  
2602 POSITIVE, this rule fails.

#### 2603 13.4.4 Default Match Rule

2604 If a service endpoint fails the Select Attribute Match Rule and the All Positive Match Rule, but  
2605 none of the three categories of selection elements has a NEGATIVE match as defined in section  
2606 13.3, the service endpoint MUST be a DEFAULT match.

## 2607 **13.5 Service Endpoint Selection Rules**

2608 The final set of rules governs the selection of service endpoints based on their matches.

### 2609 **13.5.1 Positive Match Rule**

2610 After applying the matching rules to service endpoints in section 13.4, all service endpoints that  
2611 have a POSITIVE match MUST be selected. Only if there are no service endpoints with a  
2612 POSITIVE match is the Default Match Rule invoked.

### 2613 **13.5.2 Default Match Rule**

2614 If the Positive Match Rule above fails, then the service endpoints with a DEFAULT match that  
2615 have the highest number of POSITIVE matches on each category of selection element MUST be  
2616 selected. This means:

- 2617 1. The service endpoints in the DEFAULT set that have two POSITIVE selection element  
2618 matches MUST be selected.
- 2619 2. If the previous set is empty, the service endpoints in the DEFAULT set that have one  
2620 POSITIVE selection element match MUST be selected.
- 2621 3. If the previous set is empty, all service endpoints in the DEFAULT set MUST be selected.
- 2622 4. If the previous set is empty, no service endpoint is selected and the return set is null.

## 2623 **13.6 Pseudocode**

2624 The following pseudocode provides a precise description of the service endpoint selection logic.  
2625 The pseudocode is normative, however if there is a conflict between it and the rules stated in the  
2626 preceding sections, the preceding sections shall prevail.

2627 The pseudocode uses nine Boolean flags to record the match state for each category of selection  
2628 element (SEL) in a service endpoint (SEP):

- 2629 • Positive.Type
- 2630 • Positive.Path
- 2631 • Positive.MediaType
- 2632 • Default.Type
- 2633 • Default.Path
- 2634 • Default.MediaType
- 2635 • Present.Type
- 2636 • Present.Path
- 2637 • Present.MediaType

2638 Note that the complete set of nine SEL match flags is needed for each SEP. The pseudocode first  
2639 does a loop through all SEPs in the XRD to:

- 2640 1. Set the SEL match flags according to the rules specified in section 13.3;
- 2641 2. Process the SEL match flags to apply the SEP matching rules specified in section 13.4;
- 2642 3. Apply the positive SEP selection rule specified in section 13.5.1.

2643 After this loop is complete, the pseudocode tests to see if default SEP selection processing is  
2644 required. If so, it performs a second loop applying the default SEP selection rules specified in  
2645 section 13.5.2.

2646

```
2647 FOR EACH SEP
2648 CREATE set of SEL match flags
2649 SET all flags to FALSE
2650 FOR EACH SEL of category x (where x=Type, Path, or Mediatype)
2651 SET Present.x=TRUE
2652 IF match on this SEL is POSITIVE
2653     IF select="true" ;see 12.4.2
2654         ADD SEP TO SELECTED SET
2655     NEXT SEP
2656 ELSE
2657     SET Positive.x=TRUE
2658 ENDIF
2659 ELSEIF match on this SEL is DEFAULT ;see 10.3.2 & 12.3.4
2660     IF Positive.x != TRUE AND
2661     nodefault != x ;see 12.3.5
2662         SET Default.x=TRUE
2663     ENDIF
2664 ENDIF
2665 ENDFOR
2666 IF Present.x=FALSE ;see 12.3.3
2667     IF nodefault_x != TRUE ;see 10.3.2
2668         SET Default.x=TRUE
2669     ENDIF
2670 ENDIF
2671 IF Positive.Type=TRUE AND
2672     Positive.Path=TRUE AND
2673     Positive.Mediatype=TRUE ;see 12.4.3
2674     ADD SEP TO SELECTED SET
2675     NEXT SEP
2676 ELSEIF SELECTED SET != EMPTY ;see 12.5.1
2677     NEXT SEP
2678 ELSEIF (Positive.Type=TRUE OR Default.Type=TRUE) AND
2679     (Positive.Path=TRUE OR Default.Path=TRUE) AND
2680     (Positive.MediaType=TRUE OR Default.MediaType=TRUE)
2681     ADD SEP TO DEFAULT SET ;see 12.4.4
2682 ENDIF
2683 ENDFOR
2684 IF SELECTED SET = EMPTY ;see 12.5.1
2685     FOR EACH SEP IN DEFAULT SET
2686         IF (Positive.Type=TRUE AND Positive.Path=TRUE) OR
2687         (Positive.Type=TRUE AND Positive.MediaType=TRUE) OR
2688         (Positive.Path=TRUE AND Positive.MediaType=TRUE)
2689             ADD SEP TO SELECTED SET
2690         ENDIF
2691     ENDFOR
2692 IF SELECTED SET = EMPTY
2693     FOR EACH SEP IN DEFAULT SET
2694         IF Positive.Type=TRUE OR
2695         Positive.Path=TRUE OR
2696         Positive.MediaType=TRUE
2697             ADD SEP TO SELECTED SET
2698         ENDIF
2699     ENDFOR
2700 ENDIF
2701 ENDIF
2702 IF SELECTED SET != EMPTY
2703     RETURN SELECTED SET
2704 ELSE
2705     RETURN DEFAULT SET
2706 ENDIF
```

## 2707 13.7 Construction of Service Endpoint URIs

2708 The final step in the service endpoint selection process is construction of the service endpoint  
2709 URI(s). This step is necessary if either:

- 2710 • The resolution output format is a URI List.
- 2711 • Automatic URI construction is requested using the `uric` parameter.

### 2712 13.7.1 The `append` Attribute

2713 The `append` attribute of a `xrd:XRD/xrd:Service/xrd:URI` element is used to specify how  
2714 the final URI is constructed. The values of this attribute are shown in Table 28.

Value	Component of QXRI to Append
none	None. This is the default if the <code>append</code> attribute is absent
local	The entire local part of the QXRI, defined as being one of three cases: a) If only a path is present, the Path String <i>including the leading forward slash</i> b) If only a query is present, the Query String <i>including the leading question mark</i> c) If both a path and a query are present, the entire combination of the Path String <i>including the leading forward slash</i> and the Query String <i>plus the leading question mark</i> Note that as defined in section 8.1.1, a fragment is never part of a QXRI.
authority	Authority String only (including the community root subsegment) <i>not including the trailing forward slash</i>
path	Path String <i>including the leading forward slash</i>
query	Query String <i>including the leading question mark</i>
qxri	Entire QXRI

2715 Table 28: Values of the `append` attribute and the corresponding QXRI component to append.

2716 If the `append` attribute is absent, the default value is `none`. Following are the rules for  
2717 construction of the final service endpoint URI based on the value of the `append` attribute.

2718 **IMPORTANT:** Implementers must follow these rules exactly in order to give XRDS authors  
2719 precise control over construction of service endpoint URIs.

- 2720 1. If the value is `none`, the exact contents of the `xrd:URI` element **MUST** be returned  
2721 directly without any further processing.
- 2722 2. For any other value, the exact value in URI-normal form of the QXRI component specified  
2723 in Table 28, *including any leading delimiter(s) and without any additional escaping or*  
2724 *percent encoding* **MUST** be appended directly to the exact contents of the `xrd:URI`  
2725 element *including any trailing delimiter(s)*. If the value of the QXRI component specified in  
2726 Table 28 consists of only a leading delimiter, then this value **MUST** be appended  
2727 according to these rules. If the value of the QXRI component specified in Table 28 is null,  
2728 then the contents of the `xrd:URI` element **MUST** be returned directly exactly as if the  
2729 value of the `append` attribute was `none`.

2730 3. If any HXRI query parameters for proxy resolution were added to an existing QXRI query  
2731 component as defined in section 11.3, these query parameters MUST be removed prior  
2732 to performing the append operation as also defined in section 11.3. In particular, if after  
2733 removal of these query parameters the QXRI query component consists of only a *string*  
2734 of one or more question marks (the delimiting question mark plus zero or more additional  
2735 question marks) then *exactly one question mark* MUST also be removed. This preserves  
2736 the query component of the original QXRI if it was null or contained only question marks.

2737 **IMPORTANT:** Construction of HTTP(S) URIs for authority resolution service endpoints is defined  
2738 in section 9.1.10. Note that this involves an additional step taken after all URI construction steps  
2739 specified in this section are complete. In other words, if the URI element of an authority resolution  
2740 service endpoint includes an `append` attribute, the Next Authority Resolution Service URI MUST  
2741 be fully constructed according to the algorithm in this section before appending the Next Authority  
2742 String as defined in section 9.1.10.

2743 **WARNING:** Use of any value of the `append` attribute other than `authority` on the URI element  
2744 for an authority resolution service endpoint is NOT RECOMMENDED due to the complexity it  
2745 introduces.

### 2746 13.7.2 The `uric` Parameter

2747 The `uric` subparameter of the Resolution Output Format is used to govern whether a resolver  
2748 should perform construction of the URI automatically on behalf of a consuming application.  
2749 Following are the processing rules for this parameter:

- 2750 1. If `uric=true`, a resolver MUST apply the URI construction rules specified in section  
2751 13.7.1 to each `xrd:XRD/xrd:Service/xrd:URI` element in the final XRD in the  
2752 resolution chain. Note that this step is identical to the processing a resolver must perform  
2753 to output a URI list.
- 2754 2. The resolver MUST replace the value of each `xrd:XRD/xrd:Service/xrd:URI`  
2755 element in the final XRD with the fully constructed URI value.
- 2756 3. The resolver MUST subsequently remove the `append` attribute from each  
2757 `xrd:XRD/xrd:Service/xrd:URI` element in the final XRD.
- 2758 4. If `uric=false` or the parameter is absent or empty, a resolver MUST NOT perform any  
2759 of the processing specified in this section.

2760

## 14 Synonym Verification

2761 As described in section 5, a consuming application must be able to verify the security of the  
2762 binding between the fully-qualified query identifier (the identifier resolved to an XRDS document)  
2763 and any synonyms asserted in the final XRD. This section defines synonym verification rules.

### 14.1 Redirect Verification

2765 As specified in section 12.3, XRI resolvers MUST verify the synonyms asserted in the XRD  
2766 obtained by following a Redirect element. These rules are:

- 2767 1. If resolution of the Redirect succeeds, the resolver MUST first verify that the set of XRD  
2768 synonym elements (as specified in section 5.2) contained in the new XRD are *equivalent*  
2769 *to or a subset of* those contained in the XRD containing the Redirect.
- 2770 2. Secondly, the resolver MUST verify that the content of each synonym element contained  
2771 in the new XRD is exactly equivalent to the content of the corresponding element in the  
2772 XRD containing the Redirect.
- 2773 3. If either rule above fails, the resolver MUST stop and return the error 253  
2774 REDIRECT\_VERIFY\_FAILED in the XRD where the error occurred or as a plain text error  
2775 message as defined in section 15.

2776 For examples see section 12.5.1.

### 14.2 EquivID Verification

2778 Although XRI resolvers do not automatically perform EquivID synonym verification, a consuming  
2779 application can easily request it using the following steps:

- 2780 1. First request resolution for the original query identifier with CanonicalID verification  
2781 enabled (`cid=true`).
- 2782 2. From the final XRD in the resolution chain, select the EquivID for which verification is  
2783 desired.
- 2784 3. Request resolution of the EquivID identifier.
- 2785 4. From the final XRD in this second resolution chain, determine if there is either: a) a  
2786 `xrd:XRD/xrd:EquivID` element, or b) a `xrd:XRD/xrd:CanonicalEquivID` element  
2787 whose value matches the verified CanonicalID of the original query identifier. If there is a  
2788 match, the EquivID is verified; otherwise it is not verified.

#### Example:

- 2790 • Fully-Qualified Query Identifier: `http://example.com/user`
- 2791 • Asserted EquivID: `xri://=!1000.c78d.402a.8824.bf20`

2792 First XRDS (for `http://example.com/user` — simplified for illustration purposes):

```
2793 <XRDS>  
2794 <XRD>  
2795 <EquivID>xri://=!1000.c78d.402a.8824.bf20</EquivID>  
2796 <CanonicalID>http://example.com/user</CanonicalID>  
2797 <Service priority="10">  
2798 ...  
2799 </Service>  
2800 ...  
2801 </XRD>  
2802 </XRDS>
```

2803 Second XRDS (for `xri://=!1000.c78d.402a.8824.bf20`):

```
2804 <XRDS>
2805 <XRD>
2806 <Query>!1000.c78d.402a.8824.bf20</Query>
2807 <ProviderID>xri://=</ProviderID>
2808 <EquivID>http://example.com/user</EquivID>
2809 <CanonicalID>xri://=!1000.c78d.402a.8824.bf20</CanonicalID>
2810 <Service priority="10">
2811 ...
2812 </Service>
2813 ...
2814 </XRD>
2815 </XRDS>
```

2816 The EquivID is verified because the XRD in the second XRDS asserts an EquivID backpointer to  
2817 the CanonicalID of the XRD in the first XRDS.

## 2818 14.3 CanonicalID Verification

2819 XRI resolvers automatically perform verification of CanonicalID and CanonicalEquivID synonyms  
2820 unless this function is explicitly turned off using the Resolution Output Format subparameter `cid`.  
2821 The following synonym verification MUST be applied by an XRI resolver if `cid=true` or the  
2822 parameter is absent or empty, and MUST NOT be applied if `cid=false`.

- 2823 1. If the value of the `xrd:XRD/xrd:CanonicalID` element is an HTTP(S) URI, it MUST  
2824 be verified as specified in section 14.3.1.
- 2825 2. If the value of the `xrd:XRD/xrd:CanonicalID` element is an XRI, it MUST be verified  
2826 as specified in section 14.3.2.
- 2827 3. If the value of the `xrd:XRD/xrd:CanonicalID` element is any other identifier,  
2828 CanonicalID verification fails and the resolver MUST return the CanonicalID verification  
2829 status specified in section 14.3.4.
- 2830 4. If CanonicalID verification succeeds but the final XRD in the resolution chain also  
2831 contains a `xrd:XRD/xrd:CanonicalEquivID` element, it MUST also be verified as  
2832 specified in section 14.3.3, and the resolver MUST return the CanonicalEquivID  
2833 verification status as specified in section 14.3.4.
- 2834 5. In all cases, since synonym verification depends on trusting each authority in the  
2835 resolution chain, trusted resolution (section 10) SHOULD be used with either  
2836 `https=true` or `saml=true` or both to provide additional assurance of the authenticity of  
2837 the results.

2838 **IMPORTANT:** There is no guarantee that all XRDS that describe the same target resource will  
2839 return the same verified CanonicalID or CanonicalEquivID. Different parent authorities may assert  
2840 different CanonicalIDs or CanonicalEquivIDs for the same target resource and all of these may all  
2841 be verifiable. In addition, due to Redirect and Ref processing, the verified CanonicalID or  
2842 CanonicalEquivID returned for an XRI MAY differ depending on the resolution input parameters.  
2843 For example, as described in section 12, a request for a specific service endpoint type may  
2844 trigger processing of a Redirect or Ref resulting in a nested XRDS document. The final XRD in  
2845 the nested XRDS document may come from a different parent authority and have a different but  
2846 still verifiable CanonicalID or CanonicalEquivID.



### 2847 14.3.1 HTTP(S) URI Verification Rules

2848 To verify that an HTTP(S) URI is a valid CanonicalID synonym for a fully-qualified query identifier  
2849 (defined in section 5.1), a resolver MUST verify that all the following tests are successful:

- 2850 1. The fully-qualified query identifier MUST also be an HTTP(S) URI.
- 2851 2. The query identifier MUST be resolved as specified in section 6.
- 2852 3. The asserted CanonicalID synonym MUST be an HTTP(S) URI equivalent to: a) the fully-  
2853 qualified query identifier, or b) the fully-qualified query identifier plus a valid fragment as  
2854 defined by [RFC3986].

2855 See the example in section 14.3.5.

### 2856 14.3.2 XRI Verification Rules

2857 To verify that an XRI is a valid CanonicalID synonym for a fully-qualified query identifier (defined  
2858 in section 5.1), a resolver MUST verify that all the following tests are successful.

- 2859 1. In the first XRD in the resolution chain, the value of the `xrd:XRD/xrd:CanonicalID`  
2860 element MUST consist of two parts:
  - 2861 1) The value of the `xrd:XRD/xrd:CanonicalID` element for the community root  
2862 authority as configured in the XRI resolver or asserted in a self-describing XRD  
2863 from the community root authority (or its equivalent). See section 9.1.6.
  - 2864 2) One additional XRI subsegment as defined in [XRISyntax]. For example, if the  
2865 value of the `xrd:XRD/xrd:CanonicalID` element for the community root  
2866 authority was @, then the following would all be verified values for the  
2867 `xrd:XRD/xrd:CanonicalID` element in the first XRD in the resolution chain:  
2868 @!1, @!1234, @!example, @example (note that @example is not  
2869 recommended because it is not a persistent identifier).
- 2870 2. For each subsequent XRD in the resolution chain, the value of the  
2871 `xrd:XRD/xrd:CanonicalID` element MUST consist of the value the  
2872 `xrd:XRD/xrd:CanonicalID` element of the preceding XRD in the same XRDS  
2873 document plus one additional XRI subsegment. For example, if the value of the  
2874 `xrd:XRD/xrd:CanonicalID` element asserted in an XRD is @!1!2!3, then the value  
2875 of the `xrd:XRD/xrd:CanonicalID` element in the immediately preceding XRD in the  
2876 same XRDS document must be @!1!2.
- 2877 3. If Redirect or Ref processing is required during resolution as specified in section 12, the  
2878 rules above MUST also apply for each nested XRDS document.

Comment [DSR6]: Revised to remove ProviderID correlation requirement (deemed unnecessary) per suggestion from Wil Tan.

2879 **IMPORTANT:** Each set of XRDs in each new nested XRDS document produced as a result of  
2880 Redirect or Ref processing constitutes its own CanonicalID verification chain. *CanonicalID*  
2881 *verification never crosses between XRDS documents.* See the examples in section 12.5.

### 2882 14.3.3 CanonicalEquivID Verification

2883 CanonicalID verification also requires verification of a CanonicalEquivID *only if it is present in the*  
2884 *final XRD in the resolution chain.* Since CanonicalEquivID verification typically requires an extra  
2885 resolution cycle, restricting automatic verification to the final XRD in the resolution chain ensures  
2886 it will add at most one additional resolution cycle.

2887 CanonicalEquivID verification MUST NOT be performed unless CanonicalID verification as  
2888 specified in section 14.3 has completed successfully. The resulting value is called the *verified*  
2889 *CanonicalID*.

2890 To verify that a CanonicalEquivID is an authorized synonym for a verified CanonicalEquivID, a  
2891 resolver MUST verify that either: a) the value of the CanonicalEquivID element is character-by-  
2892 character equivalent to the verified CanonicalID (since both appear in the same XRD, all other  
2893 normalization rules are waived), or b) that all the following tests are successful:

- 2894 1. The asserted CanonicalEquivID value MUST be a valid HTTP(S) URI or XRI.
- 2895 2. The asserted CanonicalEquivID value MUST resolve successfully to an XRDS document  
2896 according to the rules in this specification *using the same resolution parameters as in the*  
2897 *original resolution request.*
- 2898 3. The CanonicalID in the final XRD of the resolved XRDS document MUST be verified and  
2899 MUST be equivalent to the asserted CanonicalEquivID.
- 2900 4. The final XRD in the resolved XRDS document MUST contain either an EquivID or a  
2901 CanonicalEquivID "backpointer" whose value is equivalent to the verified CanonicalID in  
2902 the XRD asserting the CanonicalEquivID.

2903 SPECIAL SECURITY CONSIDERATION: See section 5.2.2 regarding the rules for provisioning  
2904 of `xrd:XRD/xrd:EquivID` and `xrd:XRD/xrd:CanonicalEquivID` elements in an XRD.

### 2905 14.3.4 Verification Status Attributes

2906 If CanonicalID verification is performed, an XRI resolver MUST return the CanonicalID and  
2907 CanonicalEquivID verification status using an attribute of the `xrd:XRD/xrd:Status` element in  
2908 each XRD in the output as follows:

- 2909 1. CanonicalID verification MUST be reported using the `cid` attribute.
- 2910 2. CanonicalEquivID verification MUST be reported using the `ceid` attribute.
- 2911 3. Both attributes accept four enumerated values: `absent` if the element is not present, `off`  
2912 if verification is not performed, `verified` if the element is verified, and `failed` if  
2913 verification fails.
- 2914 4. The `off` value applies to both elements if CanonicalID verification is not performed  
2915 (`cid=false`).
- 2916 5. The `off` value applies to the CanonicalEquivID element in any XRD before the final XRD  
2917 if CanonicalID verification is performed (`cid=true`), because a resolver only verifies this  
2918 element in the final XRD.
- 2919 6. If `cid=true` and verification of any CanonicalID element fails, *verification of all*  
2920 *CanonicalIDs in all subsequent XRDs in the same XRDS document MUST fail.*

2921 From these verification status attributes, a consuming application can confirm on every XRD in  
2922 the XRDS document whether the CanonicalID is present and has been verified. In addition, for  
2923 the final XRD in the XRDS document, it can confirm whether the CanonicalEquivID element is  
2924 present and has been verified.

## 2925 14.3.5 Examples

### 2926 Example #1:

- 2927 • Fully-Qualified Query Identifier: `http://example.com/user`
- 2928 • Asserted CanonicalID: `http://example.com/user#1234`

2929 XRDS (simplified for illustration purposes):

```
2930 <XRDS ref="http://example.com/user">
2931 <XRD>
2932 <CanonicalID>http://example.com/user#1234</CanonicalID>
2933 <Service priority="10">
2934   ...
2935 </Service>
2936   ...
2937 </XRD>
2938 </XRDS>
```

2939 The asserted CanonicalID satisfies the HTTP(S) URI verification rules in section 14.3.1.

2940

---

### 2941 Example #2:

- 2942 • Fully-Qualified Query Identifier: `=example.name*delegate.name`
- 2943 • Asserted CanonicalID: `!=1000.62b1.44fd.2855!1234`

2944 XRDS (for `=example.name*delegate.name`):

```
2945 <XRDS ref="xri://=example.name*delegate.name">
2946 <XRD>
2947 <Query>*example.name</Query>
2948 <ProviderID>xri://=</ProviderID>
2949 <LocalID>!1000.62b1.44fd.2855</LocalID>
2950 <CanonicalID>xri://=!1000.62b1.44fd.2855</CanonicalID>
2951 <Service>
2952 <ProviderID>xri://=!1000.62b1.44fd.2855</ProviderID>
2953 <Type>xri://$res*auth*($v*2.0)</Type>
2954 <MediaType>application/xrds+xml</MediaType>
2955 <URI priority="10">http://resolve.example.com</URI>
2956 <URI priority="15">http://resolve2.example.com</URI>
2957 <URI>https://resolve.example.com</URI>
2958 </Service>
2959   ...
2960 </XRD>
2961 <XRD>
2962 <Query>*delegate.name</Query>
2963 <ProviderID>xri://=!1000.62b1.44fd.2855</ProviderID>
2964 <LocalID>!1234</LocalID>
2965 <CanonicalID>xri://=!1000.62b1.44fd.2855!1234</CanonicalID>
2966 <Service priority="1">
2967   ...
2968 </Service>
2969   ...
2970 </XRD>
2971 </XRDS>
```

2972 The asserted CanonicalID satisfies the XRI verification rules in section 14.3.2.

2973

---

2974 **Example #3:**

- 2975 • Fully-Qualified Query Identifier: `http://example.com/user`
- 2976 • Asserted CanonicalID: `http://example.com/user`
- 2977 • Asserted CanonicalEquivID: `https://different.example.net/path/user`

2978 First XRDS (for `http://example.com/user`):

```
2979 <XRDS ref="http://example.com/user">
2980 <XRD>
2981 <CanonicalID>http://example.com/user</CanonicalID>
2982 <CanonicalEquivID>
2983 https://different.example.net/path/user
2984 </CanonicalEquivID>
2985 <Service priority="10">
2986 ...
2987 </Service>
2988 ...
2989 </XRD>
2990 </XRDS>
```

2991 Second XRDS (for `https://different.example.net/path/user`):

```
2992 <XRDS ref="https://different.example.net/path/user">
2993 <XRD>
2994 <EquivID>http://example.com/user</EquivID>
2995 <CanonicalID>https://different.example.net/path/user</CanonicalID>
2996 <Service priority="10">
2997 ...
2998 </Service>
2999 ...
3000 </XRD>
3001 </XRDS>
```

3002 The CanonicalEquivID asserted in the first XRDS satisfies the verification rules in section 14.3.3  
3003 because it resolves to a second XRDS that asserts an EquivID backpointer to the CanonicalID of  
3004 the first XRDS.

3005

---

3006 **Example #4:**

- 3007 • Fully-Qualified Query Identifier: `http://example.com/user`
- 3008 • Asserted CanonicalID: `http://example.com/user`
- 3009 • Asserted CanonicalEquivID: `!=1000.62b1.44fd.2855`

3010 XRDS (for `http://example.com/user`):

```
3011 <XRDS ref="http://example.com/user">
3012 <XRD>
3013 <CanonicalID>http://example.com/user</CanonicalID>
3014 <CanonicalEquivID>xri://!=1000.62b1.44fd.2855</CanonicalEquivID>
3015 <Service priority="10">
3016 ...
3017 </Service>
3018 ...
3019 </XRD>
3020 </XRDS>
```

3021 XRDS (for xri://=!1000.62b1.44fd.2855):

```
3022 <XRDS ref="xri://=!1000.62b1.44fd.2855">
3023   <XRD>
3024     <Query>!1000.62b1.44fd.2855</Query>
3025     <ProviderID>xri://=</ProviderID>
3026     <EquivID>http://example.com/user</EquivID>
3027     <CanonicalID>xri://=!1000.62b1.44fd.2855</CanonicalID>
3028     <Service priority="10">
3029       ...
3030     </Service>
3031     ...
3032   </XRD>
3033 </XRDS>
```

3034 The CanonicalEquivID asserted in the first XRDS satisfies the verification rules in section 14.3.3  
3035 because it resolves to a second XRDS that asserts an EquivID backpointer to the CanonicalID of  
3036 the first XRDS.

3037

---

3038 **Example #5:**

- 3039 • Fully-Qualified Query Identifier: =example.name
- 3040 • Asserted CanonicalID: xri://=!1000.62b1.44fd.2855
- 3041 • Asserted CanonicalEquivID: https://example.com/user

3042 First XRDS (for =example.name):

```
3043 <XRDS ref="xri://=example.name">
3044   <XRD>
3045     <Query>*example.name</Query>
3046     <ProviderID>xri://=</ProviderID>
3047     <LocalID>!1000.62b1.44fd.2855</LocalID>
3048     <CanonicalID>xri://=!1000.62b1.44fd.2855</CanonicalID>
3049     <CanonicalEquivID>https://example.com/user</CanonicalEquivID>
3050     <Service priority="10">
3051       ...
3052     </Service>
3053     ...
3054   </XRD>
3055 </XRDS>
```

3056 Second XRDS (for https://example.com/user):

```
3057 <XRDS ref="https://example.com/user">
3058   <XRD>
3059     <EquivID>xri://=!1000.62b1.44fd.2855</EquivID>
3060     <CanonicalID>https://example.com/user</CanonicalID>
3061     <Service priority="10">
3062       ...
3063     </Service>
3064     ...
3065   </XRD>
3066 </XRDS>
```

3067 The CanonicalEquivID asserted in the first XRDS satisfies the verification rules in section 14.3.3  
3068 because it resolves to a second XRDS that asserts an EquivID backpointer to the CanonicalID of  
3069 the first XRDS.

3070

3071 **Example #6:**

- 3072 • Fully-Qualified Query Identifier: =example.name\*delegate.name
- 3073 • Asserted CanonicalID: xri://=!1000.62b1.44fd.2855!1234
- 3074 • Asserted CanonicalEquivID: @!1000.f3da.9056.aca3!5555

3075 First XRDS (for =example.name\*delegate.name):

```
3076 <XRDS ref="xri://=example.name*delegate.name">
3077   <XRD>
3078     <Query>*example.name</Query>
3079     <ProviderID>xri://=</ProviderID>
3080     <LocalID>!1000.62b1.44fd.2855</LocalID>
3081     <CanonicalID>xri://=!1000.62b1.44fd.2855</CanonicalID>
3082     <Service>
3083       <ProviderID>xri://=!1000.62b1.44fd.2855</ProviderID>
3084       <Type>xri://$res*auth*($v*2.0)</Type>
3085       <MediaType>application/xrds+xml</MediaType>
3086       <URI priority="10">http://resolve.example.com</URI>
3087       <URI priority="15">http://resolve2.example.com</URI>
3088       <URI>https://resolve.example.com</URI>
3089     </Service>
3090     ...
3091   </XRD>
3092   <XRD>
3093     <Query>*delegate.name</Query>
3094     <ProviderID>xri://=!1000.62b1.44fd.2855</ProviderID>
3095     <LocalID>!1234</LocalID>
3096     <CanonicalID>xri://=!1000.62b1.44fd.2855!1234</CanonicalID>
3097     <CanonicalEquivID>
3098       xri://@1000.f3da.9056.aca3!5555
3099     </CanonicalEquivID>
3100     <Service priority="1">
3101       ...
3102     </Service>
3103     ...
3104   </XRD>
3105 </XRDS>
```

3106 • Second XRDS (for @!1000.f3da.9056.aca3!5555):

```
3107 <XRDS ref="xri://@!1000.f3da.9056.aca3!5555">
3108   <XRD>
3109     <Query>!1000.f3da.9056.aca3</Query>
3110     <ProviderID>xri://@</ProviderID>
3111     <CanonicalID>xri://@!1000.f3da.9056.aca3</CanonicalID>
3112     <Service>
3113       <ProviderID>xri://@!1000.f3da.9056.aca3</ProviderID>
3114       <Type>xri://$res*auth*($v*2.0)</Type>
3115       <MediaType>application/xrds+xml</MediaType>
3116       <URI priority="10">http://resolve.example.com</URI>
3117       <URI priority="15">http://resolve2.example.com</URI>
3118       <URI>https://resolve.example.com</URI>
3119     </Service>
3120     ...
3121   </XRD>
3122   <XRD>
3123     <Query>!5555</Query>
3124     <ProviderID>xri://@!1000.f3da.9056.aca3</ProviderID>
3125     <LocalID>!5555</LocalID>
3126     <EquivID>xri://=!1000.62b1.44fd.2855!1234</EquivID>
```

```
3127 <CanonicalID>xri://@!1000.f3da.9056.aca3!5555</CanonicalID>
3128 <Service priority="1">
3129   ...
3130 </Service>
3131   ...
3132 </XRD>
3133 </XRDS>
```

3134 The CanonicalEquiVID asserted in the final XRD of the first XRDS satisfies the verification rules  
3135 in section 14.3.3 because it resolves to a second XRDS whose final XRD asserts an EquiVID  
3136 backpointer to the CanonicalID of the final XRD in the first XRDS.

3137

## 15 Status Codes and Error Processing

3138

### 15.1 Status Elements

3139

XRDS architecture uses two XRD elements for status reporting:

3140

- The `xrd:XRD/xrd:ServerStatus` element is used by an authority server to report the server-side status of a resolution query to a resolver.

3141

3142

- The `xrd:XRD/xrd:Status` element is used by a resolver to report the client-side status of a resolution query to a consuming application. Note that attributes and contents of this element MAY differ from those of the `xrd:XRD/xrd:ServerStatus` element due to either client-side error detection or reporting of CanonicalID verification status (section 14.3.4).

3143

3144

3145

3146

Following are the normative rules that apply to usage of these elements:

3147

1. For XRDS servers and clients, each of these elements is OPTIONAL.

3148

2. An XRI authority server is REQUIRED to include an `xrd:XRD/xrd:ServerStatus` element for each XRD in a resolution response.

3149

3150

**BACKWARDS COMPATIBILITY NOTE:** The `xrd:XRD/xrd:ServerStatus` element was not included in earlier versions of this specification. If an older authority resolution server does not produce this element in generic or HTTPS trusted resolution, a resolver SHOULD generate it. For SAML trusted resolution, a resolver MUST NOT generate it.

3151

3152

3153

3154

3. An XRI resolver is REQUIRED to add an `xrd:XRD/xrd:Status` element to each XRD if the Resolution Output Format is an XRDS document or an XRD element.

3155

3156

4. In SAML trusted resolution, a resolver MUST verify the SAML signature on the XRD received from the server as specified in section 10.2.4 before adding the `xrd:XRD/xrd:Status` element to the XRD. Because this modifies the XRD, a consuming application may not be able to easily verify the SAML signature itself. Should this be necessary, the consuming application may request the XRD it wishes to verify directly from an authority server using the SAML trusted resolution protocol in section 10.2.

3157

3158

3159

3160

3161

3162

3163

5. These elements MUST include the status codes specified in section 15.2 as the value of the required `code` attribute.

3164

3165

6. These elements SHOULD contain the status context strings specified in section 15.3. Authority servers or resolvers MAY add additional information to status context strings.

3166

3167

### 15.2 Status Codes

3168

XRI resolution status codes are patterned after the HTTP model. They are broken into three major categories:

3169

3170

- 1xx: Success—the requested resolution operation was completed successfully.

3171

- 2xx: Permanent errors—the resolver encountered an error from which it could not recover.

3172

- 3xx: Temporary errors—the resolver encountered an error condition that may be only temporary.

3173



- 3174 The 2xx and 3xx categories are broken into seven minor categories:
- 3175 • x0x: General error that may take place during any phase of resolution.
- 3176 • x1x: Input error
- 3177 • x2x: Generic authority resolution error.
- 3178 • x3x: Trusted authority resolution error.
- 3179 • x4x: Service endpoint (SEP) selection error.
- 3180 • x5x: Redirect error.
- 3181 • x6x: Ref error.

3182 The full list of XRI resolution status codes is defined in Table 29.

3183

Code	Symbolic Status	Phase(s)	Description
100	SUCCESS	Any	Operation was successful.
200	PERM_FAIL	Any	Generic permanent failure.
201	NOT_IMPLEMENTED	Any	The requested function (trusted resolution, service endpoint selection) is not implement by the resolver.
202	LIMIT_EXCEEDED	Any	A locally configured resource limit was exceeded. Examples: number of Redirect or Refs to follow, number of XRD elements that can be handled, size of an XRDS document.
210	INVALID_INPUT	Input	Generic input error.
211	INVALID_QXRI	Input	Input QXRI does not conform to XRI syntax.
212	INVALID_OUTPUT_FORMAT	Input	Input Resolution Output Format is invalid.
213	INVALID_SEP_TYPE	Input	Input Service Type is invalid.
214	INVALID_SEP_MEDIA_TYPE	Input	Input Service Media Type is invalid.
215	UNKNOWN_ROOT	Input	Community root specified in QXRI is not configured in the resolver.
220	AUTH_RES_ERROR	Authority resolution	Generic authority resolution error.
221	AUTH_RES_NOT_FOUND	Authority resolution	The subsegment cannot be resolved due to a missing authority resolution service endpoint in an XRD.
222	QUERY_NOT_FOUND	Authority resolution	Responding authority does not have an XRI matching the query.
223	UNEXPECTED_XRD	Authority resolution	Value of the <code>xrd:Query</code> element does not match the subsegment requested.
224	INACTIVE	Authority resolution	The query XRI has been assigned but the authority does not provide resolution metadata.

230	TRUSTED_RES_ERROR	Trusted resolution	Generic trusted resolution error.
231	HTTPS_RES_NOT_FOUND	Trusted resolution	The resolver was unable to locate an HTTPS authority resolution endpoint.
232	SAML_RES_NOT_FOUND	Trusted resolution	The resolver was unable to locate a SAML authority resolution endpoint.
233	HTTPS+SAML_RES_NOT_FOUND	Trusted resolution	The resolver was unable to locate an HTTPS+SAML authority resolution endpoint.
234	UNVERIFIED_SIGNATURE	Trusted resolution	Signature verification failed.
240	SEP_SELECTION_ERROR	SEP selection	Generic service endpoint selection error.
241	SEP_NOT_FOUND	SEP selection	The requested service endpoint could not be found in the current XRD or via Redirect or Ref processing.
250	REDIRECT_ERROR	Redirect Processing	Generic Redirect error.
251	INVALID_REDIRECT	Redirect Processing	At least one Redirect element was found but resolution failed.
252	INVALID_HTTPS_REDIRECT	Redirect Processing	<code>https=true</code> but a Redirect element containing an HTTPS URI was not found.
253	REDIRECT_VERIFY_FAILED	Redirect Processing	Synonym verification failed in an XRD after following a redirect. See section 12.3
260	REF_ERROR	Ref Processing	Generic Ref processing error.
261	INVALID_REF	Ref Processing	A valid Ref XRI was not found.
262	REF_NOT_FOLLOWED	Ref Processing	At least one Ref was present but the <code>refs</code> parameter was set to <code>false</code> .
300	TEMPORARY_FAIL	Any	Generic temporary failure.
301	TIMEOUT_ERROR	Any	Locally-defined timeout limit has lapsed during an operation (e.g. network latency).
320	NETWORK_ERROR	Authority resolution	Generic error during authority resolution phase (includes uncaught exception, system error, network error).
321	UNEXPECTED_RESPONSE	Authority resolution	When querying an authority server, the server returned a non-200 HTTP status.
322	INVALID_XRDS	Authority resolution	Invalid XRDS received from an authority server (includes malformed XML, truncated content, or wrong content type).

3185 Table 29: Error codes for XRI resolution.

### 3186 **15.3 Status Context Strings**

3187 Each status code in Table 29 MAY be returned with an optional status context string that provides  
3188 additional human-readable information about the status or error condition. When the Resolution  
3189 Output Format is an XRDS document or XRD element, this string is returned as the contents of  
3190 the `xrd:XRD/xrd:ServerStatus` and `xrd:XRD/xrd:Status` elements. When the  
3191 Resolution Output Format is a URI List, this string MUST be returned as specified in section 15.4.  
3192 Implementers SHOULD provide error context strings with additional information about an error  
3193 and possible solutions whenever it can be helpful to developers or end users.

### 3194 **15.4 Returning Errors in Plain Text or HTML**

3195 If the Resolution Output Format is a URI List as defined in section 8.2, an error MUST be  
3196 returned with the content type `text/plain`. In this content:

- 3197 • The first line MUST consist of only the numeric error code as defined in section 15.2 followed  
3198 by a CRLF.
- 3199 • The second line is RECOMMENDED; if present it MUST contain the error context string as  
3200 defined in section 15.3.

3201 The same rules apply if the Resolution Output Format is an HTTP(S) Redirect as defined in  
3202 section 8.2, except the media type MAY also be `text/html`. It is particularly important in this  
3203 case to return an error message that will be understandable to an end-user who may have no  
3204 knowledge of XRI resolution or the fact that the error is coming from an XRI proxy resolver.

### 3205 **15.5 Error Handling in Recursing and Proxy Resolution**

3206 In recursing and proxy resolution (sections 9.1.8 and 11), a server is acting as a client resolver for  
3207 other authority resolution service endpoints. If in this intermediary capacity it receives an  
3208 unrecoverable error, it MUST return the error to the originating client in the output format  
3209 specified by the value of the requested Resolution Output Format as defined in section 8.2.

3210 If the output format is an XRDS document, it MUST contain `xrd:XRD` elements for all  
3211 subsegments successfully resolved or retrieved from cache prior to the error. Each XRD MUST  
3212 include the `xrd:ServerStatus` element as reported by the authoritative server. The final  
3213 `xrd:XRD` element MUST include the `xrd:Query` element that produced the error and the  
3214 `xrd:Status` element that describes the error as defined above.

3215 If the output format is an XRD element, it MUST include the `xrd:Query` element that produced  
3216 the error, the `xrd:ServerStatus` element as reported by the authoritative server, and the  
3217 `xrd:Status` element that describes the error as defined above.

3218 If this output format is a URI List or an HTTP(S) redirect, a proxy resolver SHOULD return a  
3219 human-readable error message as specified in section 15.4.

---

## 3220 16 Use of HTTP(S)

### 3221 16.1 HTTP Errors

3222 When a resolver encounters fatal HTTP(S) errors during the resolution process, it **MUST** return  
3223 the appropriate XRI resolution error code and error message as defined in section 15. In this way  
3224 calling applications do not have to deal separately with XRI and HTTP error messages.

### 3225 16.2 HTTP Headers

#### 3226 16.2.1 Caching

3227 The HTTP caching capabilities described by **[RFC2616]** should be leveraged for all XRDS and  
3228 XRI resolution protocols. Specifically, implementations **SHOULD** implement the caching model  
3229 described in section 13 of **[RFC2616]**, and in particular, the “Expiration Model” of section 13.2, as  
3230 this requires the fewest round-trip network connections.

3231 All XRI resolution servers **SHOULD** send the Cache-Control or Expires headers in their  
3232 responses per section 13.2 of **[RFC2616]** unless there are overriding security or policy reasons to  
3233 omit them.

3234 Note that HTTP Cache headers **SHOULD NOT** conflict with expiration information in an XRD.  
3235 That is, the expiration date specified by HTTP caching headers **SHOULD NOT** be later than any  
3236 of the expiration dates for any of the `xrd:Expires` elements returned in the HTTP response.  
3237 This implies that recursing and proxy resolvers **SHOULD** compute the “soonest” expiration date  
3238 for the XRDs in a resolution chain and ensure a later date is not specified by the HTTP caching  
3239 headers for the HTTP response.

#### 3240 16.2.2 Location

3241 During HTTP interaction, “Location” headers may be present per **[RFC2616]** (i.e., during 3XX  
3242 redirects). Redirects **SHOULD** be made cacheable through appropriate HTTP headers, as  
3243 specified in section 16.2.1.

#### 3244 16.2.3 Content-Type

3245 For authority resolution, the Content-Type header in the 2XX responses **MUST** contain the media  
3246 type identifier values specified in Table 11 (for generic resolution), Table 15 (for HTTPS trusted  
3247 resolution), Table 16 (for SAML trusted resolution), or Table 17 (or HTTPS+SAML trusted  
3248 resolution).

3249 Following the optional service endpoint selection phase, clients and servers **MAY** negotiate  
3250 content type using standard HTTP content negotiation features. Regardless of whether this  
3251 feature is used, however, the server **MUST** respond with an appropriate media type in the  
3252 Content-Type header if the resource is found and an appropriate content type is returned.

### 3253 16.3 Other HTTP Features

3254 HTTP provides a number of other features including transfer-coding, proxying, validation-model  
3255 caching, and so forth. All these features may be used insofar as they do not conflict with the  
3256 required uses of HTTP described in this document.

## 3257 16.4 Caching and Efficiency

### 3258 16.4.1 Resolver Caching

3259 In addition to HTTP-level caching, resolution clients are encouraged to perform caching at the  
3260 application level. For best results, however, resolution clients SHOULD be conservative with  
3261 caching expiration semantics, including cache expiration dates. This implies that in a series of  
3262 HTTP redirects, for example, the results of the entire process SHOULD only be cached as long  
3263 as the shortest period of time allowed by any of the intermediate HTTP responses.

3264 Because not all HTTP client libraries expose caching expiration to applications, identifier  
3265 authorities SHOULD NOT use cacheable redirects with expiration times sooner than the  
3266 expiration times of other HTTP responses in the resolution chain. In general, all XRI deployments  
3267 should be mindful of limitations in current HTTP clients and proxies.

3268 The cache expiration time of an XRD may also be explicitly limited by the parent authority. If the  
3269 expiration time in the `xrd:Expires` element is sooner than the expiration time calculated from  
3270 the HTTP caching semantics, the XRD MUST be discarded before the expiration time in  
3271 `xrd:Expires`. Note also that a `saml:Assertion` element returned during SAML trusted  
3272 resolution has its own signature expiration semantics as defined in [SAML]. While this may  
3273 invalidate the SAML signature, a resolver MAY still use the balance of the contents of the XRD if  
3274 it is not expired by HTTP caching semantics or the `xrd:Expires` element.

3275 With both application-level and HTTP-level caching, the resolution process is designed to have  
3276 minimal overhead. Resolution of each qualified subsegment of an XRI authority component is a  
3277 separate step described by a separate XRD, so intermediate results can typically be cached in  
3278 their entirety. For this reason, resolution of higher-level (i.e., further to the left) qualified  
3279 subsegments, which are common to more identifiers, will naturally result in a greater number of  
3280 cache hits than resolution of lower-level subsegments.

### 3281 16.4.2 Synonyms

3282 The publication of synonyms in XRDS documents (section 5) can further increase cache  
3283 efficiency. If an XRI resolution request produces a cache hit on a synonym, the following rules  
3284 apply:

- 3285 1. If the cache hit is on a LocalID synonym, the resolver MAY return the cached XRD  
3286 element if: a) it is from the correct ProviderID, b) it has not expired, and c) it was obtained  
3287 using the same trusted resolution and synonym verification parameters as the current  
3288 resolution request.
- 3289 2. If the cache hit is on a CanonicalID synonym, the resolver MAY return the entire cached  
3290 XRDS document if: a) it has not expired, and b) it was obtained using the same trusted  
3291 resolution and synonym verification parameters as the current resolution request.

3292 **IMPORTANT:** The effect of these rules is that the application calling an XRI resolver MAY receive  
3293 back an XRD element, or an XRDS document containing XRD element(s), in which the value of  
3294 the `<xrd:Query>` element does not match the resolution request, but in which the value of an  
3295 `<xrd:LocalID>` element does match the resolution request. This is acceptable for the generic  
3296 and HTTPS trusted resolution protocols but not the SAML trusted resolution protocol, where the  
3297 value of the `<xrd:Query>` element MUST match the resolution request as specified in section  
3298 10.2.4.

3299

## 17 Extensibility and Versioning

3300

### 17.1 Extensibility

3301

#### 17.1.1 Extensibility of XRDs

3302

The XRD schema in Appendix B use an an open-content model that is designed to be extended with other metadata. In most places, extension elements and attributes from namespaces other than `xri://$xrd*($v*2.0)` are explicitly allowed. These extension points are designed to simplify default processing using a “Must Ignore” rule. The base rule is that unrecognized elements and attributes, and the content and child elements of unrecognized elements, MUST be ignored. As a consequence, elements that would normally be recognized by a processor MUST be ignored if they appear as descendants of an unrecognized element.

3309

Extension elements MUST NOT require new interpretation of elements defined in this document. If an extension element is present, a processor MUST be able to ignore it and still correctly process the XRDS document.

3310

3311

3312

Extension specifications MAY simulate “Must Understand” behavior by applying an “enclosure” pattern. Elements defined by the XRD schema in Appendix B whose meaning or interpretation is modified by extension elements can be wrapped in an extension container element defined by the extension specification. This extension container element SHOULD be in the same namespace as the other extension elements defined by the extension specification.

3313

3314

3315

3316

3317

Using this design, all elements whose interpretations are modified by the extension will now be contained in the extension container element and thus will be ignored by clients or other applications unable to process the extension. The following example illustrates this pattern using an extension container element from an extension namespace (`other:SuperService`) that contains an extension element (`other:ExtensionElement`):

3318

3319

3320

3321

3322

```
<XRD>
  <Service>
    ...
  </Service>
  <other:SuperService>
    <Service>
      ...
      <other:ExtensionElement>...</other:ExtensionElement>
    </Service>
  </other:SuperService>
</XRD>
```

3323

3324

3325

3326

3327

3328

3329

3330

3331

3332

3333

In this example, the `other:ExtensionElement` modifies the interpretation or processing rules for the parent `xrd:Service` element and therefore must be understood by the consumer for the proper interpretation of the parent `xrd:Service` element. To preserve the correct interpretation of the `xrd:Service` element in this context, the `xrd:Service` element is “wrapped” in the `other:SuperService` element so only consumers that understand elements in the `other:SuperService` namespace will attempt to process the `xrd:Service` element.

3334

3335

3336

3337

3338

3339

The addition of extension elements does not change the requirement for SAML signatures to be verified across all elements, whether recognized or not.

3340

3341

Specifications extending XRDs MAY use the `xrd:XRD/xrd:Type` element to indicate to an XRD processor that an XRD conforms to the requirements of the extension specification. Such specification SHOULD be dereferenceable from the URI, IRI, or XRI used as the value of the

3342

3343

3344 `xrd:XRD/xrd:Type` element. However XRD processors MAY ignore instances of this element  
3345 and process the XRD as specified in this document.

**Comment [DSR7]:** Added to support addition of `xrd:XRD/xrd:Type` element to 4.2.1.

## 3346 17.1.2 Other Points of Extensibility

3347 The use of HTTP(S), XML, XRI, and URIs in the design of XRDS documents, XRD elements,  
3348 and XRI resolution architecture provides additional specific points of extensibility:

- 3349 • Specification of new resolution service types or other service types using XRIs, IRIs, or URIs  
3350 as values of the `xrd:Type` element.
- 3351 • Specification of new resolution output formats or features using media types and media type  
3352 parameters as values of the `xrd:MediaType` element as defined in [RFC2045] and  
3353 [RFC2046].
- 3354 • HTTP negotiation of content types, language, encoding, etc. as defined by [RFC2616].
- 3355 • Use of HTTP redirects (3XX) or other response codes defined by [RFC2616].
- 3356 • Use of cross-references within XRIs, particularly for associating new types of metadata with a  
3357 resource. See [XRISyntax] and [XRIMetadata].

## 3358 17.2 Versioning

3359 Versioning of the XRI specification set is expected to occur infrequently. Should it be necessary,  
3360 this section describes versioning guidelines.

3361 In general, this specification follows the same versioning guidelines as established in section  
3362 4.2.1 of [SAML]:

3363 *In general, maintaining namespace stability while adding or changing the content of a*  
3364 *schema are competing goals. While certain design strategies can facilitate such changes,*  
3365 *it is complex to predict how older implementations will react to any given change, making*  
3366 *forward compatibility difficult to achieve. Nevertheless, the right to make such changes in*  
3367 *minor revisions is reserved, in the interest of namespace stability. Except in special*  
3368 *circumstances (for example, to correct major deficiencies or to fix errors),*  
3369 *implementations should expect forward-compatible schema changes in minor revisions,*  
3370 *allowing new messages to validate against older schemas.*

3371 *Implementations SHOULD expect and be prepared to deal with new extensions and*  
3372 *message types in accordance with the processing rules laid out for those types. Minor*  
3373 *revisions MAY introduce new types that leverage the extension facilities described in [this*  
3374 *section]. Older implementations SHOULD reject such extensions gracefully when they*  
3375 *are encountered in contexts that dictate mandatory semantics.*

### 3376 17.2.1 Version Numbering

3377 Specifications from the OASIS XRI Technical Committee use a Major and Minor version number  
3378 expressed in the form Major.Minor. The version number MajorB.MinorB is higher than the version  
3379 number MajorA.MinorA if and only if:

3380  $Major_B > Major_A$  OR ( (  $Major_B = Major_A$  ) AND  $Minor_B > Minor_A$  )

### 3381 17.2.2 Versioning of the XRI Resolution Specification

3382 New releases of the XRI Resolution specification may specify changes to the resolution protocols  
3383 and/or the XRD schema in Appendix B. When changes affect either of these, the resolution  
3384 service type version number will be changed. Where changes are purely editorial, the version  
3385 number will not be changed.

3386 In general, if a change is backward-compatible, the new version will be identified using the  
3387 current major version number and a new minor version number. If the change is not backward-  
3388 compatible, the new version will be identified with a new major version number.



### 3389 **17.2.3 Versioning of Protocols**

3390 The protocols defined in this document may also be versioned by future releases of the XRI  
3391 Resolution specification. If these protocols are not backward-compatible with older  
3392 implementations, they will be assigned a new XRI with a new version identifier for use in  
3393 identifying their service type in XRDs. See section 3.1.2.

3394 Note that it is possible for version negotiation to happen in the protocol itself. For example, HTTP  
3395 provides a mechanism to negotiate the version of the HTTP protocol being used. If and when an  
3396 XRI resolution protocol provides its own version-negotiation mechanism, the specification is likely  
3397 to continue to use the same XRI to identify the protocol as was used in previous versions of the  
3398 XRI Resolution specification.

### 3399 **17.2.4 Versioning of XRDs**

3400 The `xrd:XRDS` document element is intended to be a completely generic container, i.e., to have  
3401 no specific knowledge of the elements it may contain. Therefore it has no version indicator, and  
3402 can remain stable indefinitely because there is no need to version its namespace.

3403 The `xrd:XRD` element has a `version` attribute. This attribute is OPTIONAL for this version of  
3404 the XRI resolution specification (version 2.0). This attribute will be REQUIRED for all future  
3405 versions of this specification. When used, the value of this attribute MUST be the exact numeric  
3406 version value of the XRI Resolution specification to which its containing elements conform.

3407 When new versions of the XRI Resolution specification are released, the namespace for the XRD  
3408 schema may or may not be changed. If there is a major version number change, the namespace  
3409 for the `xrd:XRD` schema is likely to change. If there is only a minor version number change, the  
3410 namespace for the `xrd:XRD` schema may remain unchanged.

3411 Note that conformance to a specific XRD version does not preclude an author from including  
3412 extension elements from a different namespace in the XRD. See section 17.1 above.

---

## 3413 18 Security and Data Protection

3414 Significant portions of this specification deal directly with security issues; these will not be  
3415 summarized again here. In addition, basic security practices and typical risks in resolution  
3416 protocols are well-documented in many other specifications. Only security considerations directly  
3417 relevant to XRI resolution are included here.

### 3418 18.1 DNS Spoofing or Poisoning

3419 When XRI resolution is deployed to use HTTP URIs or other URIs which include DNS names, the  
3420 accuracy of the XRI resolution response may be dependent on the accuracy of DNS queries. For  
3421 those deployments where DNS is not trusted, the resolution infrastructure may be deployed with  
3422 HTTP URIs that use IP addresses in the authority portion of HTTP URIs and/or with the trusted  
3423 resolution mechanisms defined by this specification. Resolution results obtained using trusted  
3424 resolution can be evaluated independently of DNS resolution results. While this does not solve  
3425 the problem of DNS spoofing, it does allow the client to detect an error condition and reject the  
3426 resolution result as untrustworthy. In addition, **[DNSSEC]** may be considered if DNS names are  
3427 used in HTTP URIs.

### 3428 18.2 HTTP Security

3429 Many of the security considerations set forth in HTTP/1.1 **[RFC2616]** apply to XRI Resolution  
3430 protocols defined here. In particular, confidentiality of the communication channel is not  
3431 guaranteed by HTTP. Server-authenticated HTTPS should be used in cases where confidentiality  
3432 of resolution requests and responses is desired.

3433 Special consideration should be given to proxy and caching behaviors to ensure accurate and  
3434 reliable responses from resolution requests. For various reasons, network topologies increasingly  
3435 have transparent proxies, some of which may insert VIA and other headers as a consequence, or  
3436 may even cache content without regard to caching policies set by a resource's HTTP authority.

3437 Implementations of XRI Proxies and caching authorities should also take special note of the  
3438 security recommendations in HTTP/1.1 **[RFC2616]** section 15.7.

### 3439 18.3 SAML Considerations

3440 SAML trusted authority resolution must adhere to the rules defined by the SAML 2.0 Core  
3441 Specification **[SAML]**. Particularly noteworthy are the XML Transform restrictions on XML  
3442 Signature and the enforcement of the SAML Conditions element regarding the validity period.

### 3443 18.4 Limitations of Trusted Resolution

3444 While the trusted resolution protocols specified in this document provide a way to verify the  
3445 integrity of a successful XRI resolution, it may not provide a way to verify the integrity of a  
3446 resolution failure. Reasons for this limitation include the prevalence of non-malicious network  
3447 failures, the existence of denial-of-service attacks, and the ability of a man-in-the-middle attacker  
3448 to modify HTTP responses when resolution is not performed over HTTPS.

3449 Additionally, there is no revocation mechanism for the keys used in trusted resolution. Therefore,  
3450 a signed resolution's validity period should be limited appropriately to mitigate the risk of an  
3451 incorrect or invalid resolution.

## 3452 **18.5 Synonym Verification**

3453 As discussed in section 5, XRI and XRDS infrastructure has rich support for identifier synonyms,  
3454 including synonyms that cross security domains. For this reason it is particularly important that  
3455 identifier authorities, including registries, registrars, directory administrators, identity providers,  
3456 and other parties who issue XRIs and manage XRDS documents, enforce the security policies  
3457 highlighted in section 5 regarding registration and management of XRDS synonym elements.

## 3458 **18.6 Redirect and Ref Management**

3459 As discussed in sections 5.3 and 12, XRI and XRDS infrastructure includes the capability to  
3460 distribute and delegate XRDS document management across multiple network locations or  
3461 identifier authorities. Identifier authorities should follow the security precautions highlighted in  
3462 section 5.3 to ensure Redirects and Refs are properly authorized and represent the intended  
3463 delegation policies.

## 3464 **18.7 Community Root Authorities**

3465 The XRI authority information for a community root needs to be well-known to the clients that  
3466 request resolution within that community. For trusted resolution, this includes the authority  
3467 resolution service endpoint URIs, the `xrd:XRD/xrd:ProviderID`, and the `ds:KeyInfo`  
3468 information. An acceptable means of providing this information is for the community root authority  
3469 to produce a self-signed XRD and publish it to a server-authenticated HTTPS endpoint. Special  
3470 care should be taken to ensure the correctness of such an XRD; if this information is incorrect, an  
3471 attacker may be able to convince a client of an incorrect result during trusted resolution.

## 3472 **18.8 Caching Authorities**

3473 In addition to traditional HTTP caching proxies, XRI proxy resolvers may be a part of the  
3474 resolution topology. Such proxy resolvers should take special precautions against cache  
3475 poisoning, as these caching entities may represent trusted decision points within a deployment's  
3476 resolution architecture.

## 3477 **18.9 Recursing and Proxy Resolution**

3478 During recursing resolution, subsegments of the XRI authority component for which the resolving  
3479 network endpoint is not authoritative may be revealed to that service endpoint. During proxy  
3480 resolution, some or all of an XRI is provided to the proxy resolver.  
3481 In both cases, privacy considerations should be evaluated before disclosing such information.

## 3482 **18.10 Denial-Of-Service Attacks**

3483 XRI Resolution, including trusted resolution, is vulnerable to denial-of-service (DOS) attacks  
3484 typical of systems relying on DNS and HTTP(S).

3485

---

## A. Acknowledgments

3486 The editors would like to thank the following current and former members of the OASIS XRI TC  
3487 for their particular contributions to this and previous versions of this specification:

- 3488 • William Barnhill, Booz Allen and Hamilton
- 3489 • Dave McAlpin, Epok
- 3490 • Chetan Sabnis, Epok
- 3491 • Peter Davis, Neustar
- 3492 • Victor Grey, PlaNetwork
- 3493 • Mike Lindelsee, Visa International
- 3494 • Markus Sabadello, XDI.org
- 3495 • John Bradley
- 3496 • Kermit Snelson

3497 The editors would also like to acknowledge the contributions of the other members of the OASIS  
3498 XRI Technical Committee, whose other voting members at the time of publication were:

- 3499 • Geoffrey Strongin, Advanced Micro Devices
- 3500 • Ajay Madhok, AmSoft Systems
- 3501 • Dr. XiaoDong Lee, China Internet Network Information
- 3502 • Nat Sakimura, Nomura Research
- 3503 • Owen Davis, PlaNetwork
- 3504 • Fen Labalme, PlaNetwork
- 3505 • Marty Schleiff, The Boeing Company
- 3506 • Dave Wentker, Visa International
- 3507 • Paul Trevithick

3508 The editors also would like to acknowledge the following people for their contributions to previous  
3509 versions of OASIS XRI specifications (affiliations listed for OASIS members):

3510 Marc Le Maitre, Cordance Corporation; Thomas Bikeev, EAN International; Krishna Sankar,  
3511 Cisco; Winston Bumpus, Dell; Joseph Moeller, EDS; Steve Green, Epok; Lance Hood, Jerry  
3512 Kindall, Adarbad Master, Davis McPherson, Chetan Sabnis, and Loren West, Epok; Phillipe  
3513 LeBlanc, Jim Schreckengast, and Xavier Serret, Gemplus; John McGarvey, IBM; Reva Modi,  
3514 Infosys; Krishnan Rajagopalan, Novell; Masaki Nishitani, Tomonori Seki, and Tetsu Watanabe,  
3515 Nomura Research Institute; James Bryce Clark, OASIS; Marc Stephenson, TSO; Mike Mealling,  
3516 Verisign; Rajeev Maria, Terence Spielman, and John Veizades, Visa International; Lark Allen and  
3517 Michael Willett, Wave Systems; Matthew Dovey; Eamonn Neylon; Mary Nishikawa; Lars Marius  
3518 Garshol; Norman Paskin; and Bernard Vatant.

3519

## B. RelaxNG Schema for XRDS and XRD

3520

Following are the locations of the normative RelaxNG compact schema files for XRDS and XRD as defined by this specification:

3521

3522

- **xrds.rnc**: <http://docs.oasis-open.org/xri/2.0/specs/cd02/xrds.rnc>

3523

- **xrd.rnc**: <http://docs.oasis-open.org/xri/2.0/specs/cd02/xrd.rnc>

3524

**IMPORTANT:** The **xrd.rnc** schema does NOT include deprecated attribute values that are recommended for backwards compatibility. See the highlighted Backwards Compatibility notes in sections 9.1.1 and 13.3.2 for more details.

3525

3527

Listings of these files are provided in this appendix for reference but are non-normative.

3528

### **xrds.rnc**

3529

```
namespace xrds = "xri://$xrds"
```

3530

```
namespace xrd = "xri://$xrd*($v*2.0)"
```

3531

```
namespace local = ""
```

3532

```
datatypes xs = "http://www.w3.org/2001/XMLSchema-datatypes"
```

3533

```
any.element =
```

3534

```
  element * {
```

3535

```
    (attribute * { text } *
```

3536

```
    | text
```

3537

```
    | any.element)*
```

3538

```
  }
```

3539

3540

```
any.external.element =
```

3541

```
  element * - (xrd:XRD | xrds:XRDS) {
```

3542

```
    (attribute * { text } *
```

3543

```
    | text
```

3544

```
    | any.element)*
```

3545

```
  }
```

3546

3547

```
other.attribute = attribute * - (local:*) {text}
```

3548

3549

```
start = XRDS
```

3550

3551

```
XRDS = element xrds:XRDS {
```

3552

```
  other.attribute *,
```

3553

```
  (attribute ref { xs:anyURI } | attribute redirect { xs:anyURI } )?,
```

3554

```
  (any.external.element | XRDS | external "xrd.rnc" )*
```

3555

```
}
```

3556

3557

3558

### **xrd.rnc**

3559

```
default namespace = "xri://$xrd*($v*2.0)"
```

3560

```
namespace xrd = "xri://$xrd*($v*2.0)"
```

3561

```
namespace saml = "urn:oasis:names:tc:SAML:2.0:assertion"
```

3562

```
namespace ds = "http://www.w3.org/2000/09/xmldsig#"
```

3563

```
namespace local = ""
```

3564

3565

```
datatypes xs = "http://www.w3.org/2001/XMLSchema-datatypes"
```

3566

3567

```
start = XRD
```

3568

3569

```
anyelementbody =
```

3570

```
  (attribute * {text}
```

3571

```
  | text
```

3572

```
  | element * {anyelementbody} )*
```

3573

```

3574 non.xrd.element = element * - xrd:* {
3575     anyelementbody
3576 }
3577
3578 other.attribute = attribute * - (local:* | xrd:* ) {text}
3579
3580
3581 XRD = element XRD {
3582     other.attribute *,
3583     attribute idref {xs:IDREF} ?,
3584     attribute version { "2.0" } ?,
3585     Type *,
3586     Query ?,
3587     Status ?,
3588     ServerStatus ?,
3589     Expires ?,
3590     ProviderID ?,
3591     (Redirect | Ref) ?,
3592     LocalID *,
3593     EquivID *,
3594     CanonicalID ?,
3595     CanonicalEquivID ?,
3596     Service *,
3597     element saml:Assertion {anyelementbody} ?,
3598     non.xrd.element *
3599 }
3600
3601 Query = element Query {
3602     other.attribute *,
3603     text
3604 }
3605
3606 statuspattern =
3607     other.attribute *,
3608     attribute code {xs:integer},
3609     attribute cid { "absent" | "off" | "verified" | "failed" } ?,
3610     attribute ceid { "absent" | "off" | "verified" | "failed" } ?,
3611     text
3612
3613 Status = element Status {
3614     statuspattern
3615 }
3616
3617 ServerStatus = element ServerStatus {
3618     statuspattern
3619 }
3620
3621 Expires = element Expires {
3622     other.attribute *,
3623     xs:dateTime
3624 }
3625
3626 ProviderID = element ProviderID {
3627     other.attribute *,
3628     xs:anyURI
3629 }
3630
3631 Redirect = element Redirect {
3632     other.attribute *,
3633     attribute priority {xs:integer}?,
3634     xs:anyURI
3635 }
3636
3637 Ref = element Ref{
3638     other.attribute *,
3639     attribute priority {xs:integer}?,
3640     xs:anyURI
3641 }
3642

```

**Comment [DSR8]:** Added per 4.2.1. Gabe, is there anything else we need to do? Note that the Type element we defined at the Service level has match and select attributes whereas this one doesn't (or doesn't need to).

```

3643 LocalID = element LocalID {
3644     other.attribute *,
3645     attribute priority {xs:integer} ?,
3646     xs:anyURI
3647 }
3648
3649 EquivID = element EquivID {
3650     other.attribute *,
3651     attribute priority {xs:integer} ?,
3652     xs:anyURI
3653 }
3654
3655 CanonicalID = element CanonicalID {
3656     other.attribute *,
3657     xs:anyURI
3658 }
3659
3660 CanonicalEquivID = element CanonicalEquivID {
3661     other.attribute *,
3662     xs:anyURI
3663 }
3664
3665 Service = element Service {
3666     other.attribute *,
3667     attribute priority {xs:integer}?,
3668     ProviderID?,
3669     Type *,
3670     Path *,
3671     MediaType *,
3672     (URI+|Redirect+|Ref+)?,
3673     LocalID *,
3674     element ds:KeyInfo {anyelementbody}?,
3675     non.xrd.element *
3676 }
3677
3678 URI = element URI {
3679     other.attribute *,
3680     attribute priority {xs:integer}?,
3681     attribute append {"none" | "local" | "authority" | "path" | "query" | "qxri"} ?,
3682     xs:anyURI
3683 }
3684
3685 selection.attributes = attribute match {"any" | "default" | "non-null" | "null" } ?,
3686     attribute select { xs:boolean } ?
3687
3688 Type = element Type {
3689     other.attribute *,
3690     selection.attributes,
3691     xs:anyURI
3692 }
3693
3694 Path = element Path {
3695     other.attribute *,
3696     selection.attributes,
3697     xs:string
3698 }
3699
3700 MediaType = element MediaType {
3701     other.attribute *,
3702     selection.attributes,
3703     xs:string
3704 }

```

3705

## C. XML Schema for XRDS and XRD

3706 Following are the locations of the non-normative W3C XML Schema files for XRDS and XRD as  
3707 defined by this specification. Note that these are provided for reference only as they are not able  
3708 to fully express the extensibility semantics of the RelaxNG versions.

3709 • **xrds.xsd**: <http://docs.oasis-open.org/xri/2.0/specs/cd02/xrds.xsd>

3710 • **xrd.xsd**: <http://docs.oasis-open.org/xri/2.0/specs/cd02/xrd.xsd>

3711 **IMPORTANT**: The **xrd.xsd** schema does NOT include deprecated attribute values that are  
3712 recommended for backwards compatibility. See the highlighted Backwards Compatibility notes in  
3713 sections 9.1.1 and 13.3.2 for more details.

3714 Listings of these files are provided in this appendix for reference.

### 3715 **xrds.xsd**

```
3716 <?xml version="1.0" encoding="UTF-8"?>
3717 <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:xrds="xri://$xrds"
3718 targetNamespace="xri://$xrds" elementFormDefault="qualified">
3719   <!-- Utility patterns -->
3720   <xs:attributeGroup name="otherattribute">
3721     <xs:anyAttribute namespace="##other" processContents="lax"/>
3722   </xs:attributeGroup>
3723   <xs:group name="otherelement">
3724     <xs:choice>
3725       <xs:any namespace="##other" processContents="lax"/>
3726       <xs:any namespace="##local" processContents="lax"/>
3727     </xs:choice>
3728   </xs:group>
3729   <!-- Patterns for elements -->
3730   <xs:element name="XRDS">
3731     <xs:complexType>
3732       <xs:sequence>
3733         <xs:group ref="xrds:otherelement" minOccurs="0" maxOccurs="unbounded"/>
3734       </xs:sequence>
3735       <xs:attributeGroup ref="xrds:otherattribute"/>
3736       <!--XML Schema does not currently offer a means to express that only one of
3737 the following two attributes may be used in any XRDS element, i.e., an XRDS document may
3738 describe EITHER a redirect identifier or a ref identifier but not both.-->
3739       <xs:attribute name="redirect" type="xs:anyURI" use="optional"/>
3740       <xs:attribute name="ref" type="xs:anyURI" use="optional"/>
3741     </xs:complexType>
3742   </xs:element>
3743 </xs:schema>
```

### 3746 **xrd.xsd**

```
3747 <?xml version="1.0" encoding="UTF-8"?>
3748 <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"
3749 xmlns:ds="http://www.w3.org/2000/09/xmldsig#" xmlns:xrd="xri://$xrd*($v*2.0)"
3750 targetNamespace="xri://$xrd*($v*2.0)" elementFormDefault="qualified">
3751   <!-- Utility patterns -->
3752   <xs:attributeGroup name="otherattribute">
3753     <xs:anyAttribute namespace="##other" processContents="lax"/>
3754   </xs:attributeGroup>
3755   <xs:group name="otherelement">
3756     <xs:choice>
3757       <xs:any namespace="##other" processContents="lax"/>
3758       <xs:any namespace="##local" processContents="lax"/>
3759     </xs:choice>
3760   </xs:group>
```



```

3761 <xs:attributeGroup name="priorityAttrGrp">
3762   <xs:attribute name="priority" type="xs:nonNegativeInteger" use="optional"/>
3763 </xs:attributeGroup>
3764 <xs:attributeGroup name="codeAttrGrp">
3765   <xs:attribute name="code" type="xs:int" use="required"/>
3766 </xs:attributeGroup>
3767 <xs:attributeGroup name="verifyAttrGrp">
3768   <xs:attribute name="cid" use="optional">
3769     <xs:simpleType>
3770       <xs:restriction base="xs:string">
3771         <xs:enumeration value="absent"/>
3772         <xs:enumeration value="off"/>
3773         <xs:enumeration value="verified"/>
3774         <xs:enumeration value="failed"/>
3775       </xs:restriction>
3776     </xs:simpleType>
3777   </xs:attribute>
3778   <xs:attribute name="ceid" use="optional">
3779     <xs:simpleType>
3780       <xs:restriction base="xs:string">
3781         <xs:enumeration value="absent"/>
3782         <xs:enumeration value="off"/>
3783         <xs:enumeration value="verified"/>
3784         <xs:enumeration value="failed"/>
3785       </xs:restriction>
3786     </xs:simpleType>
3787   </xs:attribute>
3788 </xs:attributeGroup>
3789 <xs:attributeGroup name="selectionAttrGrp">
3790   <xs:attribute name="match" use="optional" default="default">
3791     <xs:simpleType>
3792       <xs:restriction base="xs:string">
3793         <xs:enumeration value="default"/>
3794         <xs:enumeration value="any"/>
3795         <xs:enumeration value="non-null"/>
3796         <xs:enumeration value="null"/>
3797       </xs:restriction>
3798     </xs:simpleType>
3799   </xs:attribute>
3800   <xs:attribute name="select" type="xs:boolean" use="optional" default="false"/>
3801 </xs:attributeGroup>
3802 <xs:attributeGroup name="appendAttrGrp">
3803   <xs:attribute name="append" use="optional" default="none">
3804     <xs:simpleType>
3805       <xs:restriction base="xs:string">
3806         <xs:enumeration value="none"/>
3807         <xs:enumeration value="local"/>
3808         <xs:enumeration value="authority"/>
3809         <xs:enumeration value="path"/>
3810         <xs:enumeration value="query"/>
3811         <xs:enumeration value="qxri"/>
3812       </xs:restriction>
3813     </xs:simpleType>
3814   </xs:attribute>
3815 </xs:attributeGroup>
3816 <xs:complexType name="URIPattern">
3817   <xs:simpleContent>
3818     <xs:extension base="xs:anyURI">
3819       <xs:attributeGroup ref="xrd:otherattribute"/>
3820     </xs:extension>
3821   </xs:simpleContent>
3822 </xs:complexType>
3823 <xs:complexType name="URIPriorityPattern">
3824   <xs:simpleContent>
3825     <xs:extension base="xrd:URIPattern">
3826       <xs:attributeGroup ref="xrd:priorityAttrGrp"/>
3827     </xs:extension>
3828   </xs:simpleContent>
3829 </xs:complexType>

```

```

3830 <xs:complexType name="URIPriorityAppendPattern">
3831 <xs:simpleContent>
3832 <xs:extension base="xrd:URIPriorityPattern">
3833 <xs:attributeGroup ref="xrd:appendAttrGrp" />
3834 </xs:extension>
3835 </xs:simpleContent>
3836 </xs:complexType>
3837 <xs:complexType name="StringPattern">
3838 <xs:simpleContent>
3839 <xs:extension base="xs:string">
3840 <xs:attributeGroup ref="xrd:otherattribute" />
3841 </xs:extension>
3842 </xs:simpleContent>
3843 </xs:complexType>
3844 <xs:complexType name="StringSelectionPattern">
3845 <xs:simpleContent>
3846 <xs:extension base="xrd:StringPattern">
3847 <xs:attributeGroup ref="xrd:selectionAttrGrp" />
3848 </xs:extension>
3849 </xs:simpleContent>
3850 </xs:complexType>
3851 <!-- Patterns for elements -->
3852 <xs:element name="XRD">
3853 <xs:complexType>
3854 <xs:sequence>
3855 <xs:element ref="xrd:Type" minOccurs="0" maxOccurs="unbounded" />
3856 <xs:element ref="xrd:Query" minOccurs="0" />
3857 <xs:element ref="xrd:Status" minOccurs="0" />
3858 <xs:element ref="xrd:ServerStatus" minOccurs="0" />
3859 <xs:element ref="xrd:Expires" minOccurs="0" />
3860 <xs:element ref="xrd:ProviderID" minOccurs="0" />
3861 <xs:choice>
3862 <xs:element ref="xrd:Redirect" minOccurs="0" maxOccurs="unbounded" />
3863 <xs:element ref="xrd:Ref" minOccurs="0" maxOccurs="unbounded" />
3864 </xs:choice>
3865 <xs:element ref="xrd:LocalID" minOccurs="0" maxOccurs="unbounded" />
3866 <xs:element ref="xrd:EquipID" minOccurs="0" maxOccurs="unbounded" />
3867 <xs:element ref="xrd:CanonicalID" minOccurs="0" maxOccurs="unbounded" />
3868 <xs:element ref="xrd:CanonicalEquipID" minOccurs="0"
3869 maxOccurs="unbounded" />
3870 <xs:element ref="xrd:Service" minOccurs="0" maxOccurs="unbounded" />
3871 <xs:group ref="xrd:otherelement" minOccurs="0" maxOccurs="unbounded" />
3872 </xs:sequence>
3873 <xs:attribute name="idref" type="xs:IDREF" use="optional" />
3874 <xs:attribute name="version" type="xs:string" use="optional" fixed="2.0" />
3875 <xs:attributeGroup ref="xrd:otherattribute" />
3876 </xs:complexType>
3877 </xs:element>
3878 <xs:element name="Query" type="xrd:StringPattern" />
3879 <xs:element name="Status">
3880 <xs:complexType>
3881 <xs:simpleContent>
3882 <xs:extension base="xrd:StringPattern">
3883 <xs:attributeGroup ref="xrd:codeAttrGrp" />
3884 <xs:attributeGroup ref="xrd:verifyAttrGrp" />
3885 <xs:attributeGroup ref="xrd:otherattribute" />
3886 </xs:extension>
3887 </xs:simpleContent>
3888 </xs:complexType>
3889 </xs:element>
3890 <xs:element name="ServerStatus">
3891 <xs:complexType>
3892 <xs:simpleContent>
3893 <xs:extension base="xrd:StringPattern">
3894 <xs:attributeGroup ref="xrd:codeAttrGrp" />
3895 <xs:attributeGroup ref="xrd:otherattribute" />
3896 </xs:extension>
3897 </xs:simpleContent>
3898 </xs:complexType>
3899 </xs:element>

```

Comment [DSR9]: New per 4.2.1. Gabe, same question as above. Also, if we reuse the Type element, should we move its order not within the XRD element, but within this schema document (i.e., put it before Query)?

```

3900 <xs:element name="Expires">
3901   <xs:complexType>
3902     <xs:simpleContent>
3903       <xs:extension base="xs:dateTime">
3904         <xs:attributeGroup ref="xrd:otherattribute"/>
3905       </xs:extension>
3906     </xs:simpleContent>
3907   </xs:complexType>
3908 </xs:element>
3909 <xs:element name="ProviderID" type="xrd:URIPattern"/>
3910 <xs:element name="Redirect" type="xrd:URIPriorityAppendPattern"/>
3911 <xs:element name="Ref" type="xrd:URIPriorityPattern"/>
3912 <xs:element name="LocalID">
3913   <xs:complexType>
3914     <xs:simpleContent>
3915       <xs:extension base="xrd:StringPattern">
3916         <xs:attributeGroup ref="xrd:priorityAttrGrp"/>
3917       </xs:extension>
3918     </xs:simpleContent>
3919   </xs:complexType>
3920 </xs:element>
3921 <xs:element name="EquivID" type="xrd:URIPriorityPattern"/>
3922 <xs:element name="CanonicalID" type="xrd:URIPriorityPattern"/>
3923 <xs:element name="CanonicalEquivID" type="xrd:URIPriorityPattern"/>
3924 <xs:element name="Service">
3925   <xs:complexType>
3926     <xs:sequence>
3927       <xs:element ref="xrd:ProviderID" minOccurs="0"/>
3928       <xs:element ref="xrd:Type" minOccurs="0" maxOccurs="unbounded"/>
3929       <xs:element ref="xrd:Path" minOccurs="0" maxOccurs="unbounded"/>
3930       <xs:element ref="xrd:MediaType" minOccurs="0" maxOccurs="unbounded"/>
3931       <xs:choice>
3932         <xs:element ref="xrd:URI" minOccurs="0" maxOccurs="unbounded"/>
3933         <xs:element ref="xrd:Redirect" minOccurs="0" maxOccurs="unbounded"/>
3934         <xs:element ref="xrd:Ref" minOccurs="0" maxOccurs="unbounded"/>
3935       </xs:choice>
3936       <xs:element ref="xrd:LocalID" minOccurs="0" maxOccurs="unbounded"/>
3937       <xs:group ref="xrd:otherelement" minOccurs="0" maxOccurs="unbounded"/>
3938     </xs:sequence>
3939     <xs:attributeGroup ref="xrd:priorityAttrGrp"/>
3940     <xs:attributeGroup ref="xrd:otherattribute"/>
3941   </xs:complexType>
3942 </xs:element>
3943 <xs:element name="Type">
3944   <xs:complexType>
3945     <xs:simpleContent>
3946       <xs:extension base="xrd:URIPattern">
3947         <xs:attributeGroup ref="xrd:selectionAttrGrp"/>
3948       </xs:extension>
3949     </xs:simpleContent>
3950   </xs:complexType>
3951 </xs:element>
3952 <xs:element name="Path" type="xrd:StringSelectionPattern"/>
3953 <xs:element name="MediaType" type="xrd:StringSelectionPattern"/>
3954 <xs:element name="URI" type="xrd:URIPriorityAppendPattern"/>
3955 </xs:schema>
3956

```

3957

---

## D. Media Type Definition for application/xrds+xml

3958 This section is prepared in anticipation of filing a media type registration meeting the  
3959 requirements of [RFC4288].

3960 **Type name:** application

3961 **Subtype name:** xrds+xml

3962 **Required parameters:** None

3963 **Optional parameters:** See Table 6 of this document.

3964 **Encoding considerations:** Identical to those of "application/xml" as described in [RFC3023],  
3965 Section 3.2.

3966 **Security considerations:** As defined in this specification. In addition, as this media type uses the  
3967 "+xml" convention, it shares the same security considerations as described in [RFC3023],  
3968 Section 10.

3969 **Interoperability considerations:** There are no known interoperability issues.

3970 **Published specification:** This specification.

3971 **Applications that use this media type:** Applications conforming to this specification use this  
3972 media type.

3973 **Person & email address to contact for further information:** Drummond Reed, OASIS XRI  
3974 Technical Committee Co-Chair, drummond.reed@cordance.net

3975 **Intended usage:** COMMON

3976 **Restrictions on usage:** None

3977 **Author:** OASIS XRI TC

3978 **Change controller:** OASIS XRI TC

3979

---

## E. Media Type Definition for application/xrd+xml

3980 This section is prepared in anticipation of filing a media type registration meeting the  
3981 requirements of [RFC4288].

3982 **Type name:** application

3983 **Subtype name:** xrd+xml

3984 **Required parameters:** None

3985 **Optional parameters:** See Table 6 of this document.

3986 **Encoding considerations:** Identical to those of "application/xml" as described in [RFC3023],  
3987 Section 3.2.

3988 **Security considerations:** As defined in this specification. In addition, as this media type uses the  
3989 "+xml" convention, it shares the same security considerations as described in [RFC3023],  
3990 Section 10.

3991 **Interoperability considerations:** There are no known interoperability issues.

3992 **Published specification:** This specification.

3993 **Applications that use this media type:** Applications conforming to this specification use this  
3994 media type.

3995 **Person & email address to contact for further information:** Drummond Reed, OASIS XRI  
3996 Technical Committee Co-Chair, drummond.reed@cordance.net

3997 **Intended usage:** COMMON

3998 **Restrictions on usage:** None

3999 **Author:** OASIS XRI TC

4000 **Change controller:** OASIS XRI TC

4001

## F. Example Local Resolver Interface Definition

4002

Following is a non-normative language-neutral example interface definition for a XRI resolver consistent with the requirements of this specification.

4003

4004

The interface definition is provided as five operations where each operation takes two or more of the following input parameters. These input parameters correspond to the normative text in section 8.1. In all of these parameters, the value empty string ("") is interpreted the same as the value null.

4005

4006

4007

4008

Parameter name	Description
QXRI	Query XRI as defined in section 8.1.1.
sepType	Service Types as defined in section 8.1.3
sepMediaType	Service Media Type as defined in section 8.1.4
flags	Language binding-specific representation of resolution flags defined in the following table.

4009

4010

The `flags` parameter is a binding-specific container data structure that encapsulates the following subparameters of the Resolution Output Format parameter. All of these are Boolean parameters defined in Table 6 in section 3.3.

4011

4012

4013

Subparameter	Description
https, saml	Specifies use of HTTPS or SAML trusted resolution as defined in sections 10.1 and 10.2.
refs	Specifies whether Refs should be followed during resolution as defined in section 12.4.
nodefault_t, nodefault_p, nodefault_m	Specifies whether a default match is allowed on the Type, Path, or MediaType elements respectively during service endpoint selection as defined in section 13.3.
uric	Specifies whether a resolver should automatically construct service endpoint URIs as defined in section 13.7.1.
cid	Specifies whether automatic canonical ID verification should performed as defined in section 14.3.

4014

4015

Note that one subparameter defined in in Table 6, `sep` (service endpoint), is not included in this flags table because it is implicitly represented in the operation being called. The five operations shown in the table below correspond to the five possible combinations of the value of the Resolution Output Format parameter and the `sep` subparameter. (Note that if the Resolution Output Format is URI List, the `sep` subparameter MUST be considered to be TRUE, so there is no `resolveAuthToURIList` operation.)

4016

4017

4018

4019

4020

4021

	Operation name	Resolution Output Format Parameter Value	sep Subparameter Value
1	resolveAuthToXRDS	application/xrds+xml	false
2	resolveAuthToXRD	application/xrd+xml	false
3	resolveSepToXRDS	application/xrds+xml	true
4	resolveSepToXRD	application/xrd+xml	true
5	resolveSepToURIList	text/uri-list	ignored

4022 Following is the API and descriptions of the five operations.

### 4023 1. Resolve Authority to XRDS

```
4024 Result resolveAuthToXRDS(  
4025     in string QXRI, in Flags flags);
```

- 4026 • Performs authority resolution only (sections 9 and 10) and outputs an XRDS document as  
4027 specified in section 8.2.1 when the `sep` subparameter is FALSE.
- 4028 • Only the authority component of the QXRI is processed by this function. If the QXRI contains  
4029 a path or query component, it is ignored.
- 4030 • Returns a binding-specific representation of the resolution result which may include, but is not  
4031 limited to, XRDS output, success/failure code, exceptions and error context.
- 4032 • The XRD element(s) in the output XRDS will be signed or not depending on the value of the  
4033 `saml` flag.

4034

### 4035 2. Resolve Authority to XRD

```
4036 Result resolveAuthToXRD(  
4037     in string QXRI, in Flags flags);
```

- 4038 • Performs authority resolution only (sections 9 and 10) and outputs an XRD element as  
4039 specified in section 8.2.2 when the `sep` subparameter is FALSE.
- 4040 • Only the authority component of the QXRI is processed by this function. If the QXRI contains  
4041 a path or query component, it is ignored.
- 4042 • Returns a binding-specific representation of the resolution result which may include, but is not  
4043 limited to, XRD output, success/failure code, exceptions and error context.
- 4044 • The output XRD will be signed or not depending on the value of the `saml` flag.

4045

### 4046 3. Resolve Service Endpoint to XRDS

```
4047 Result resolveSEPToXRDS (  
4048     in string QXRI, in string sepType,  
4049     in string sepMediaType, in Flags flags);
```

- 4050 • Performs authority resolution (sections 9 and 10) and service endpoint selection (section 13)  
4051 and outputs the XRDS as specified in section 8.2.1 when the `sep` subparameter is TRUE.
- 4052 • Returns a binding-specific representation of the resolution result which may include, but is not  
4053 limited to, XRDS output, success/failure code, exceptions and error context.
- 4054 • The final XRD in the output XRDS will either contain at least one instance of the requested  
4055 service endpoint or an error. *IMPORTANT: Although the resolver will perform service*  
4056 *selection, the final XRD is NOT filtered when the Resolution Output Format is an XRDS*  
4057 *document. Filtering is only performed when the Resolution Output Format is an XRD*  
4058 *document (below).*
- 4059 • The XRD element(s) in the output XRDS will be signed or not depending on the value of  
4060 `saml` flag.

4061

### 4062 4. Resolve Service Endpoint to XRD

```
4063 Result resolveSEPToXRD (  
4064     in string QXRI, in string sepType,  
4065     in string sepMediaType, in Flags flags);
```

- 4066 • Performs authority resolution (sections 9 and 10) and service endpoint selection (section 13)  
4067 and outputs an XRD as specified in section 8.2.2 when the `sep` subparameter is TRUE.
- 4068 • Returns a binding-specific representation of the resolution result which may include, but is not  
4069 limited to, XRD output, success/failure code, exceptions and error context.
- 4070 • The output XRD will contain at least one instance of the requested service endpoint or an  
4071 error. Also, all elements in the output XRD subject to the global `priority` attribute will be  
4072 returned in order of highest to lowest priority. See section 8.2.2 for details.
- 4073 • The XRD element will be signed or not depending on the value of `saml` flag, however that  
4074 signature may not be able to be independently verified because the XRD has been filtered to  
4075 contain only the selected service endpoints.

4076



4077 **5. Resolve Service Endpoint to URI List**

```
4078 Result resolveSepToURIList(  
4079     in string QXRI, in string sepType,  
4080     in string sepMediaType, in Flags flags);
```

- 4081
- 4082
- Performs authority resolution (sections 9 and 10) and service endpoint selection (section 13) and outputs a non-empty URI List or an error as specified in section 8.2.3.
- 4083
- Returns a binding-specific representation of the resolution result which may include, but not limited to, URI-list output, success/failure code, exceptions and error context.
- 4084
- If successful, the output URI-list will contain zero or more elements. It is possible that the selected service contains no URI element and it is up to the consuming application to interpret such a result.
- 4085
- 4086
- 4087
- 4088

---

## 4089 G. Revision History

4090 Committee Draft 01 of this specification was published in March 2005 and is available at:

- 4091 • <http://www.oasis-open.org/committees/download.php/11853>

4092 Significant changes were made based on implementation feedback, resulting in a new  
4093 implementers draft (Working Draft 10) published in March 2006:

- 4094 • <http://www.oasis-open.org/committees/download.php/17293>

4095 All revisions since Working Draft 10 have been tracked on the XRI Technical Committee wiki  
4096 page for Working Draft 11:

- 4097 • <http://wiki.oasis-open.org/xri/Xri2Cd02/ResWorkingDraft11>

4098 A copy of this wiki page as of the date of this specification has been archived at:

- 4099 • <http://www.oasis-open.org/committees/download.php/26277>

4100 Due to the extent of the revisions from Committee Draft 01, Committee Draft 02 should be  
4101 considered a new document.

4102 Committee Draft 03 includes the following revisions based on comments received during the  
4103 public review of Committee Draft 02:

- 4104 • The XRD elements in sections 4.2.1 – 4.2.6 were reformatted to include attribute definitions  
4105 as separate bullet points (per comment received from Eran Hammer-Lahav).
- 4106 • The `xrd:XRD/xrd:Type` element was added to reuse the  
4107 `xrd:XRD/xrd:Service/xrd:Type` element at the XRD level in order to support extension  
4108 specifications (per comment received from Eran Hammer-Lahav).
- 4109 • The wording of the bullet points in section 12.1 were clarified (per comment received from  
4110 Eran Hammer-Lahav).
- 4111 • The CanonicalID verification rule for XRIs was simplified to eliminate the need to involve the  
4112 `xrd:XRD/xrd:ProviderID` element (per suggestion from editor William Tan).

4113

Comment [DSR10]: Added to track CD03 revisions.